


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/  $h_{FE}$  Classifications & Marking

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |


/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics(Ta=25 )

|  |  |          |  |  |  |       |
|--|--|----------|--|--|--|-------|
|  |  |          |  |  |  |       |
|  |  | $\mu$    |  |  |  |       |
|  |  | $\infty$ |  |  |  |       |
|  |  | $\mu$    |  |  |  |       |
|  |  |          |  |  |  | $\mu$ |
|  |  |          |  |  |  |       |
|  |  |          |  |  |  |       |
|  |  |          |  |  |  |       |
|  |  |          |  |  |  |       |
|  |  |          |  |  |  |       |


## I Electrical Characteristic Curve

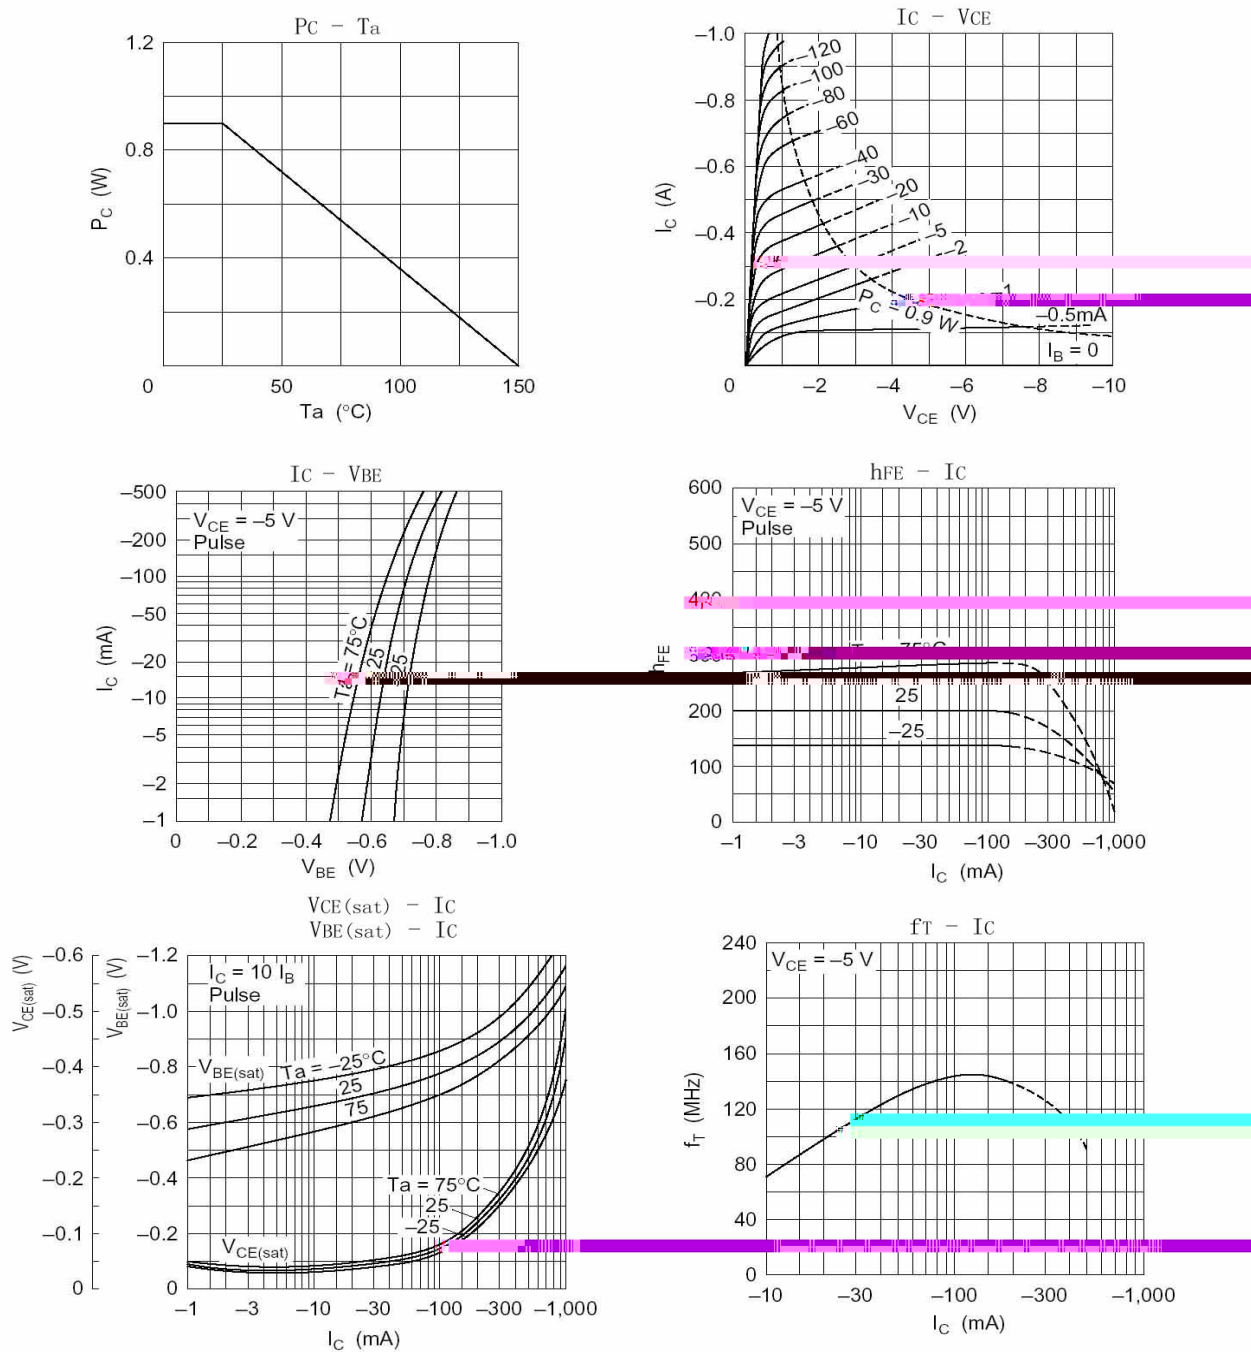


/ Package Dimensions

T0-92LM

Unit: mm

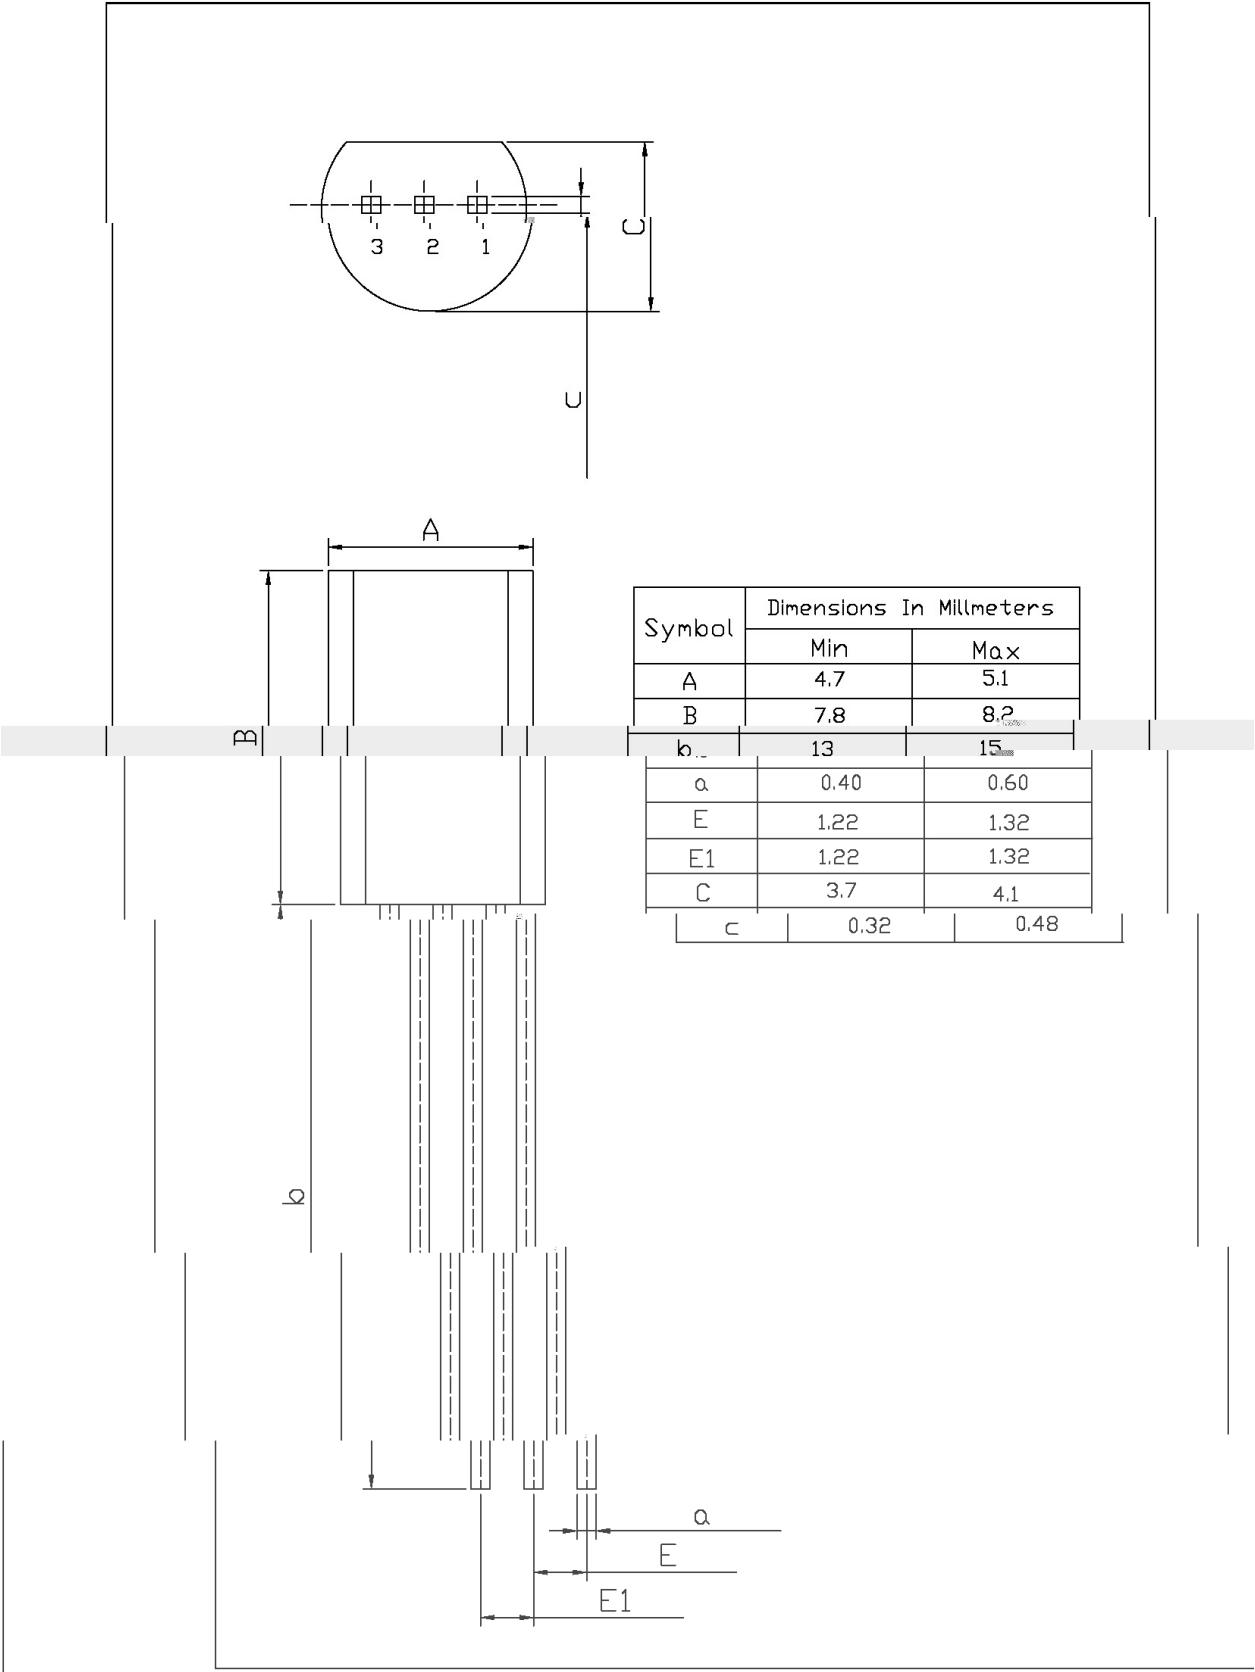

/ Marking Instructions

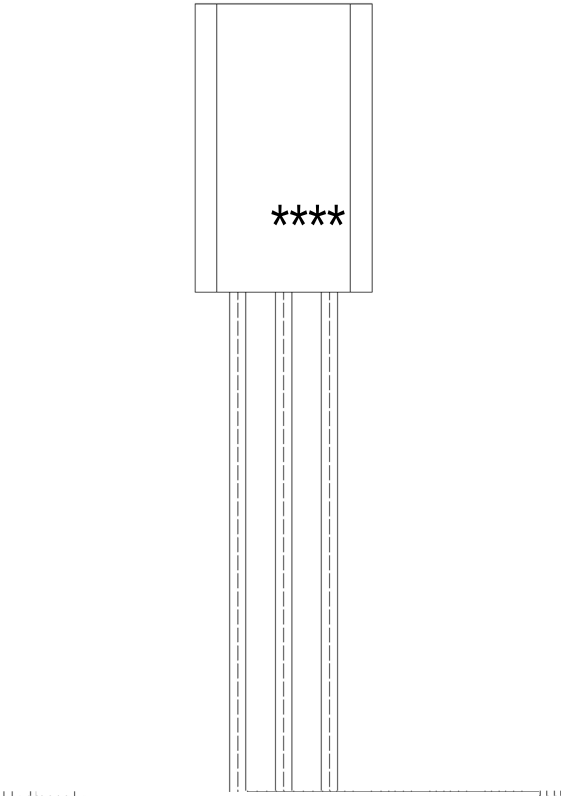

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

