



TO-220 PNP Silicon PNP transistor in a TO-220 Plastic Package.

, h_{FE}
 Low saturation voltage, excellent h_{FE} linearity and high h_{FE} .

3
 Output stage of 3 watts audio amplifier, voltage regulator, DC-DC converter and relay driver.





PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	R	Q	P	E
h_{FE} Range	60~120	100~200	160~320	200~400

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-30	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-3.0	A
Peak Collector Current	I_{CP}	-7.0	A
Collector Power Dissipation	P_C	2.0	W
	$P_C(T_C=25^\circ\text{C})$	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55~150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-30V$ $I_E=0$			-1.0	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-3.0V$ $I_C=0$			-1.0	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-2.0V$ $I_C=-1.0A$	60	160	400	
	$h_{FE(2)}$	$V_{CE}=-2.0V$ $I_C=-20mA$	30	220		
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-2.0A$ $I_B=-0.2A$		-0.3	-0.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-2.0A$ $I_B=-0.2A$		-1.0	-2.0	V
Transition Frequency	f_T	$V_{CE}=-5.0V$ $I_C=-0.1A$		80		MHz
Collector output capacitance	C_{ob}	$V_{CB}=-10V$ $I_E=0$ $f=1.0MHz$		55		pF

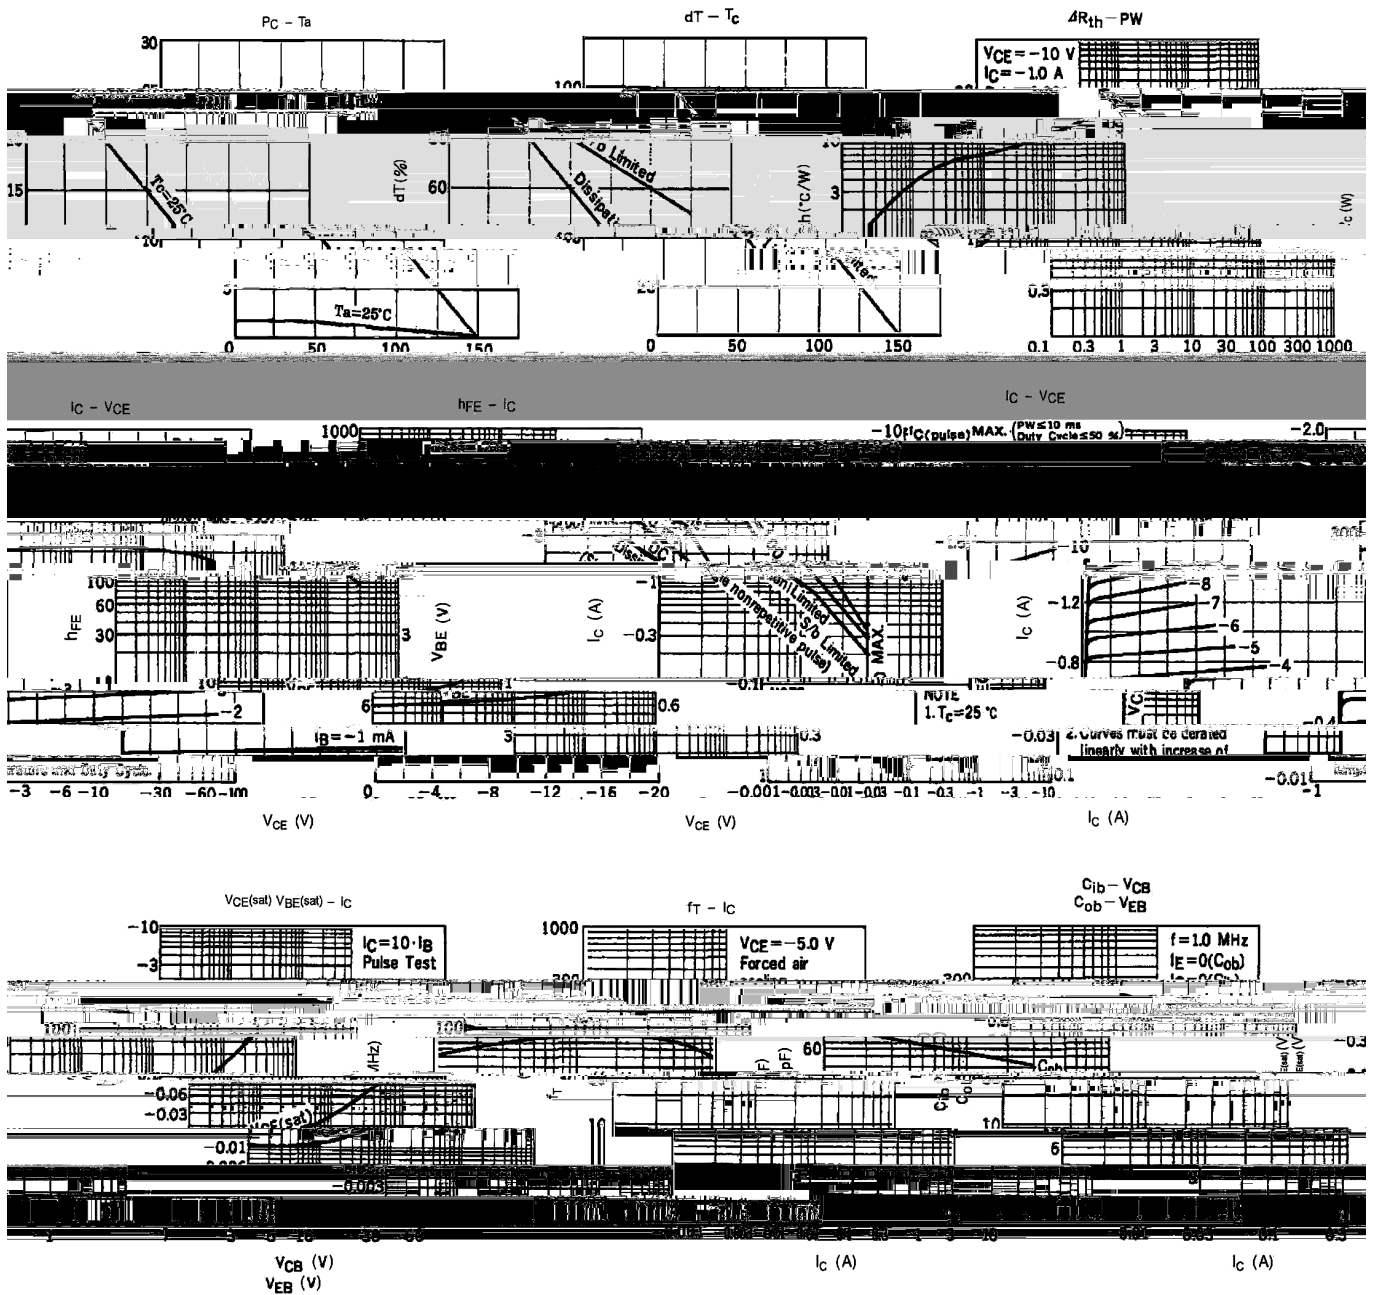

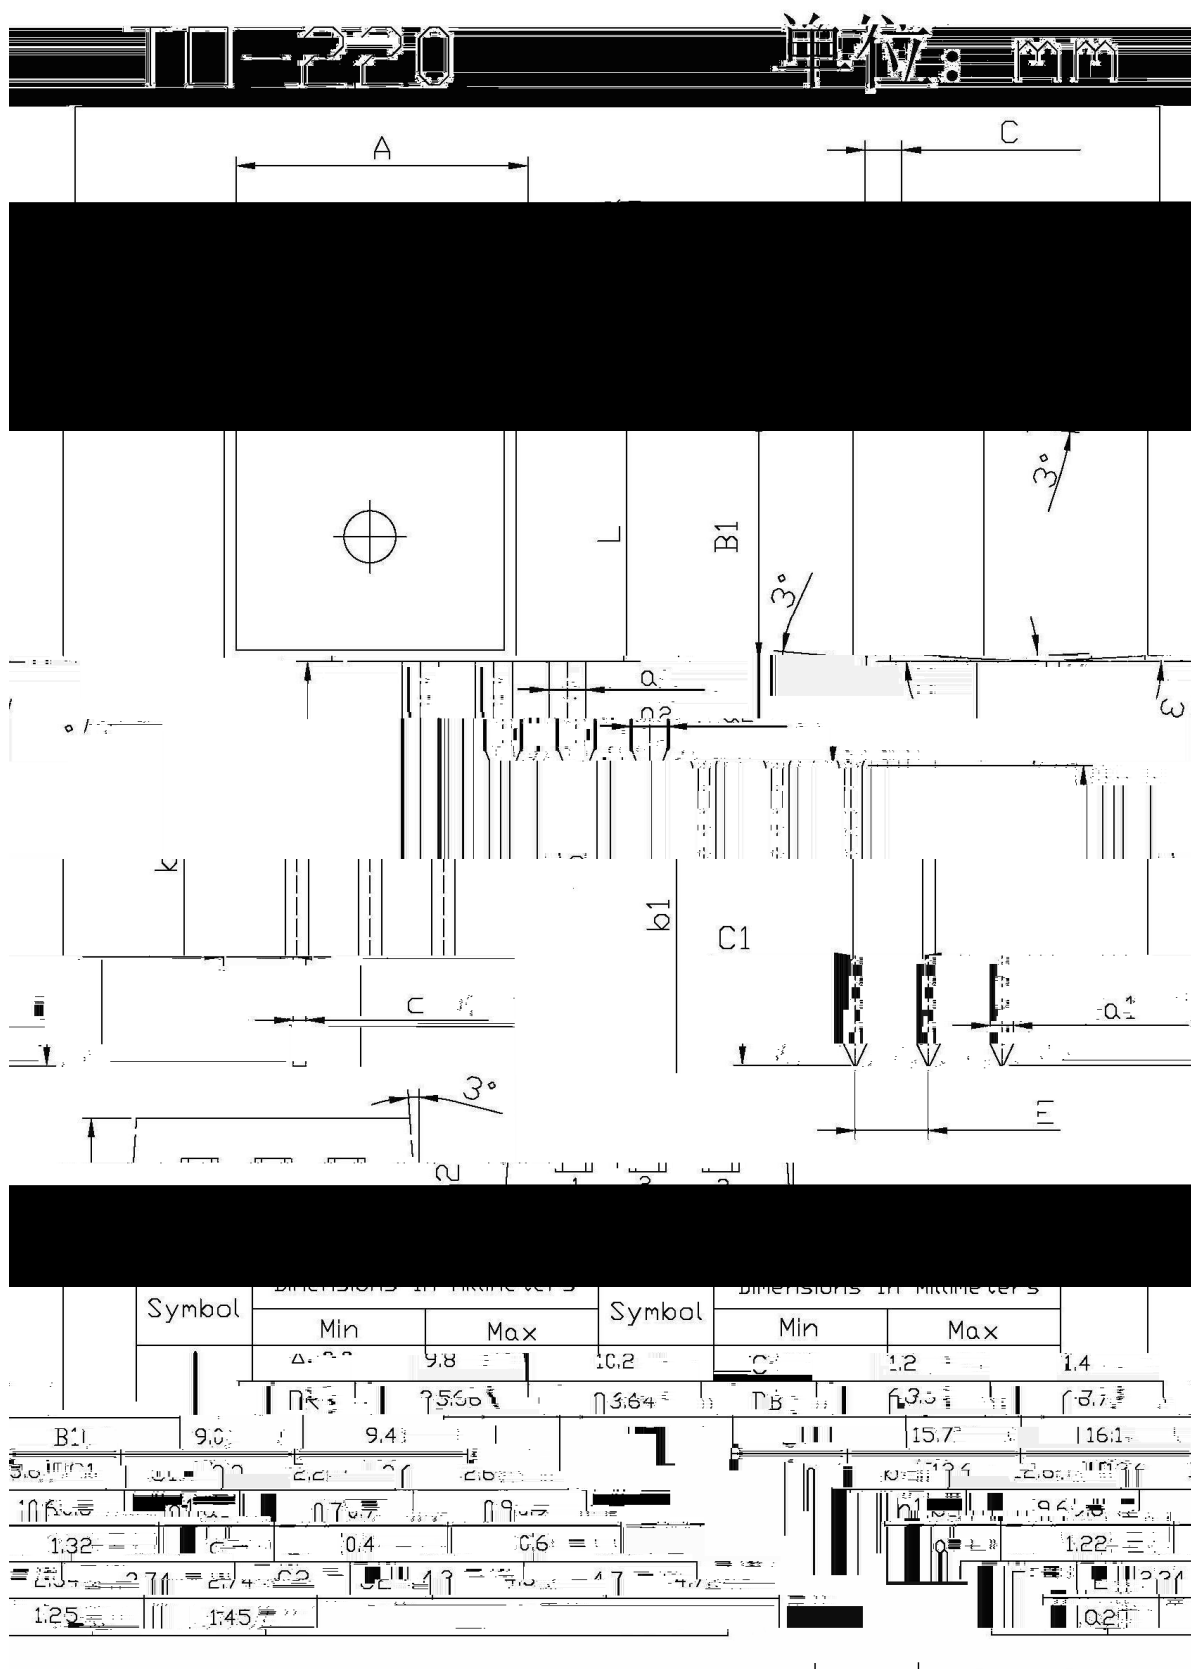

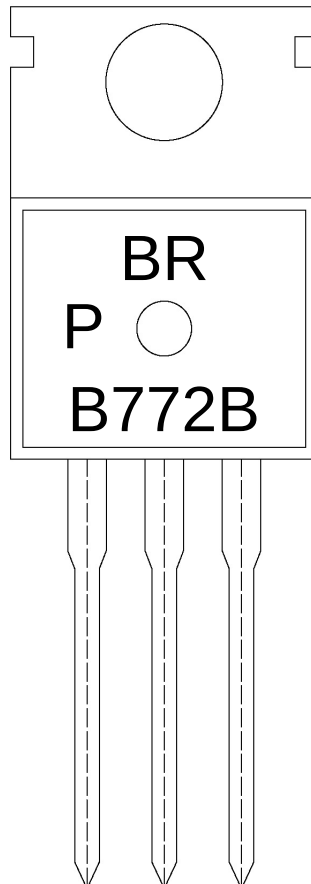

BR

B772B

P: h_{FE}


Note:

BR: Company Code

B772B: Product Type.

P: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

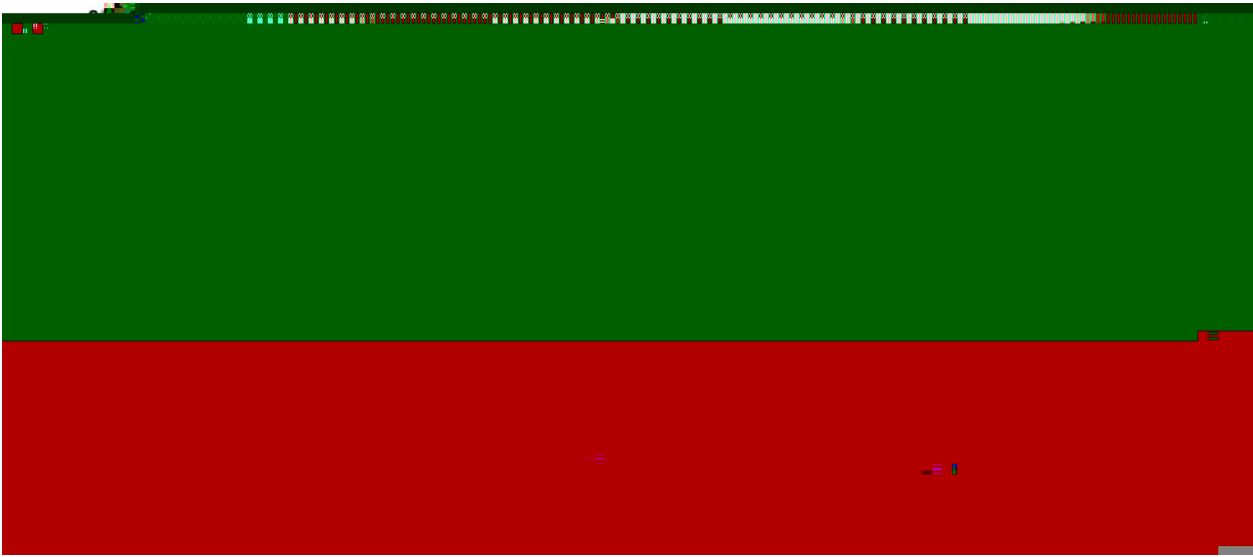

- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension		(unit mm ³)

/ TUBE

Package Type	Units					Dimension		(unit mm ³)