

/ Descriptions

TO-251 PNP


/ Features

, h_{FE}


/ Applications

3 , ,

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


	℃		
			℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
						μ

2SB772I

/ Package Dimensions

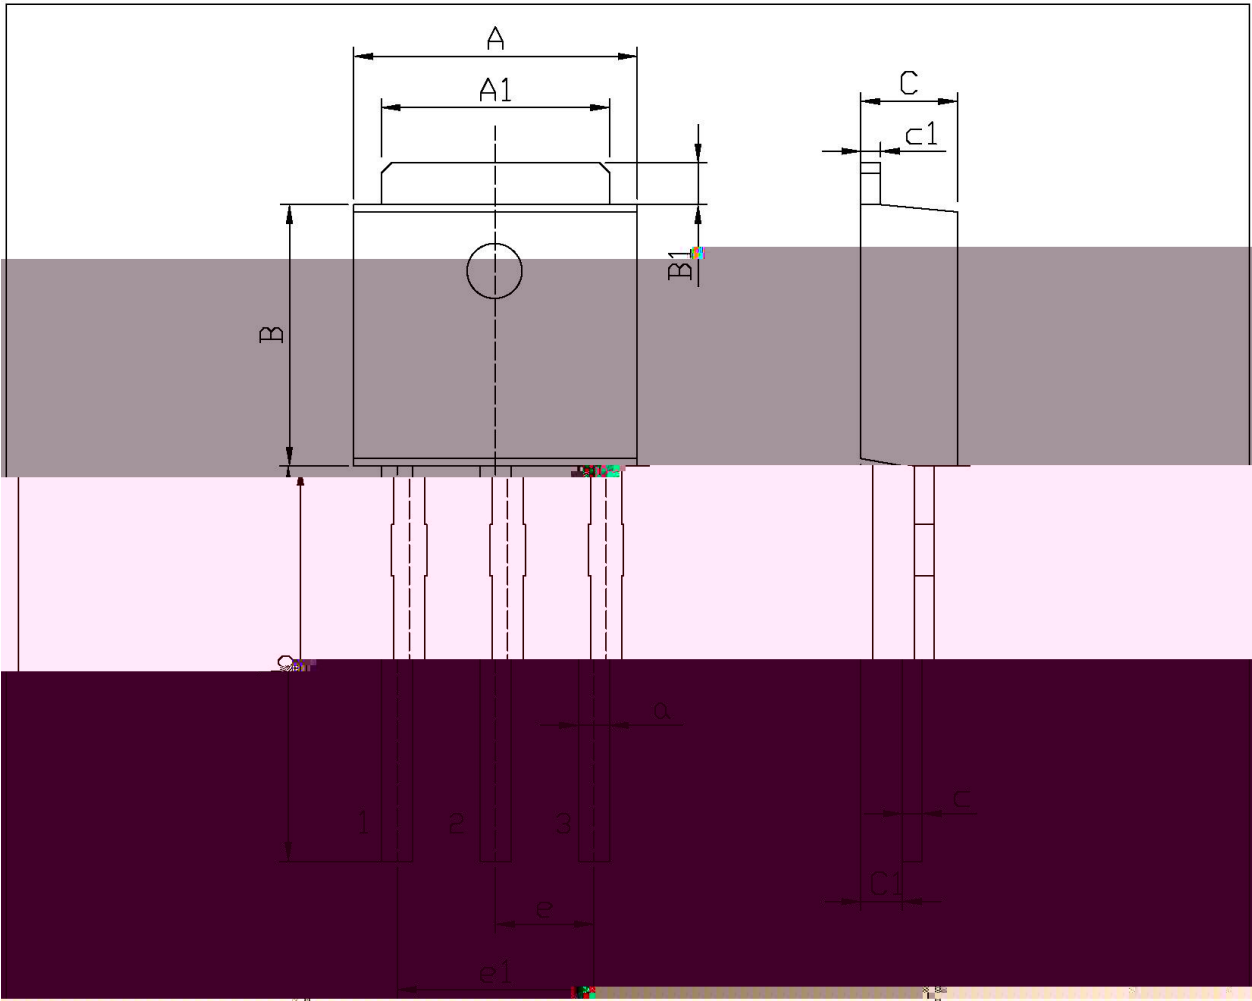


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	6.45	6.75	a	0.50	0.75
B	5.95	6.25	C	0.45	0.55
B1	0.95	1.25	c1	0.45	0.55
C	2.20	2.40	e	2.24	2.34
C1	0.95	1.15	e1	4.43	4.73

TO-251

/ Marking Instructions

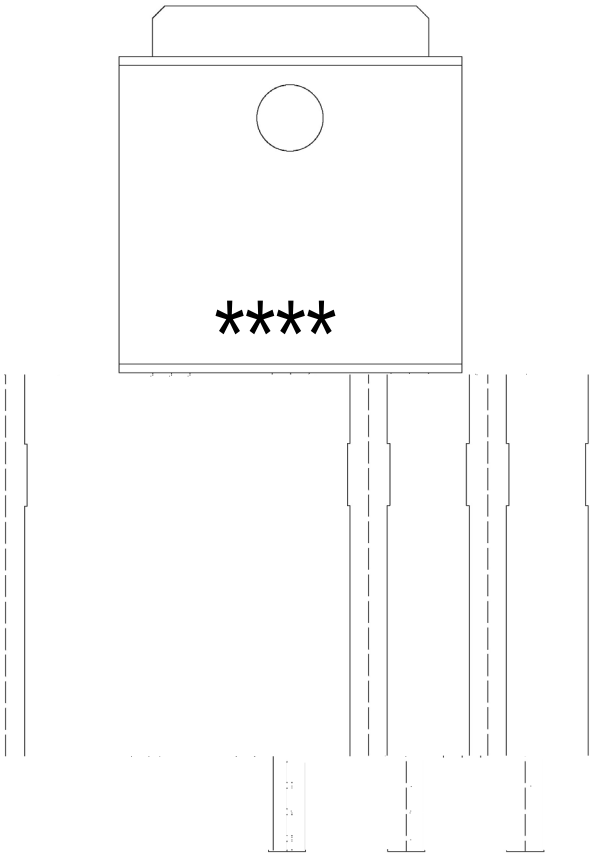

BR

B772I

P:

h_{FE}

$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad ^\circ\text{C}$$

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-251	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

6 6