


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning






/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

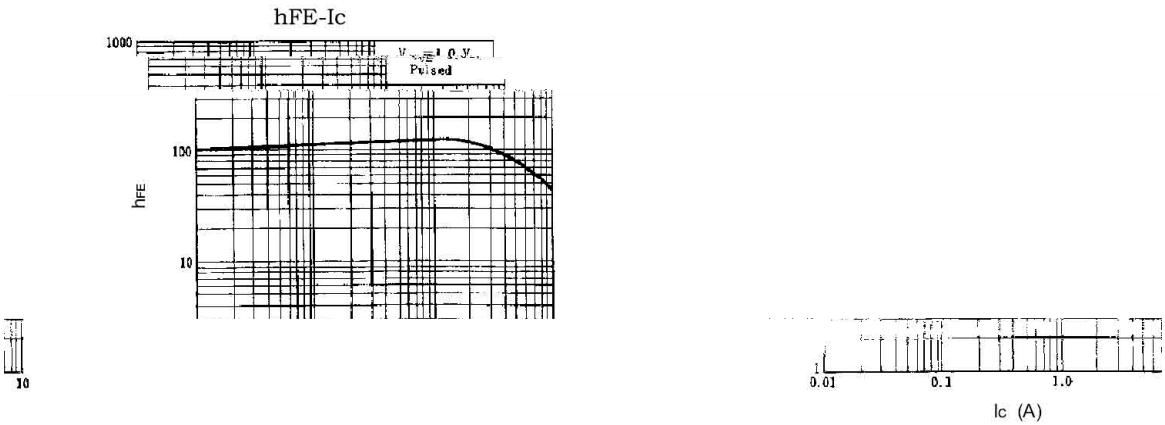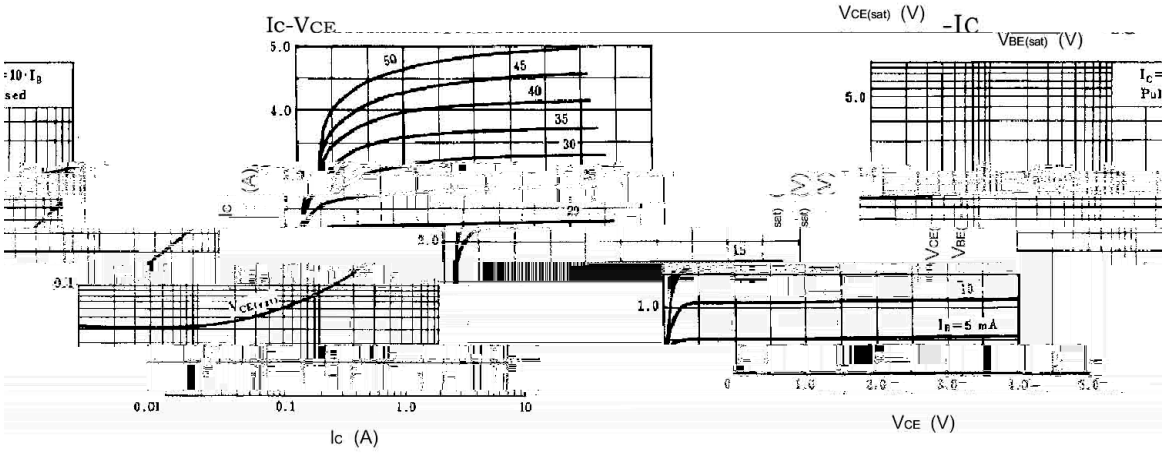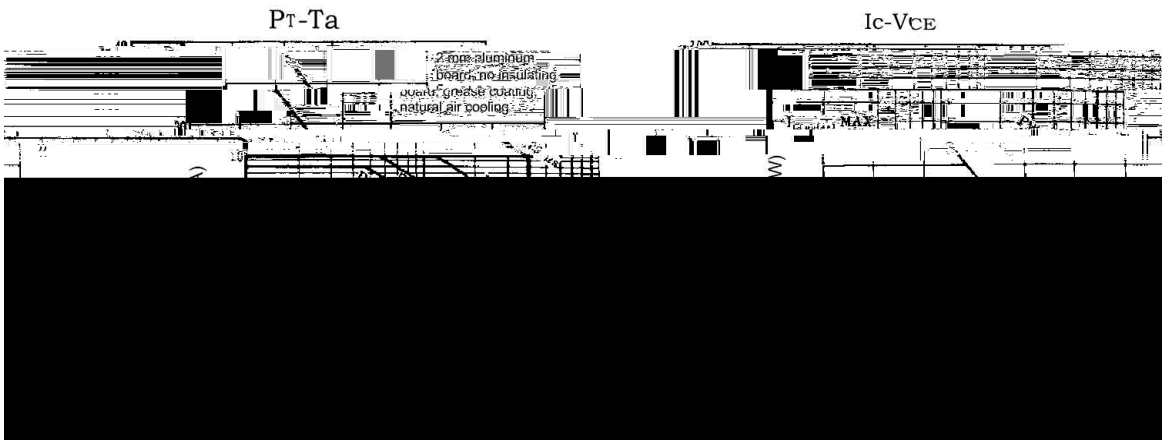


/ Package Dimensions

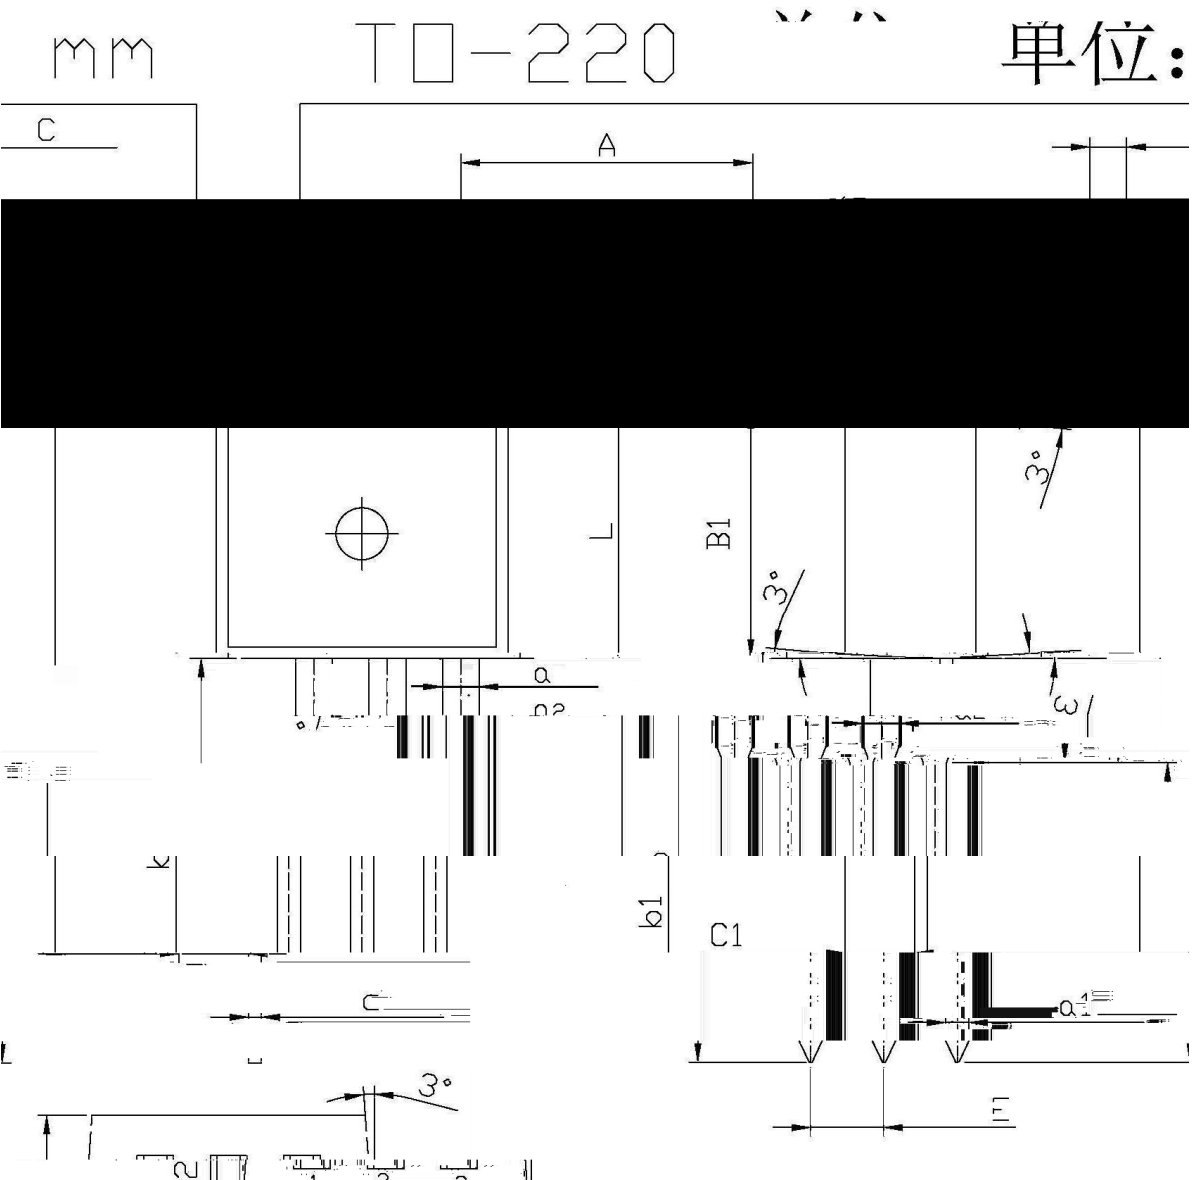


Symbol	Dimensions in millimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
	9.8	10.2		1.2	1.4
	2.55	3.64		6.35	6.75
	9.0	9.4		15.7	16.1
	2.0	2.6		12.0	13.0
	0.7	0.9		9.6	10.6
	0.4	0.6		1.22	1.32
	1.45	1.55		1.7	1.8
	1.45	1.55		1.02	1.25

/ Marking Instructions

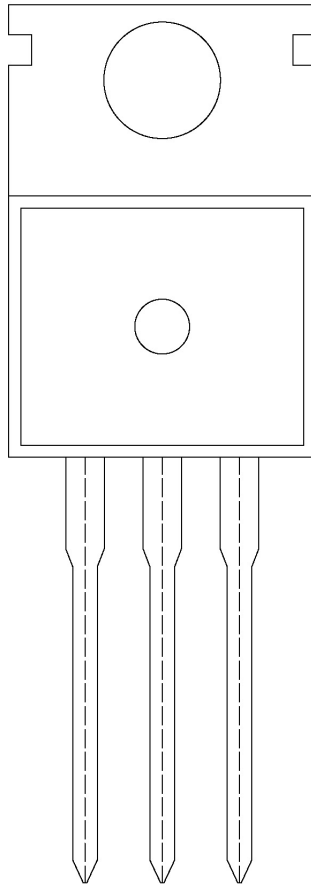

() / Temperature Profile for Dip Soldering(Pb-Free)

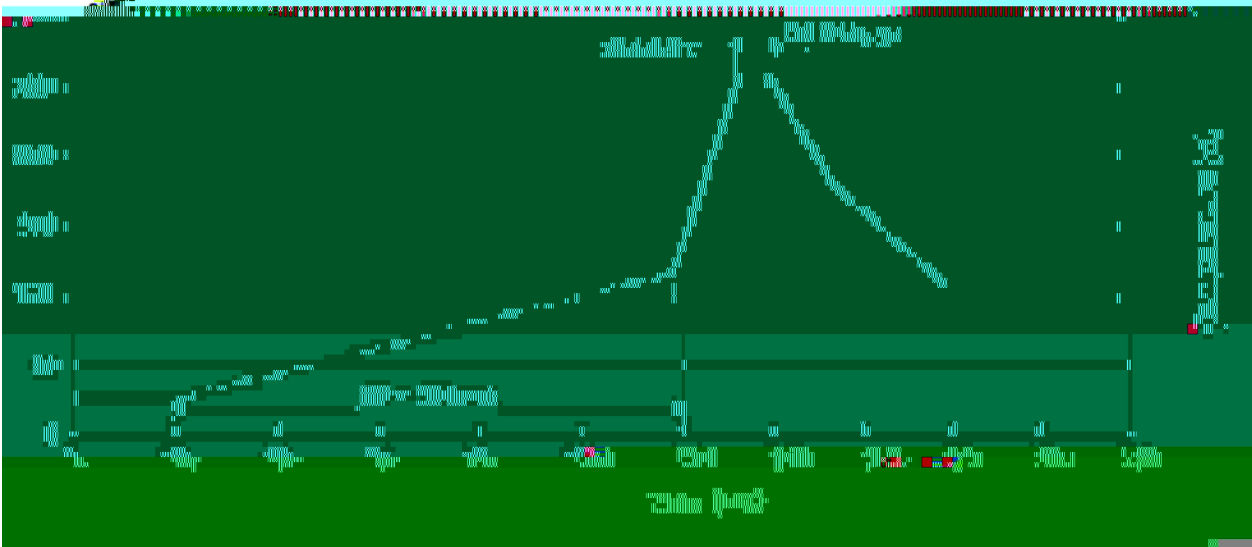

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	Inner Boxesnter Box' ? d€ H\$wB • ±10H g•@ LÅ !				