

2SC4159
Rev.F Mar.-2016

TO-220F NPN Silicon NPN transistor in a TO-220F Plastic Package.


High voltage.

Unit
V
V
V
A
A
W
°C
°C

Max	Unit
	V
	V
	V
10	A
10	A
200	
	V
1.5	V


MHzT

/ Electrical Characteristic Curve

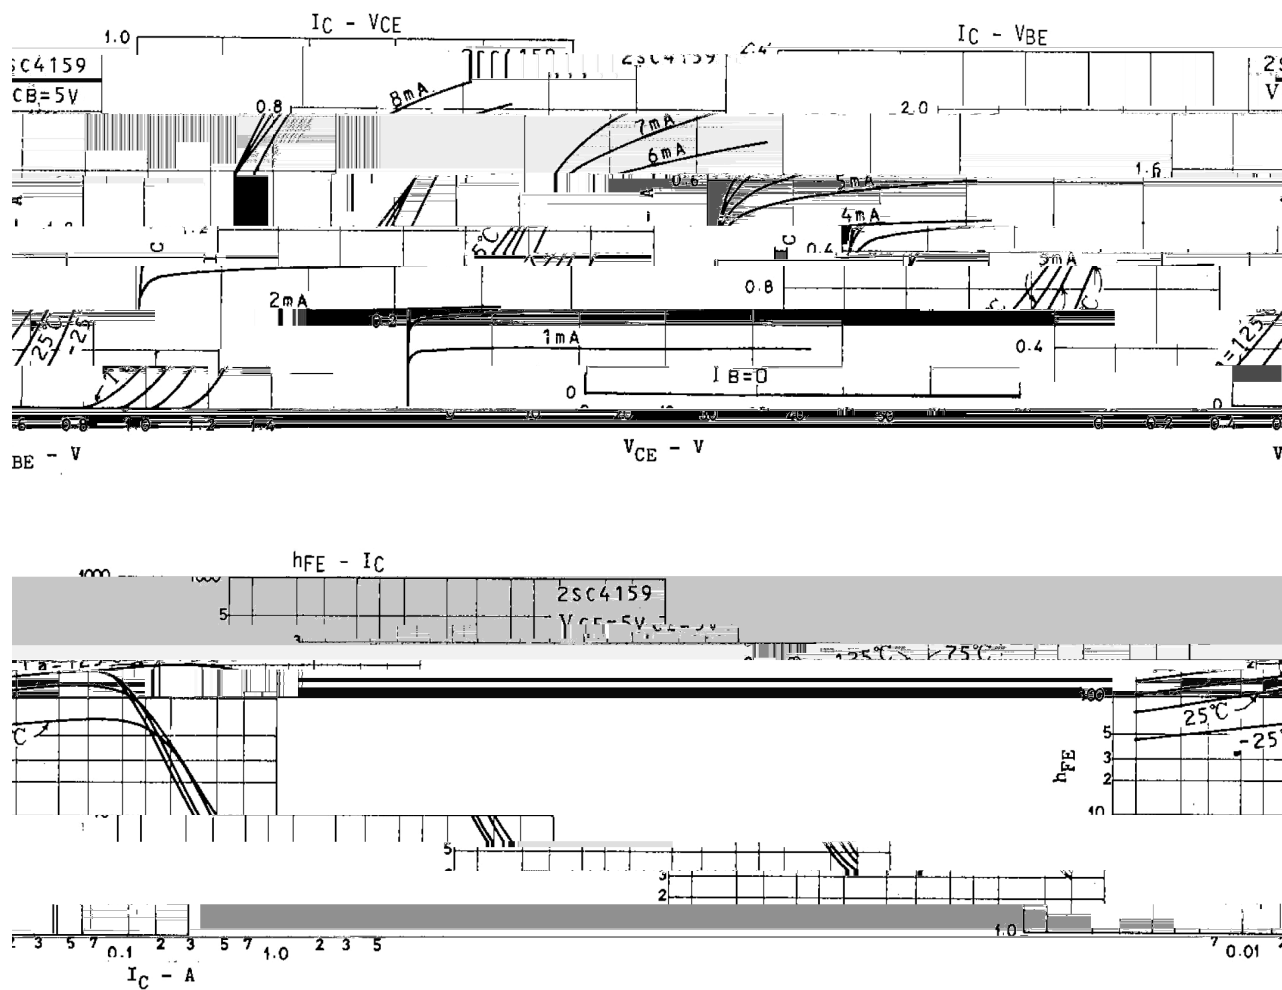


T0-220F

单位: 

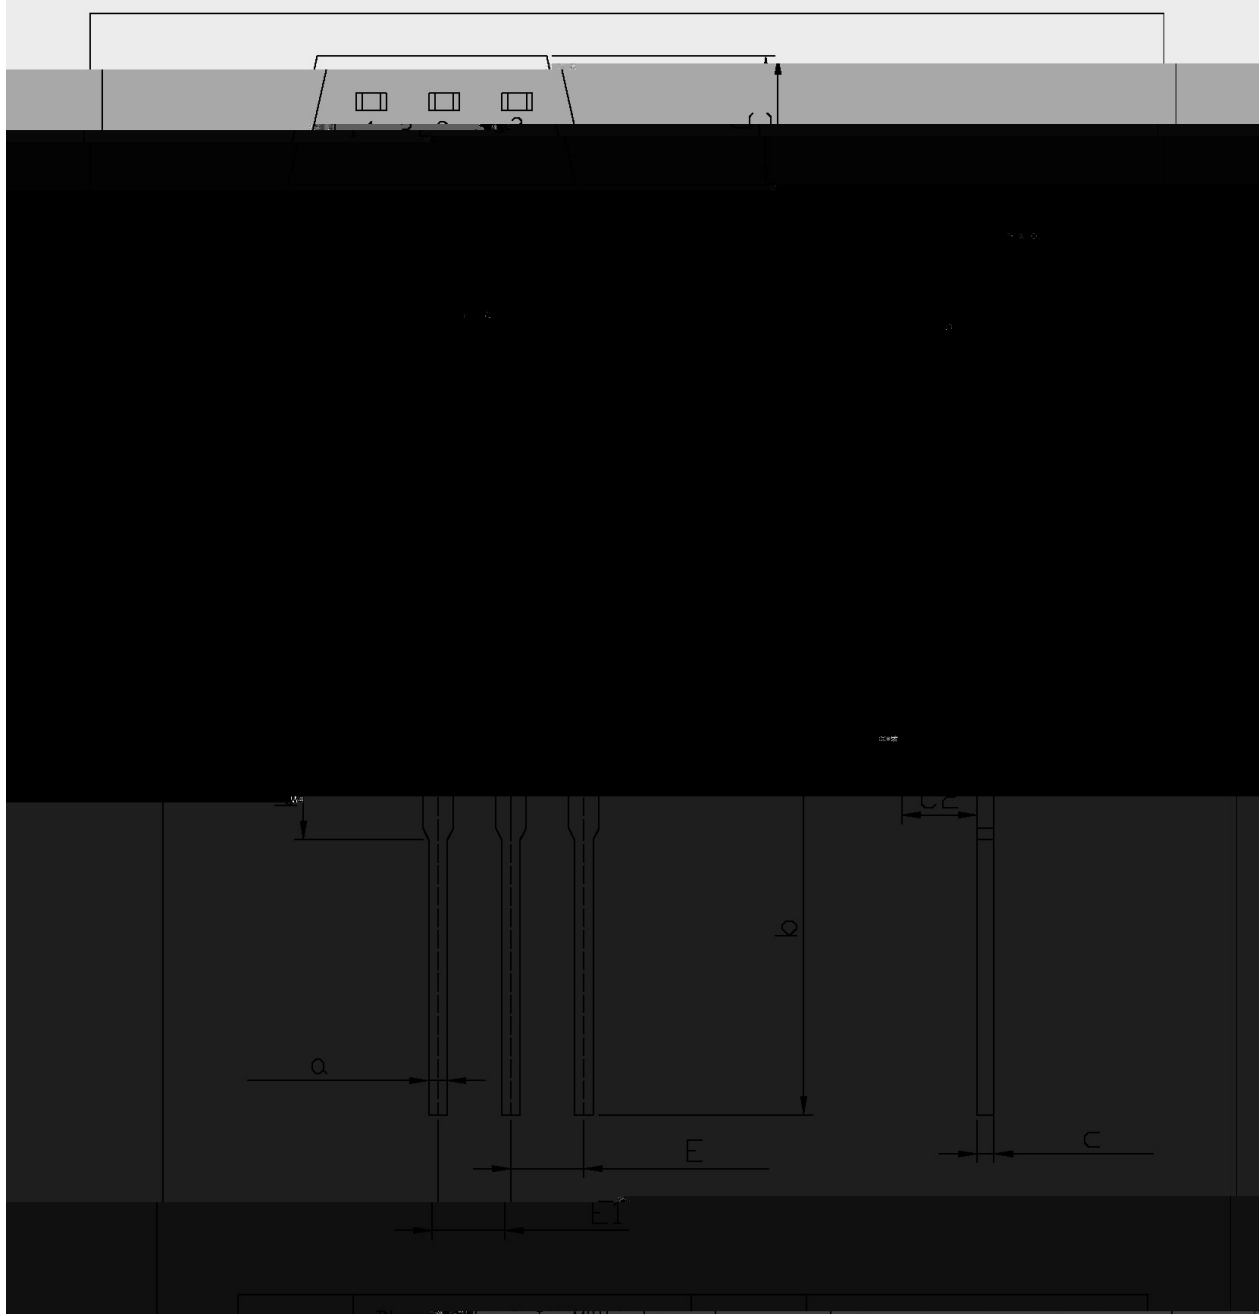

/ Marking Instructions

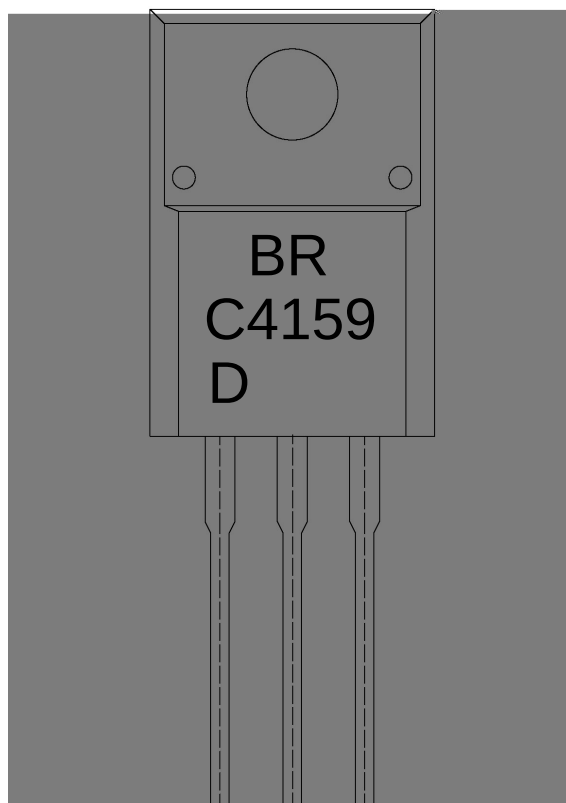

BR

C4159

D: h_{FE}

Note:


BR: Company Code.

C4159: Product Type.

D: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

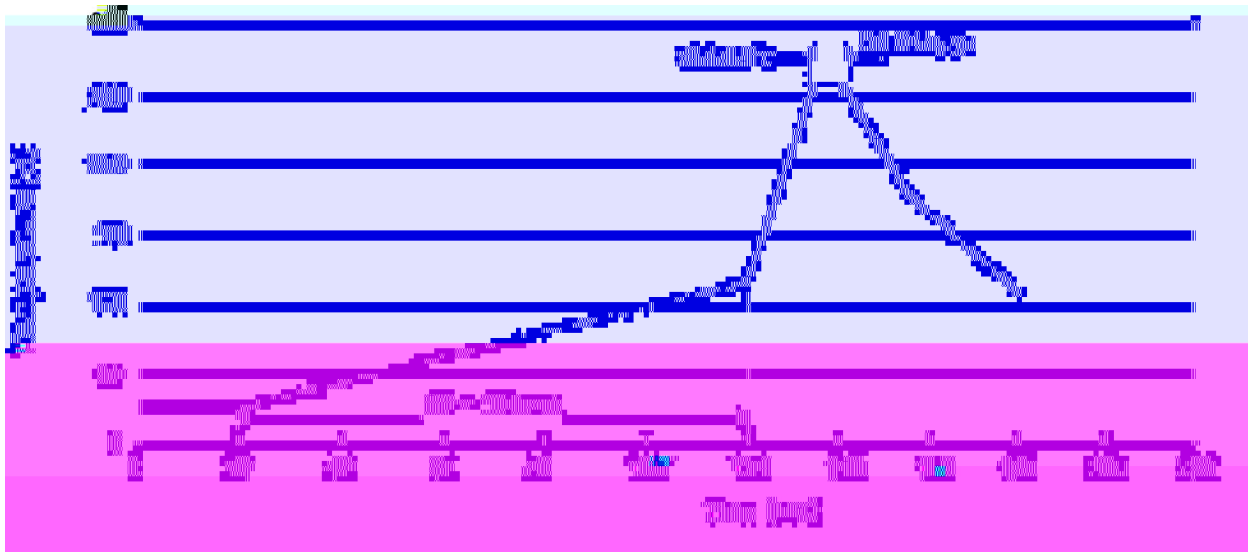

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5℃ Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只套管	套管盒	只盒	盒箱	只箱	套管	盒	箱

/ Notices