



SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.

, BC868

Low voltage, high current, Complementary to BC868.

Low voltage, high current applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter

Marking	HCEC* *
---------	------------


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-32	V
Collector to Emitter Voltage	V_{CEO}	-20	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-1.0	A
Peak Collector Current	I_{CM}	-2.0	A
Peak Base Current	I_{BM}	-200	mA
Collector Power Dissipation	P_C	1.35	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-25V$ $I_E=0$			-0.1	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=-5.0V$ $I_C=0$			-0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-1.0V$ $I_C=-500mA$	100		375	
	$h_{FE(2)}$	$V_{CE}=-10V$ $I_C=-5.0mA$	50			
	$h_{FE(3)}$	$V_{CE}=-1.0V$ $I_C=-1.0A$	60			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-1.0A$ $I_B=-100mA$			-500	mV
Base to Emitter Voltage	$V_{BE(1)}$	$I_C=-5.0mA$ $V_{CE}=-10V$		-620		mV
	$V_{BE(2)}$	$I_C=-1.0A$ $V_{CE}=-1.0V$			-1.0	V
Transition Frequency	f_T	$V_{CE}=-5.0V$ $I_C=-10mA$ $f=100MHz$	40			MHz

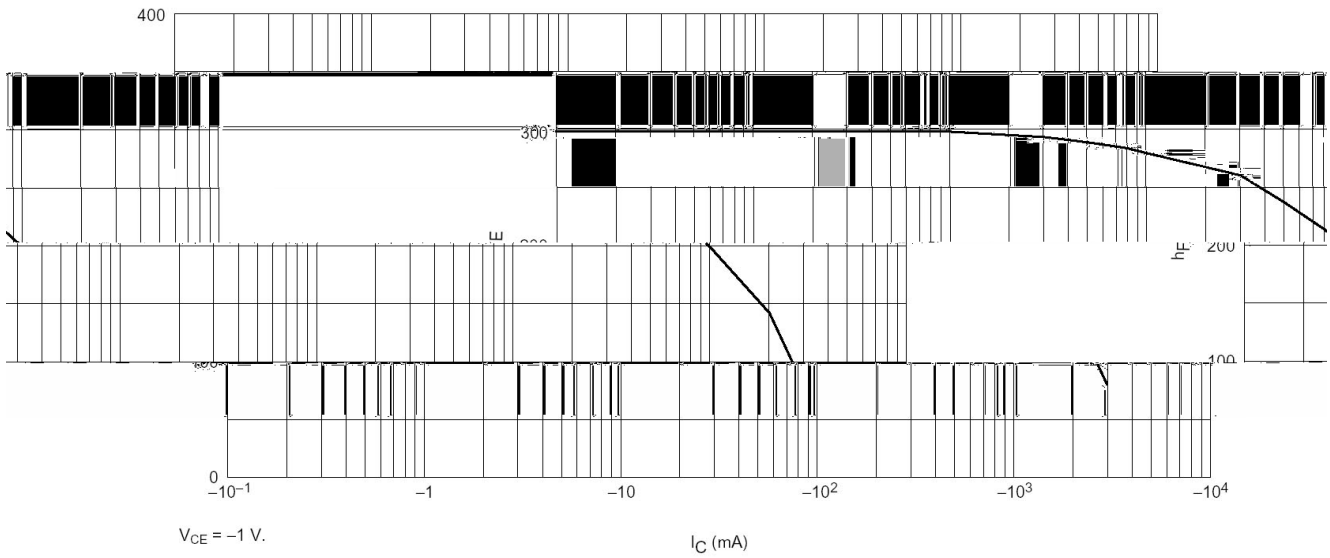

SOT-89

单位: mm

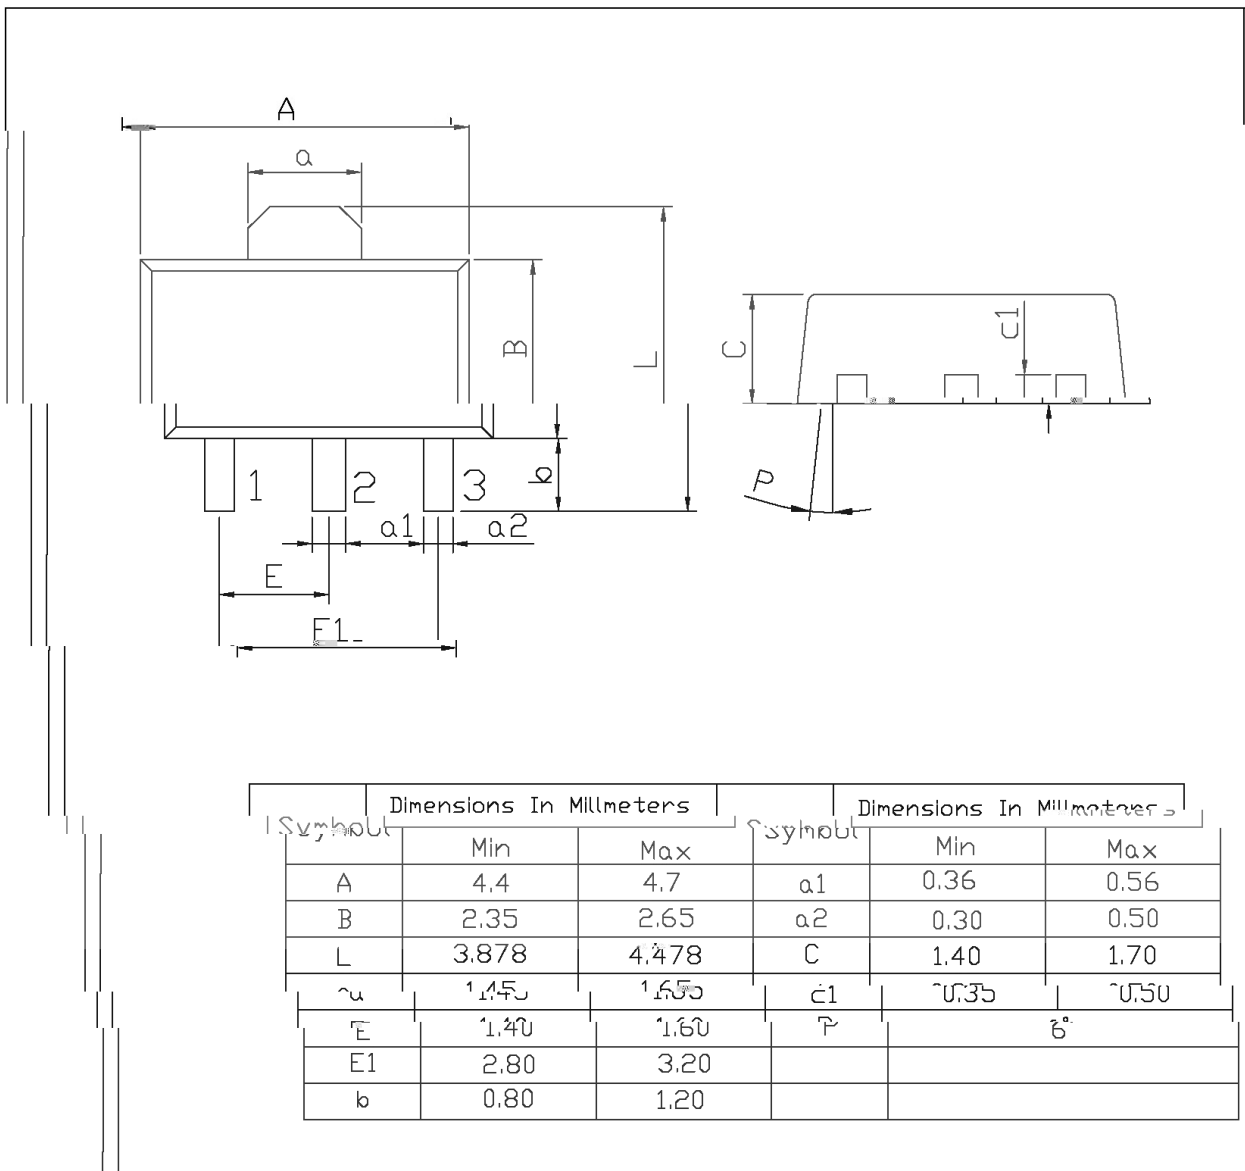

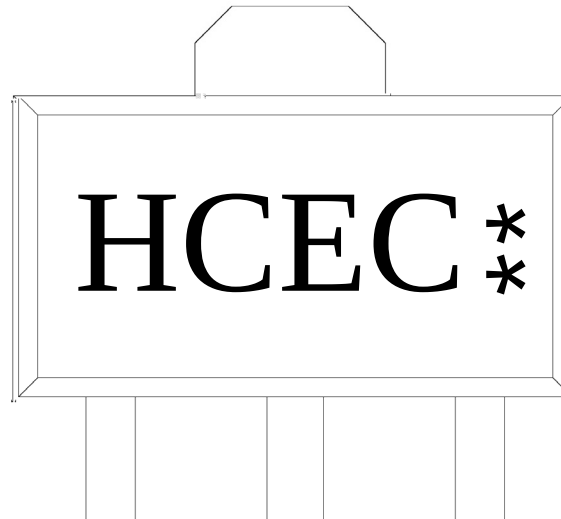

H

CEC


**

Note:

H: Company Code.

CEC: Product Type.

**: Lot No. Code, code change with Lot No.

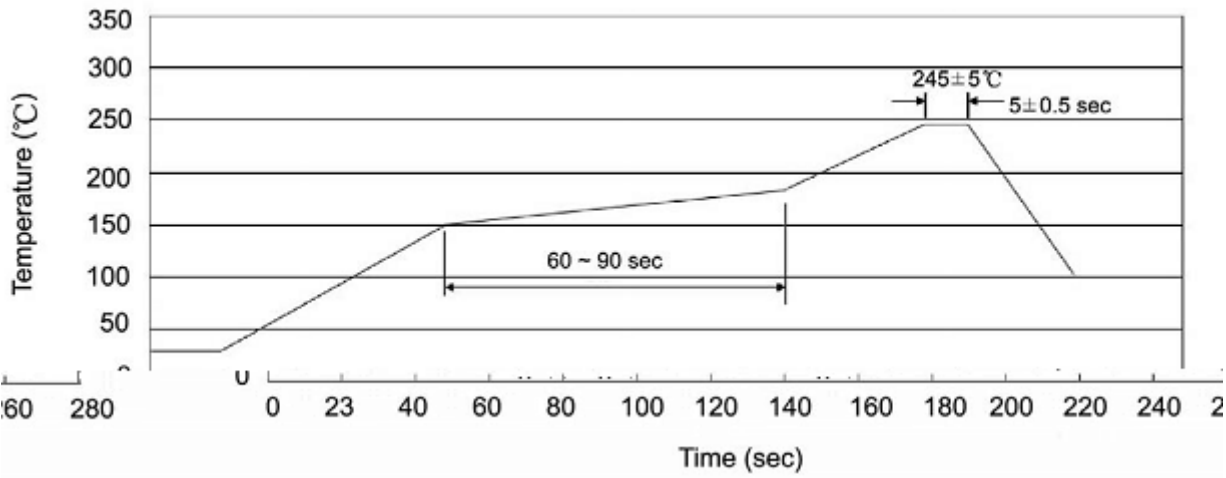

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7" ×12	180×120×180	385×257×392