


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

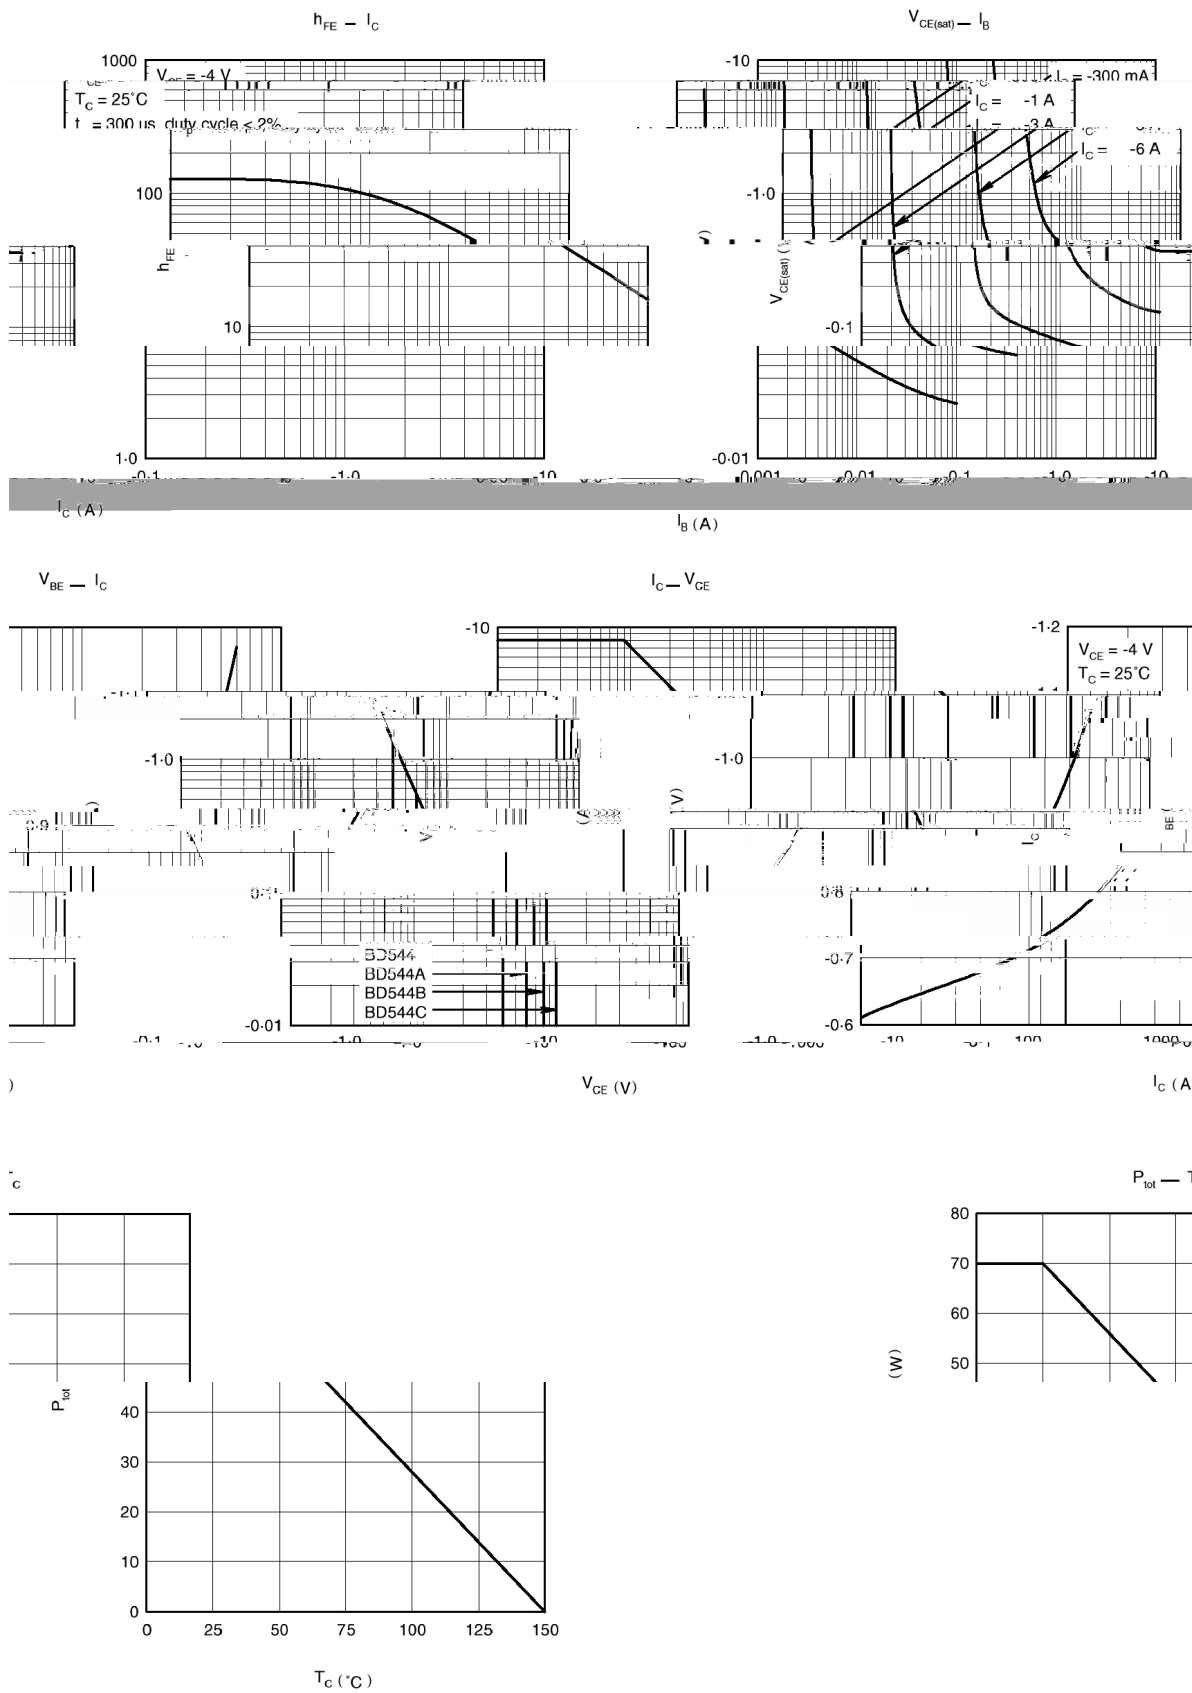


mm T0-220 单位:

Technical drawing of a mechanical part, labeled T0-220. The drawing includes a top view and a side view. The top view shows a rectangular part with a central circular feature and various dimensions labeled A, B1, a, a1, b1, C, C1, E, k, and C. The side view shows a cross-section with a 3-degree angle and dimensions B1, a1, b1, C1, E, and k. A table at the bottom provides dimensions in millimeters for various symbols.

Dimensions in millimeters			Dimensions in millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
B1	75.50	73.64	D	1.2	1.4
C	9.4	15.7	E	16.1	16.1
D	15.7	16.1	F	16.1	16.1
E	16.1	16.1	G	16.1	16.1
F	16.1	16.1	H	16.1	16.1
G	16.1	16.1	I	16.1	16.1
H	16.1	16.1	J	16.1	16.1
I	16.1	16.1	K	16.1	16.1
J	16.1	16.1	L	16.1	16.1
K	16.1	16.1	M	16.1	16.1
L	16.1	16.1	N	16.1	16.1
M	16.1	16.1	O	16.1	16.1
N	16.1	16.1	P	16.1	16.1
O	16.1	16.1	Q	16.1	16.1
P	16.1	16.1	R	16.1	16.1
Q	16.1	16.1	S	16.1	16.1
R	16.1	16.1	T	16.1	16.1
S	16.1	16.1	U	16.1	16.1
T	16.1	16.1	V	16.1	16.1
U	16.1	16.1	W	16.1	16.1
V	16.1	16.1	X	16.1	16.1
W	16.1	16.1	Y	16.1	16.1
X	16.1	16.1	Z	16.1	16.1
Y	16.1	16.1			
Z	16.1	16.1			

/ Marking Instructions

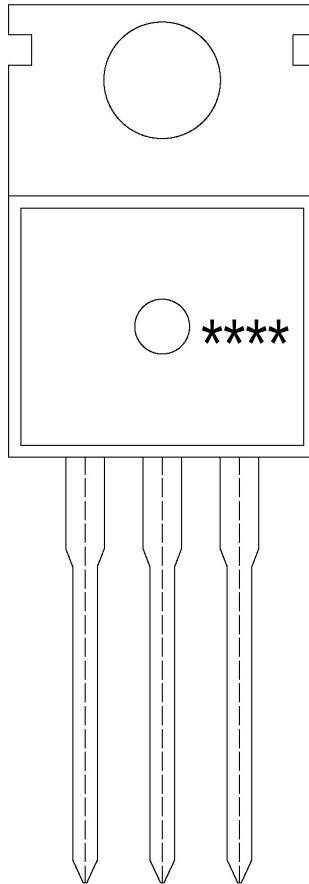

() / Temperature Profile for Dip Soldering(Pb-Free)

