




E	2016-5				
F	2020-4-27	1			
A	2022-3-29	all	BR Q 4R Q AEC-Q101 , Q 245±5°C 5±0.5sec 255±5°C 5± 0.5sec		



TO-252 NPN Silicon NPN transistor in a TO-252 Plastic Package.

$V_{CE(sat)}$, h_{FE} AEC-Q101
Low saturation voltage,excellent h_{FE} linearity and high h_{FE} , Qualified to AEC-Q101 Standards for High Reliability, HF Product.

3 , ,
Output stage of 3 watts audio amplifier, voltage regulator, DC-DC converter and relay driver, Meet the stringent requirements of automotive applications.






PIN1 Base PIN 2,4 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	R	Q	P	E
h_{FE} Range	60~120	100~200	160~320	200~400



Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	3.0	A
Collector Power Dissipation	P_C	1.0	W
	$P_{C(TC=25^{\circ}C)}$	10	W
Junction Temperature	T_J	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55~150	$^{\circ}C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=30V$ $I_E=0$			1.0	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=3.0V$ $I_C=0$			1.0	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=2.0V$ $I_C=1.0A$	60	160	400	
	$h_{FE(2)}$	$V_{CE}=2.0V$ $I_C=20mA$	30	150		
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2.0A$ $I_B=0.2A$		0.3	0.5	V

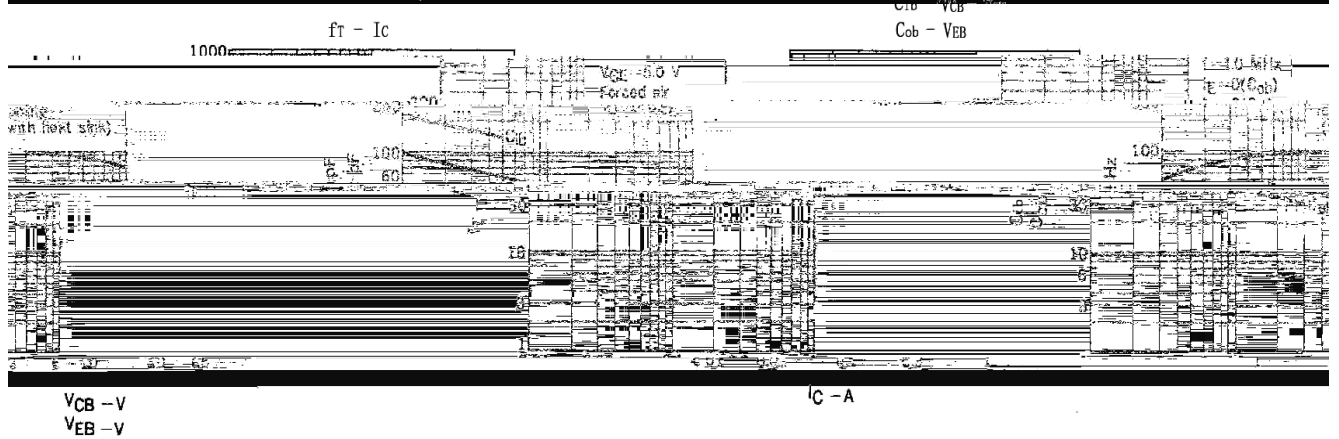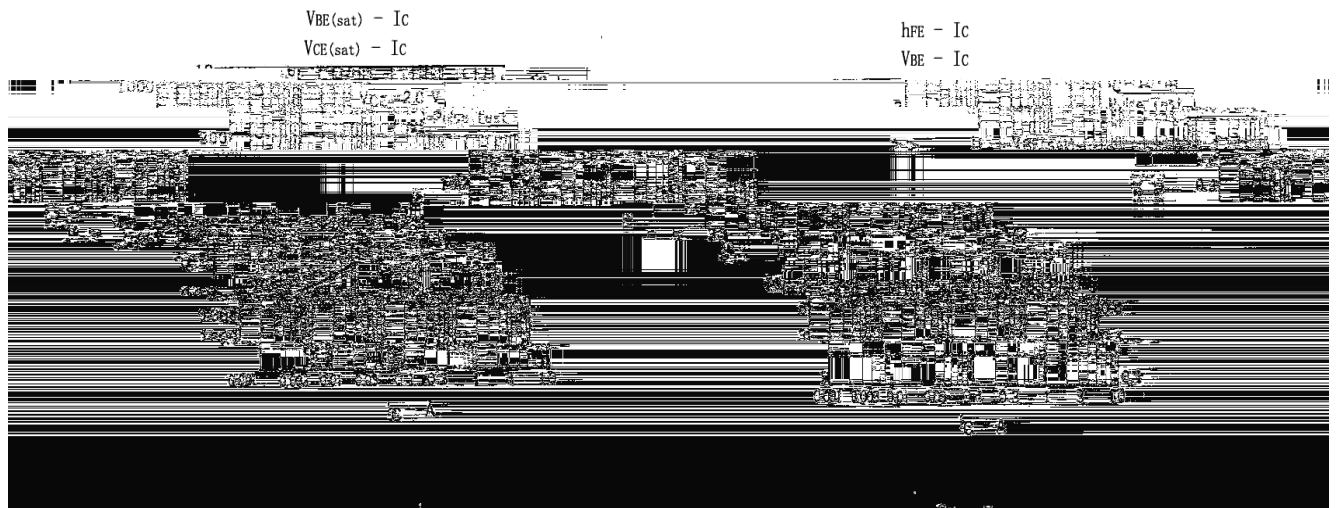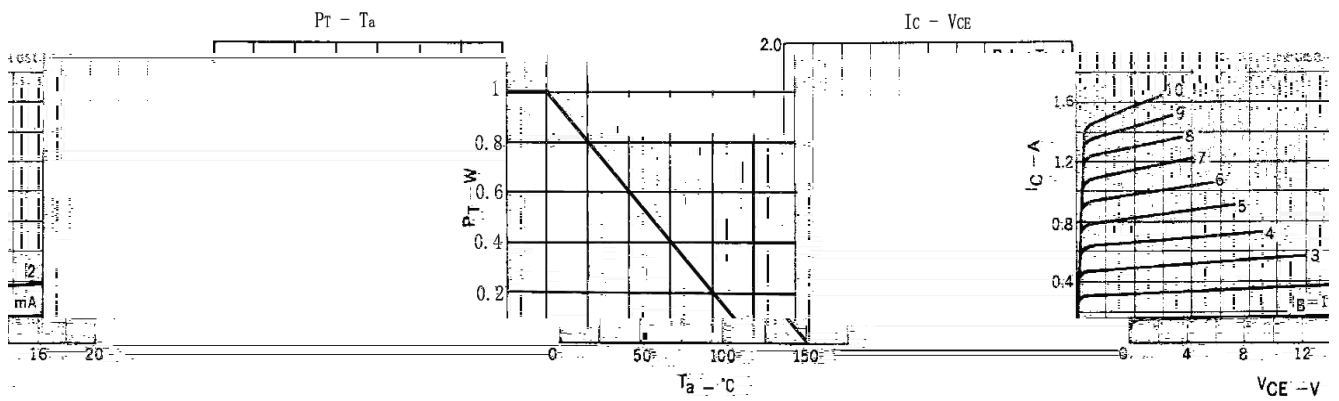

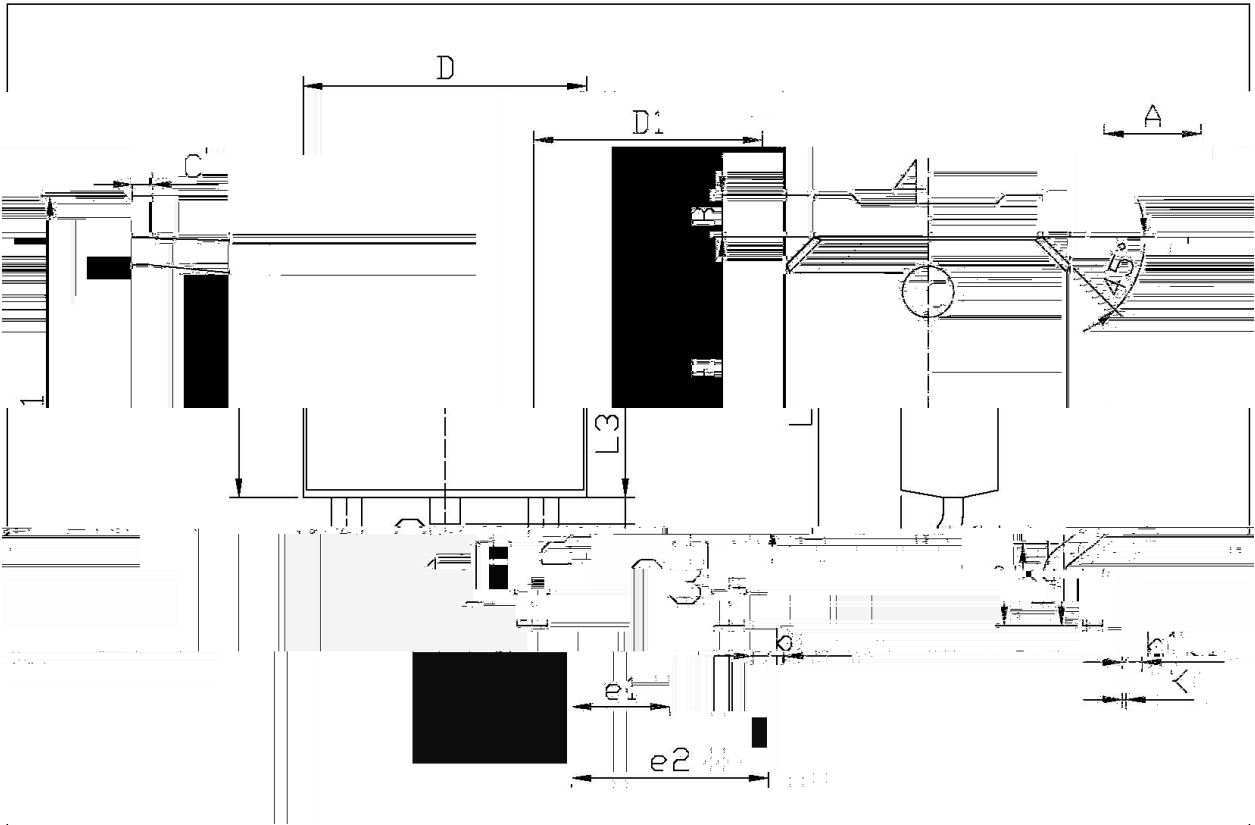


单位: mm

Dimensions in millimeters				Dimensions in millimeters			
Symbol	Min.	Max.		Symbol	Min.	Max.	
A	5.95	6.25		A	5.95	6.25	
C	2.24	2.34		P	6.95		
e1	4.43	4.73		R	0.70		
e2	9.85	10.35		S	0.45		
L1	1.70	2.05		T	0.45	0.60	0.80
L3	0.60	0.90		D	6.45	6.75	
K	0.00	0.10		D1	5.10	5.50	

1-252

TT

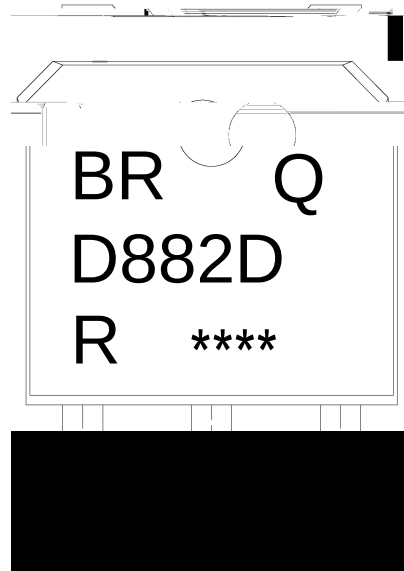

BR

Q

D882D

R: h_{FE}

Note:

BR: Company Code

Q: Automobile halogen-free product Code


D882D: Product Type

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No



Temperature Profile for IR Reflow Soldering(Pb-Free)

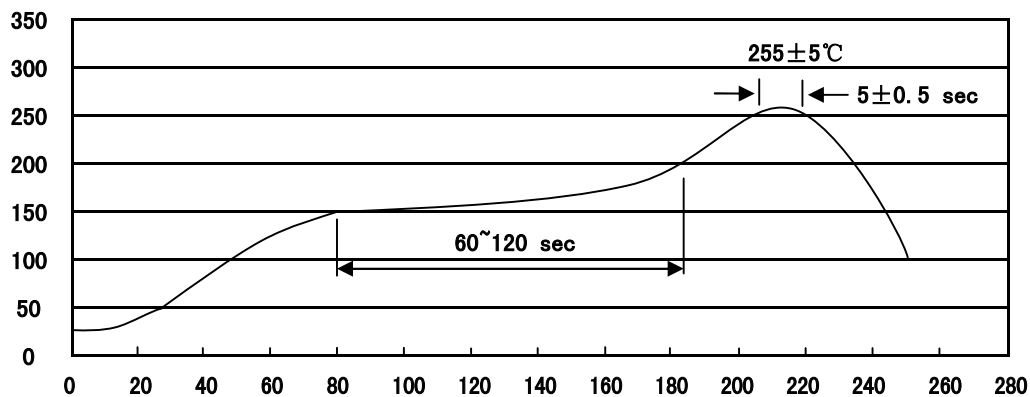

Note:

1. Preheating: 150~200 , Time: 60~120sec.
2. Peak Temp.: 255±5 , Duration: 5±0.5sec.
3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.: 260±5°C

Time: 10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180