



1

1


DC/DC




	°C		
	°C		
	°C		

[illegible]


$I_D - V_{DS}$

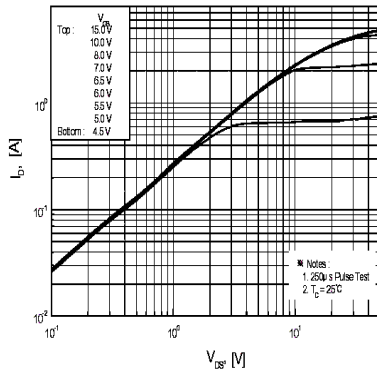


$I_D - V_{GS}$

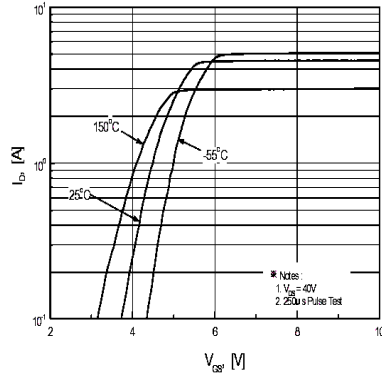


$R_{DS(on)} - I_D$

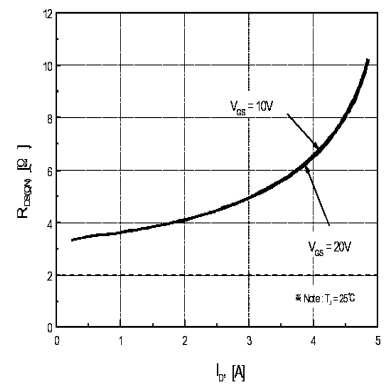


$C_{iss}, C_{oss}, C_{rss} - V_{DS}$

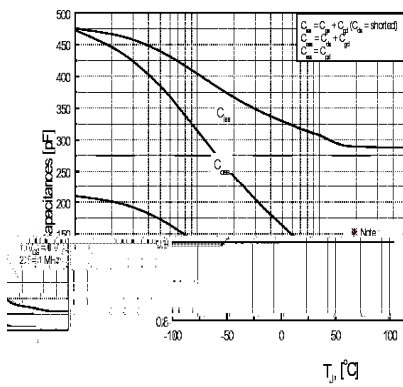




$BV_{DSS} - T_j$

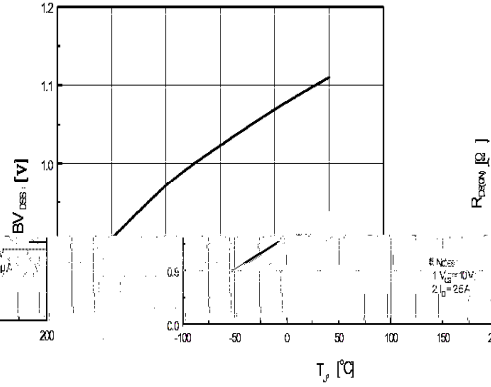


$R_{DS(on)} - T_j$

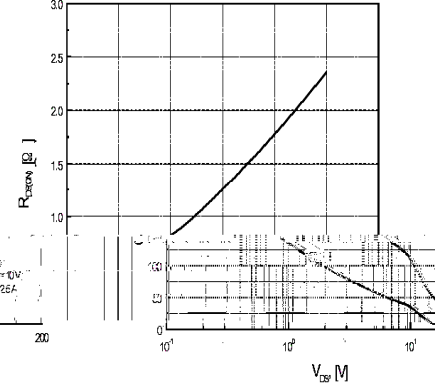


$I_D - V_{DS}$

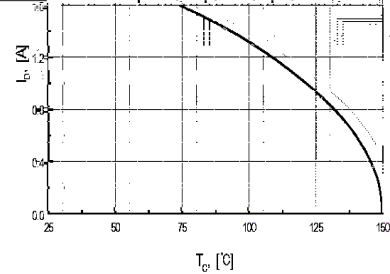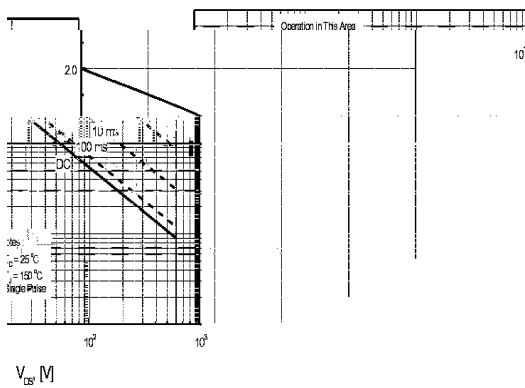

$I_D - T_c$




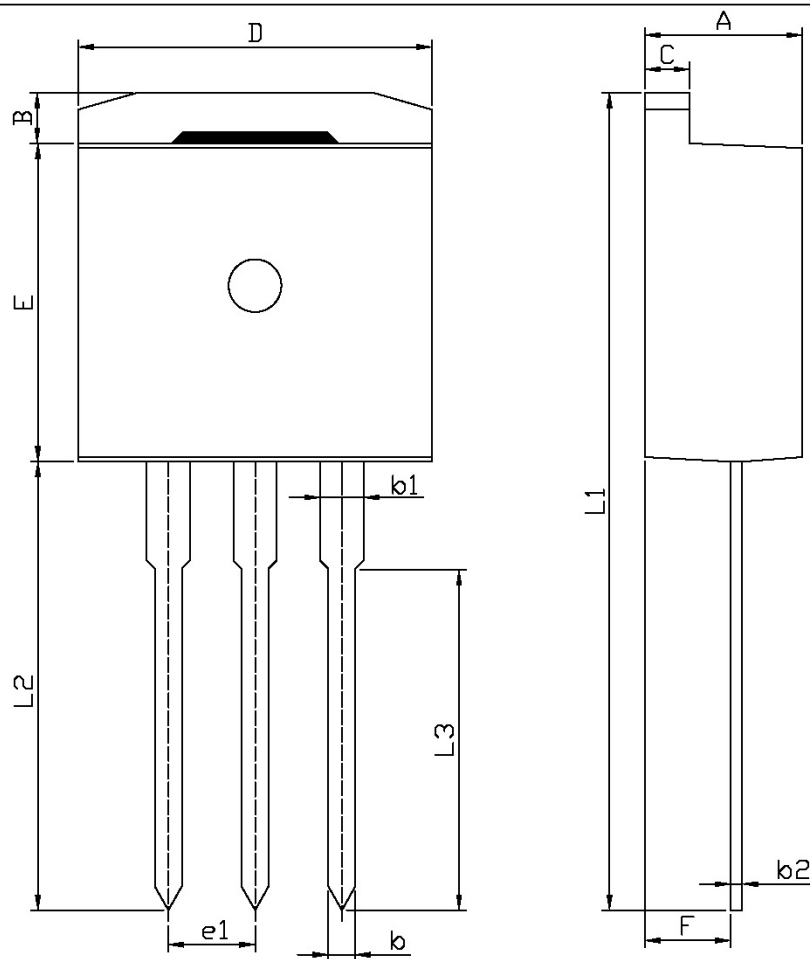


单位: mm

Symbol	Dimensions In. Millimeters		Symbol	Dimensions In. Millimeters	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	F	2.20	2.60
b1	1.27		L1	22.60	23.60
b2	0.40	0.60	L2	12.60	13.60
C	1.20	1.40	L3	9.60	10.60
D	9.80	10.20			

T0-262

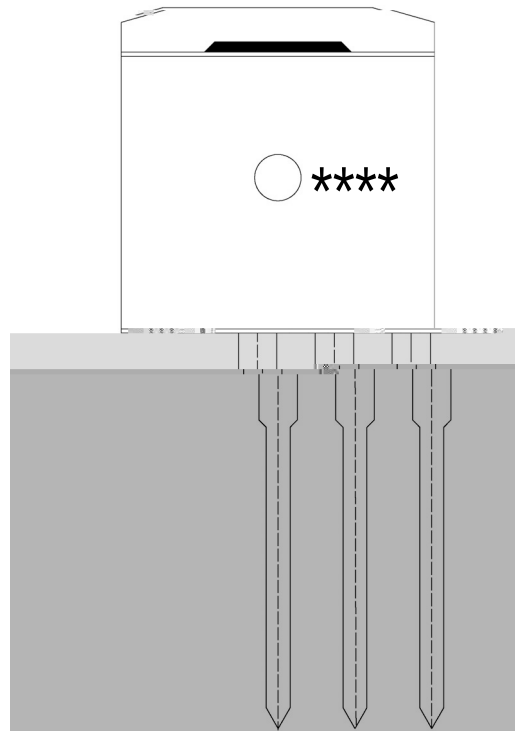

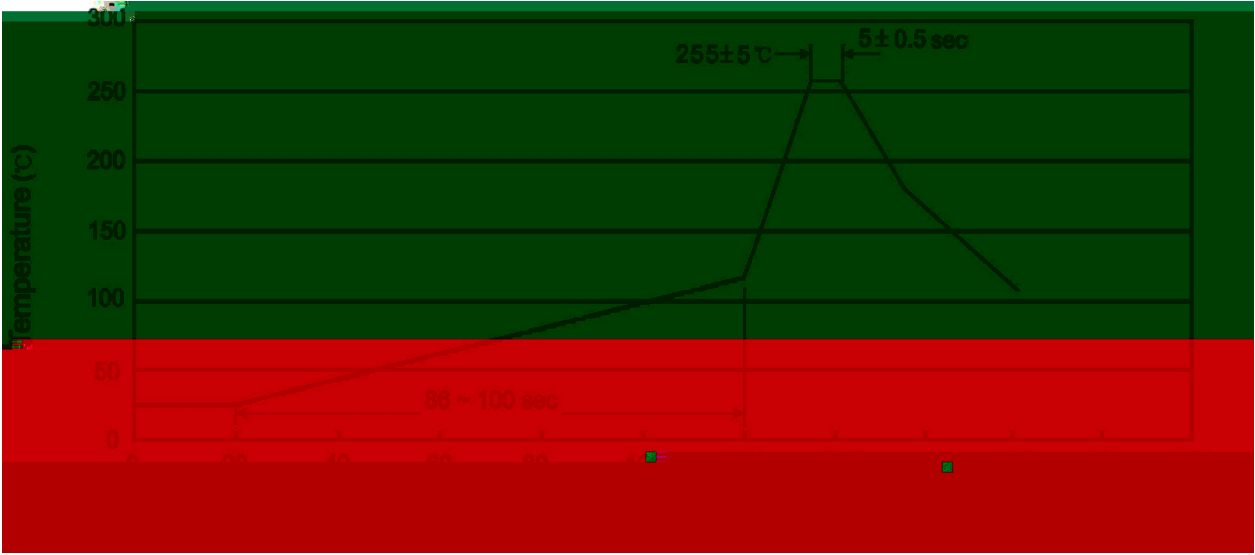

±

±

±

±

±

±

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-262	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180