

/ Descriptions

N-Channel MOSFET in a TOLL-8L Plastic Package.


/ Features

$\leq$ Ω Ω


$\leq$ Ω Ω

/ Applications

/ Equivalent Circuit



/ Pinning

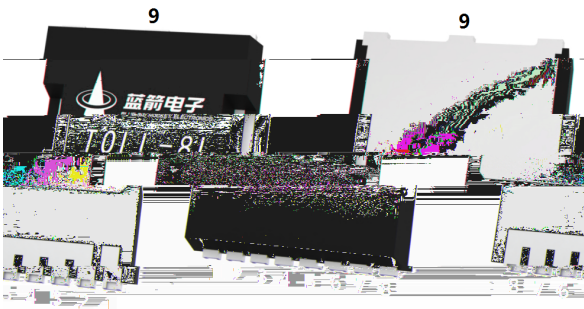

/ Marking




	θ		/W
	θ		

$$\leq \mu \leq \leq$$




						Ω

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

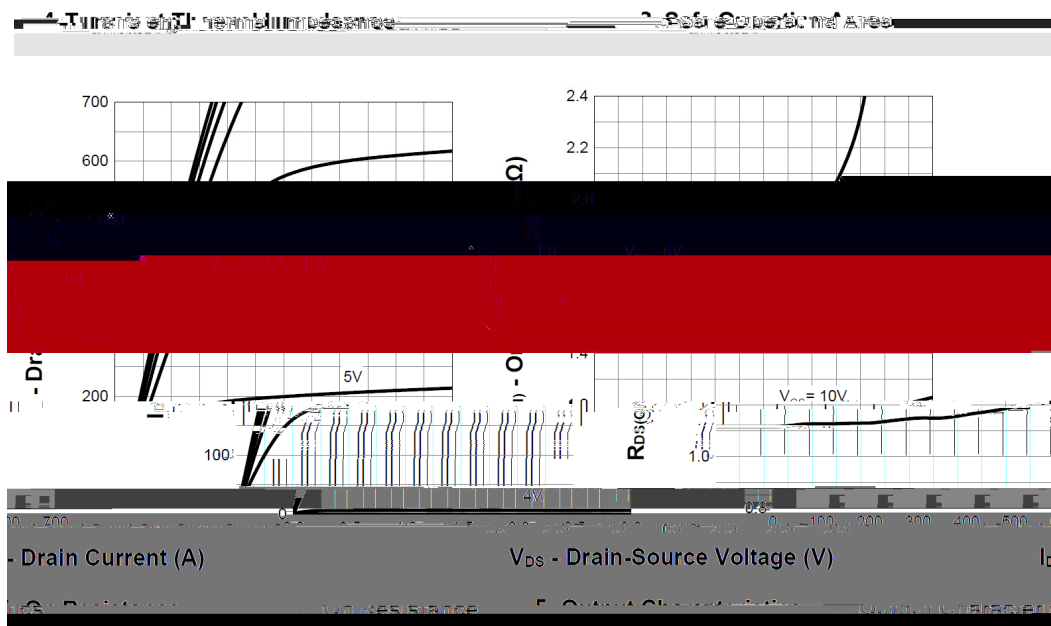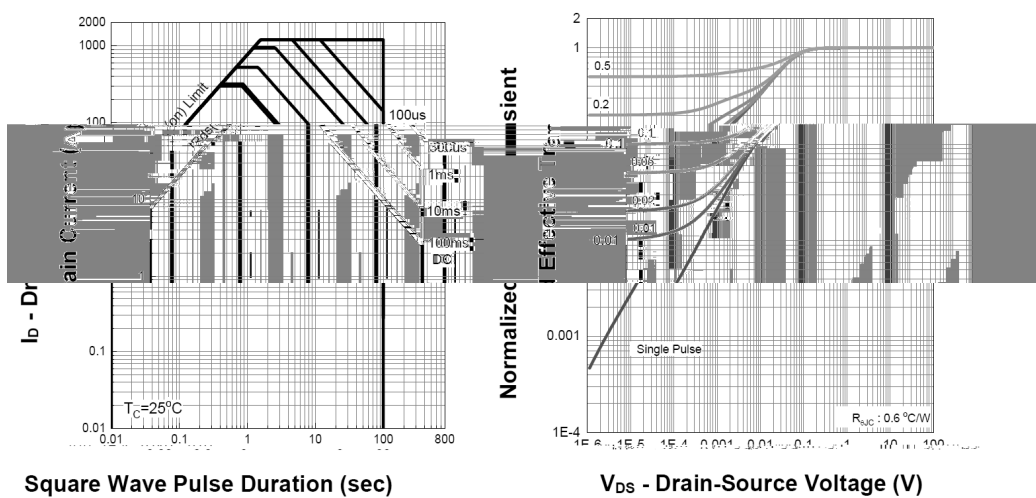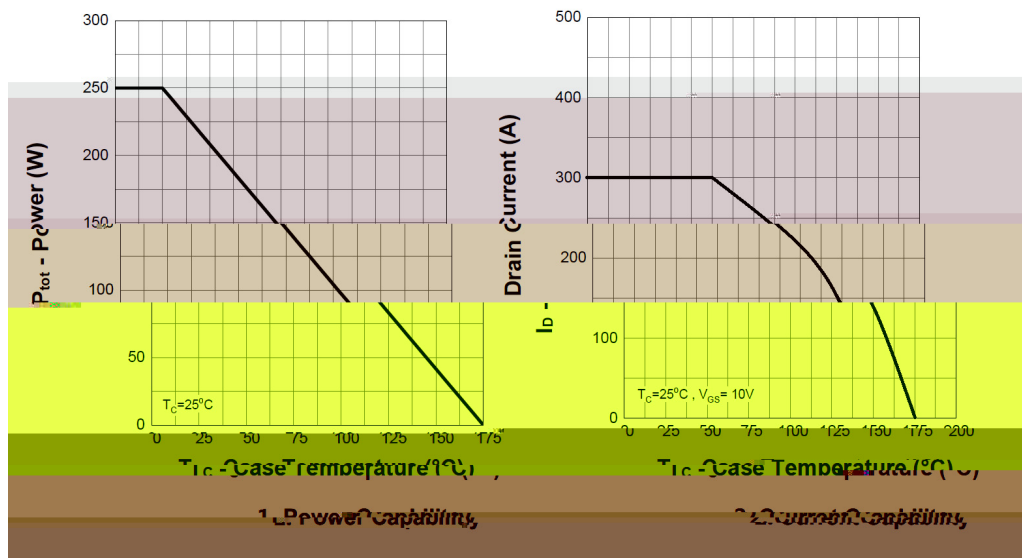

/ Electrical Characteristic Curve

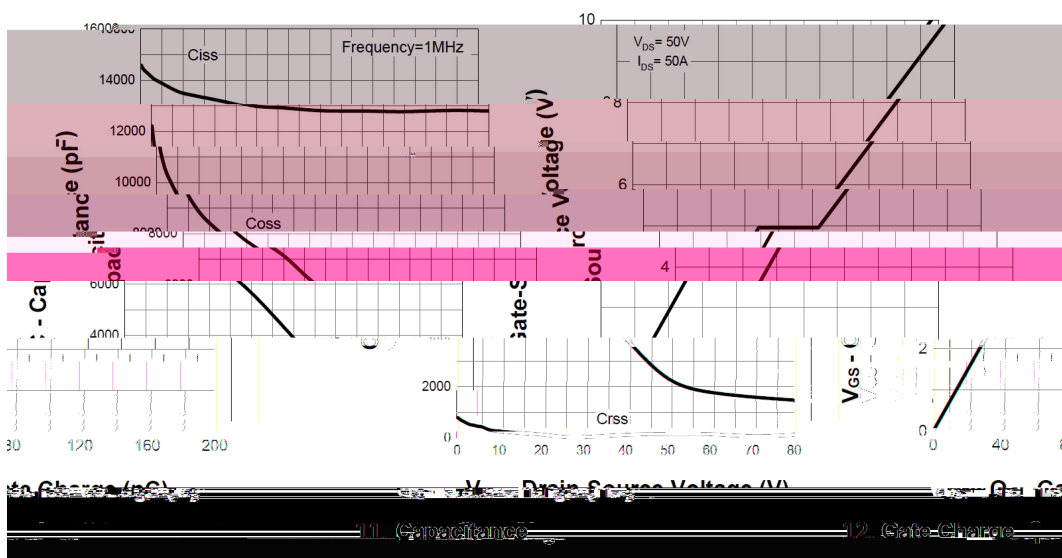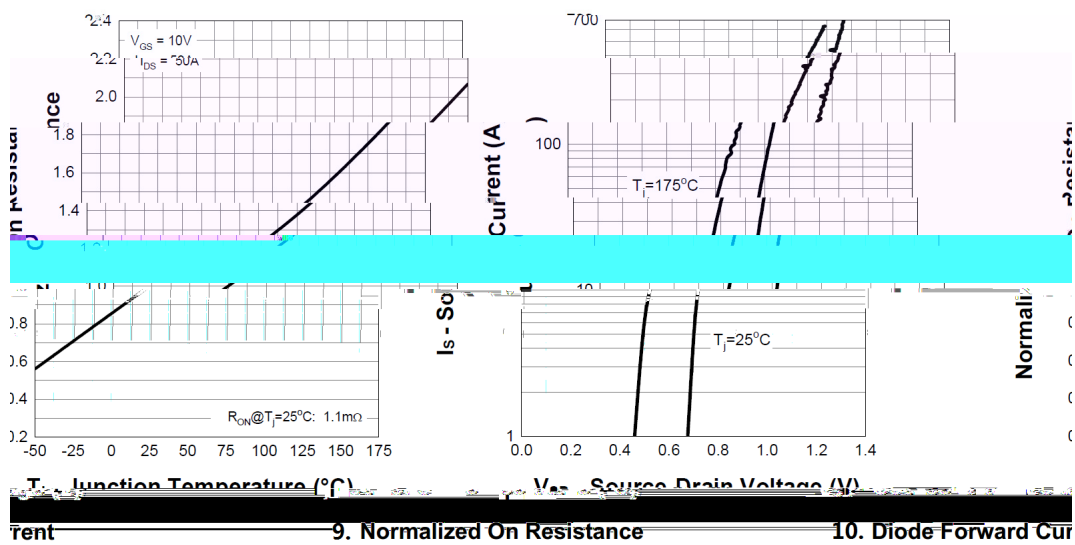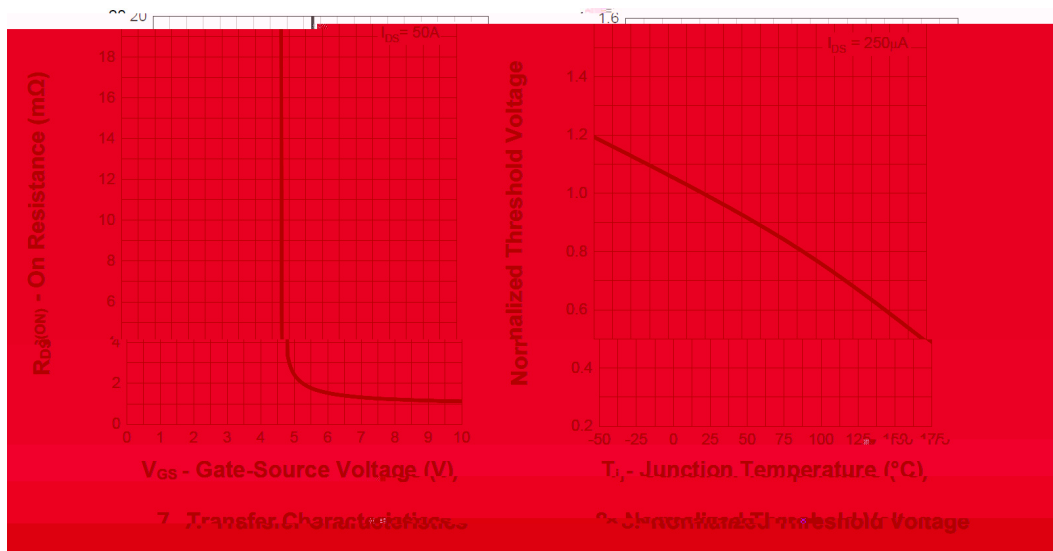


/ Package Dimensions

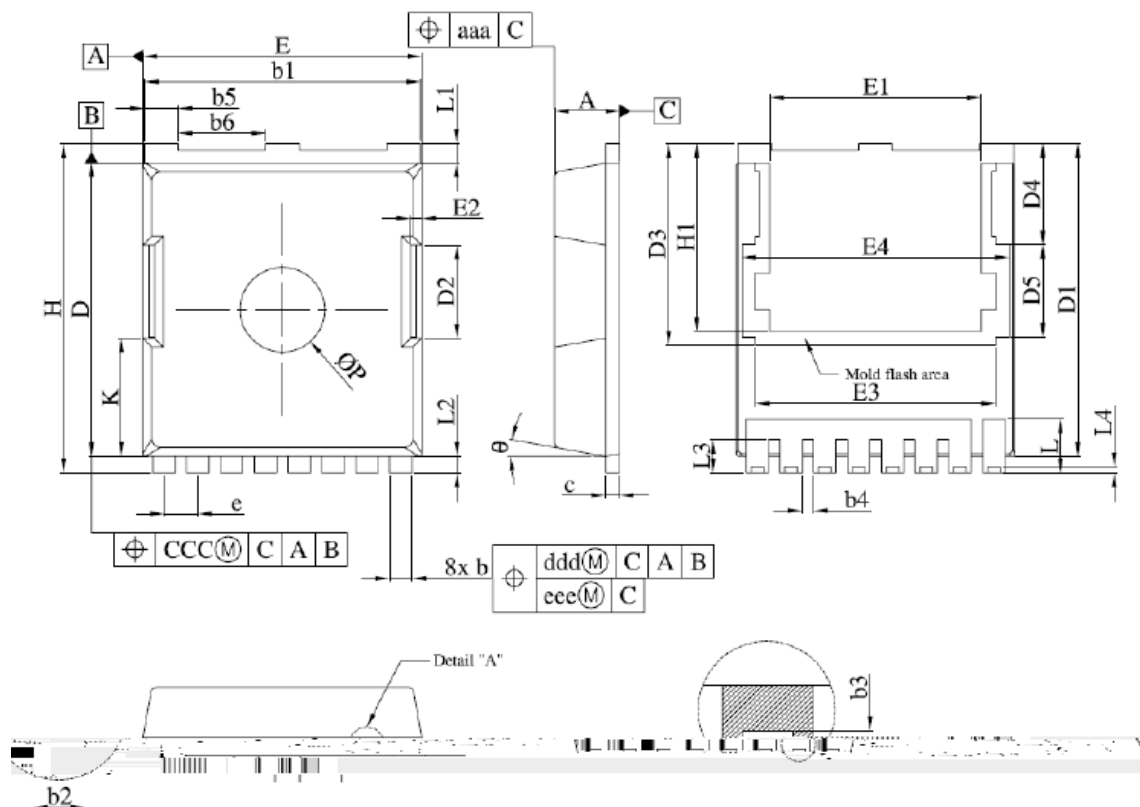


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	MIN.	MAX.		MIN.	MAX.
			θ		

/ Marking Instructions

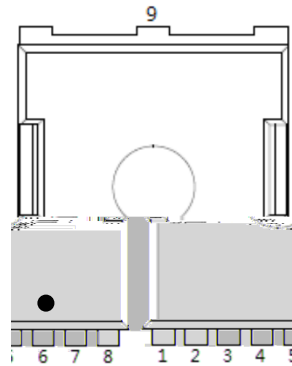

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

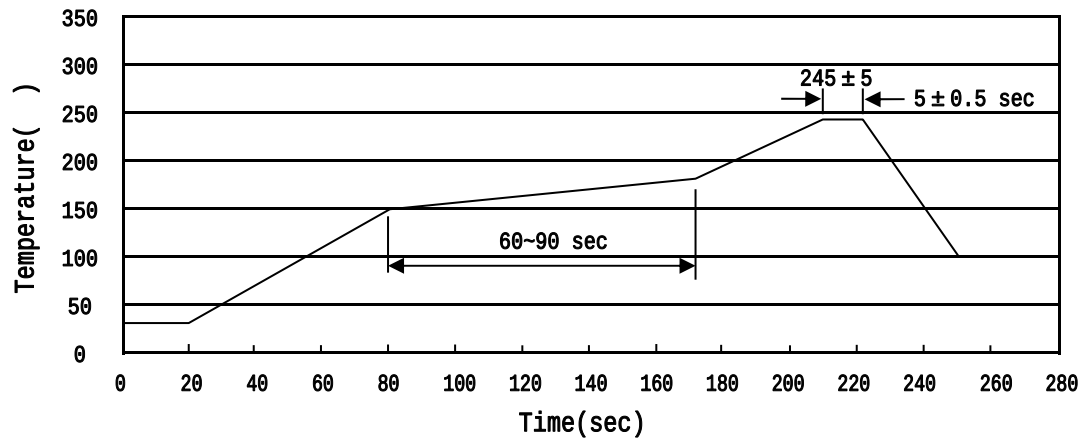 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	; > ß fH					; > ß p .		
	/	/	/	/	/			

/ Notices