

$$\vdots \qquad \qquad \qquad \curvearrowright \qquad \curvearrowright \qquad \curvearrowright \qquad \curvearrowright \qquad \curvearrowright \qquad \curvearrowright \qquad \vdots$$

1 8

/ Absolute Maximum Ratings(T_C=25)

		℃		
			±	
		θ		
		θ		


/ Electrical Characteristics(T_a=25)

					±	



		Ω Ω				

μ


/ Electrical Characteristic Curve

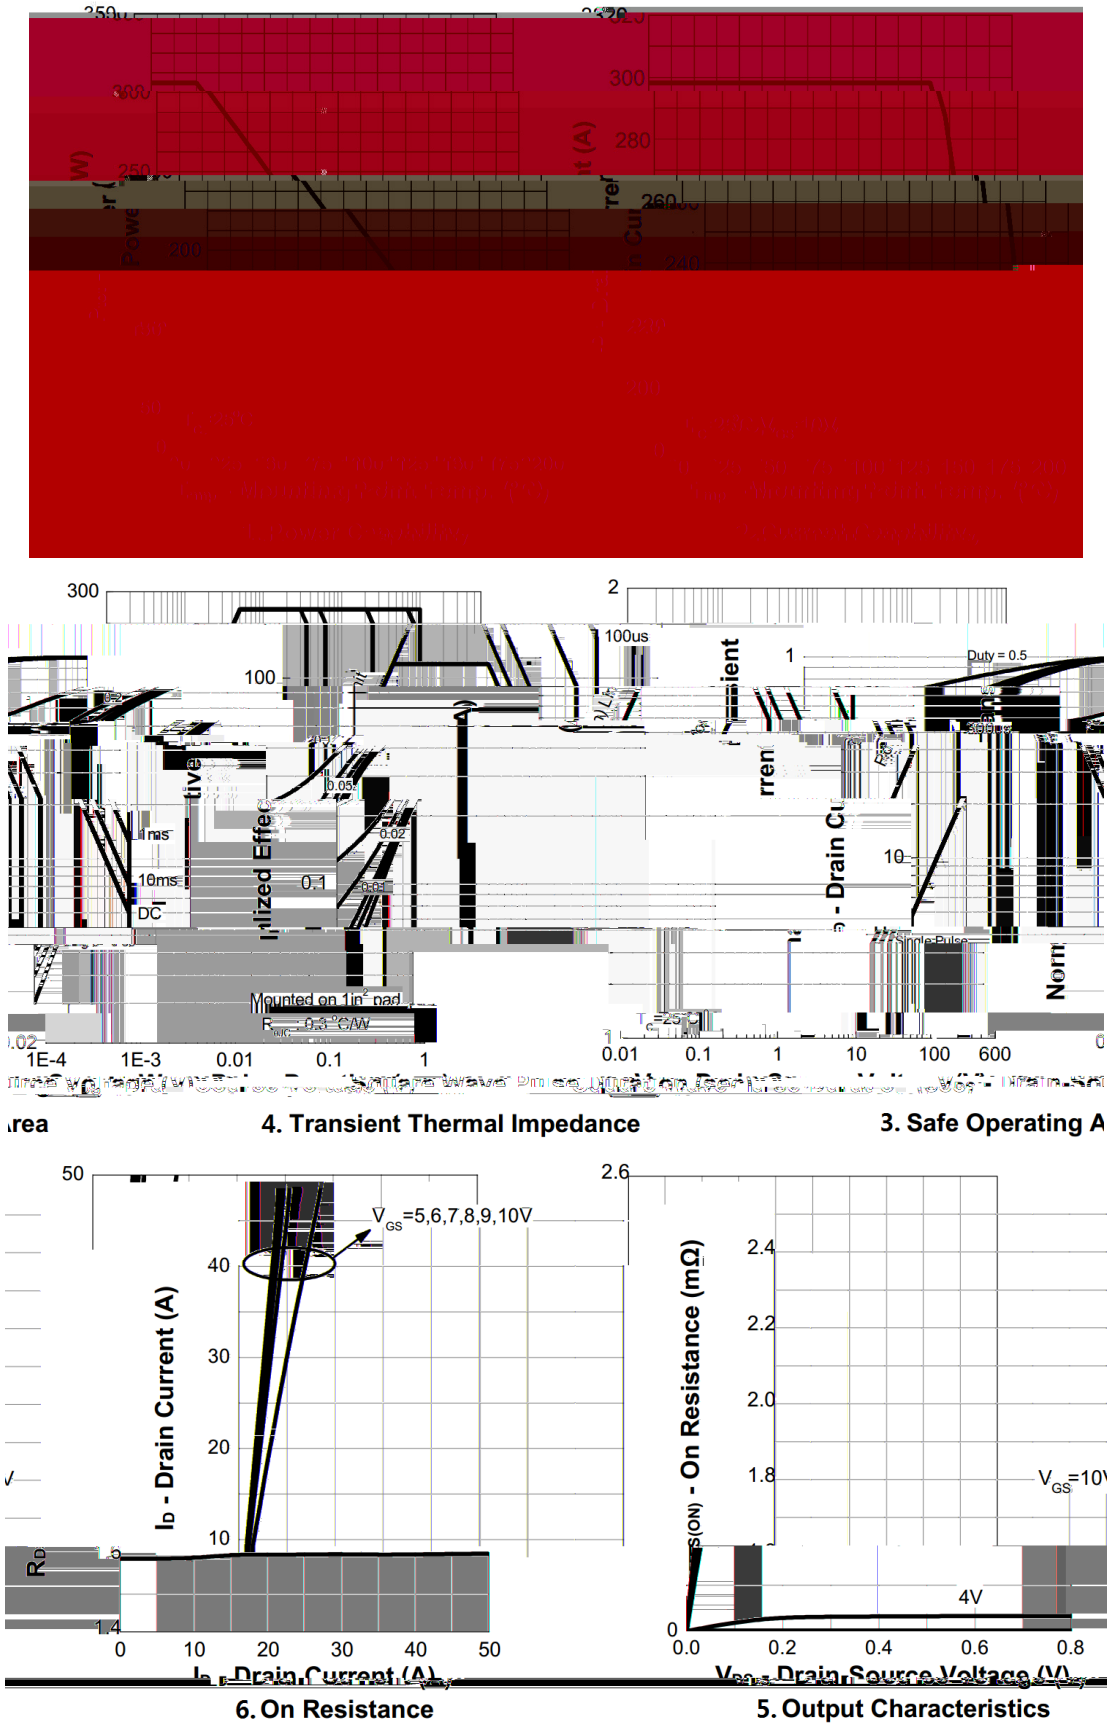

/ Electrical Characteristic Curve

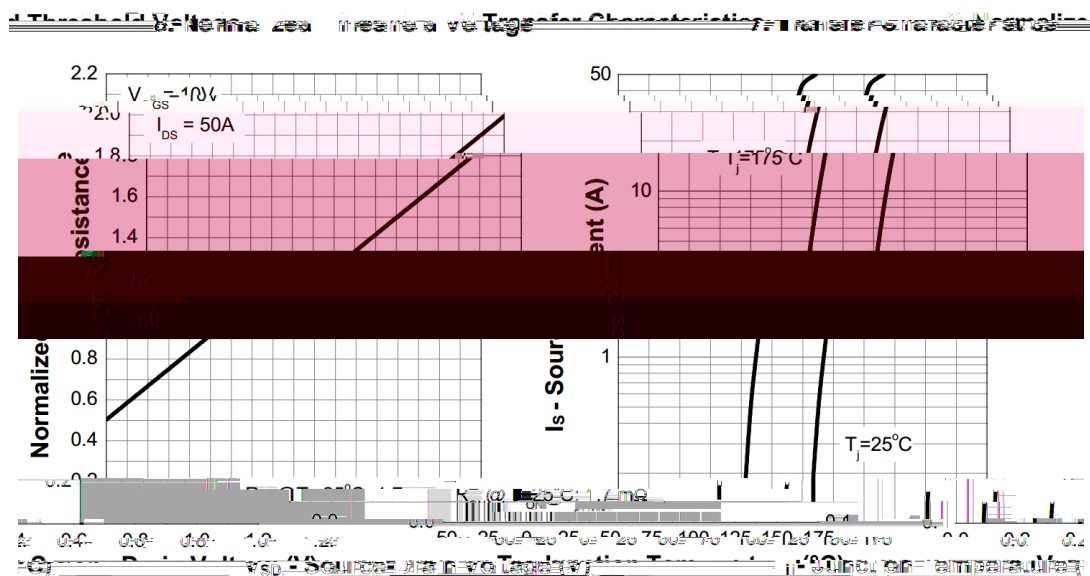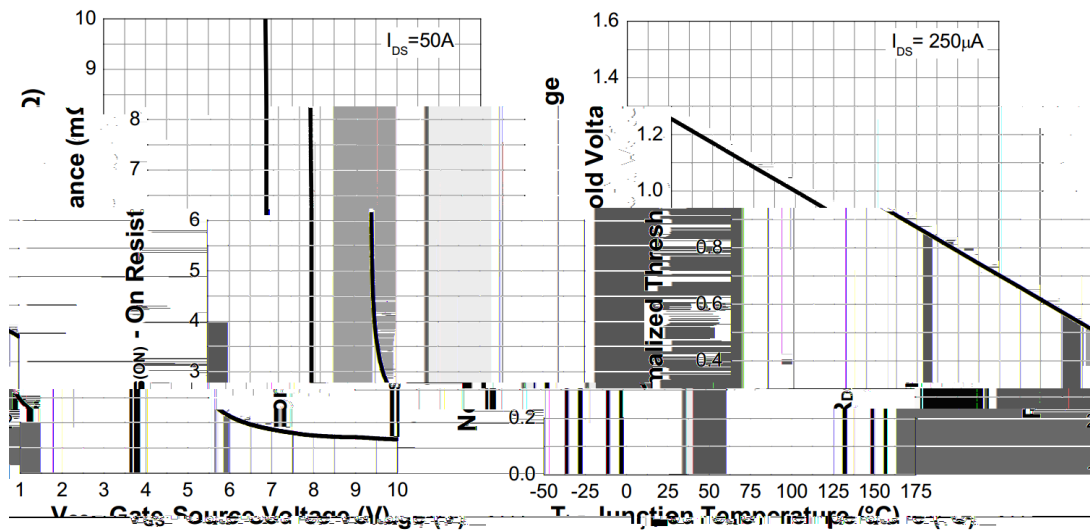


resistance 10. Diode Forward Current 9. Normalized On-Resistance

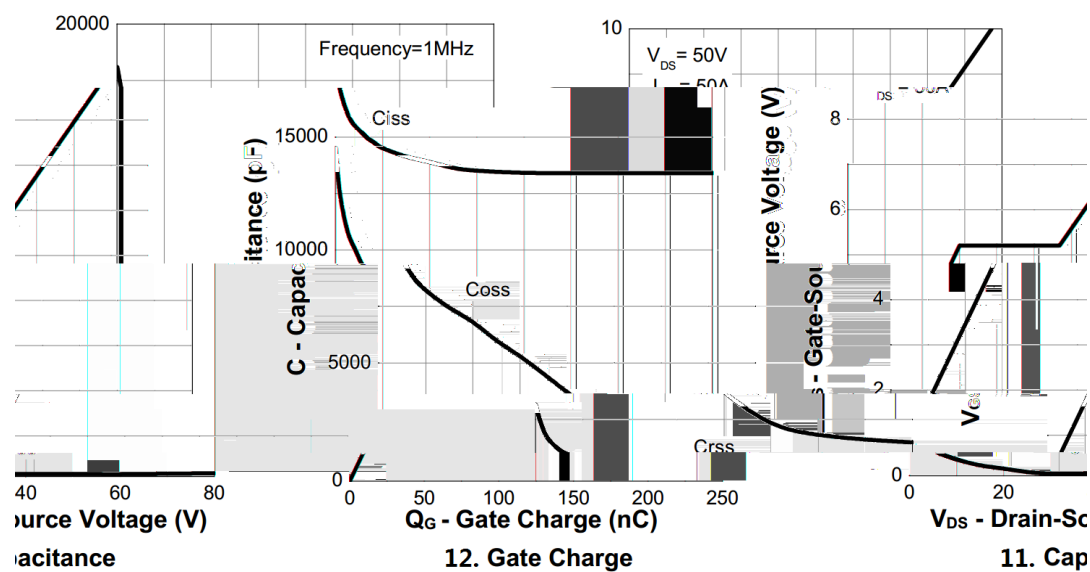


Source Voltage (V) 12. Gate Charge 11. Capacitance

/ Package Dimensions

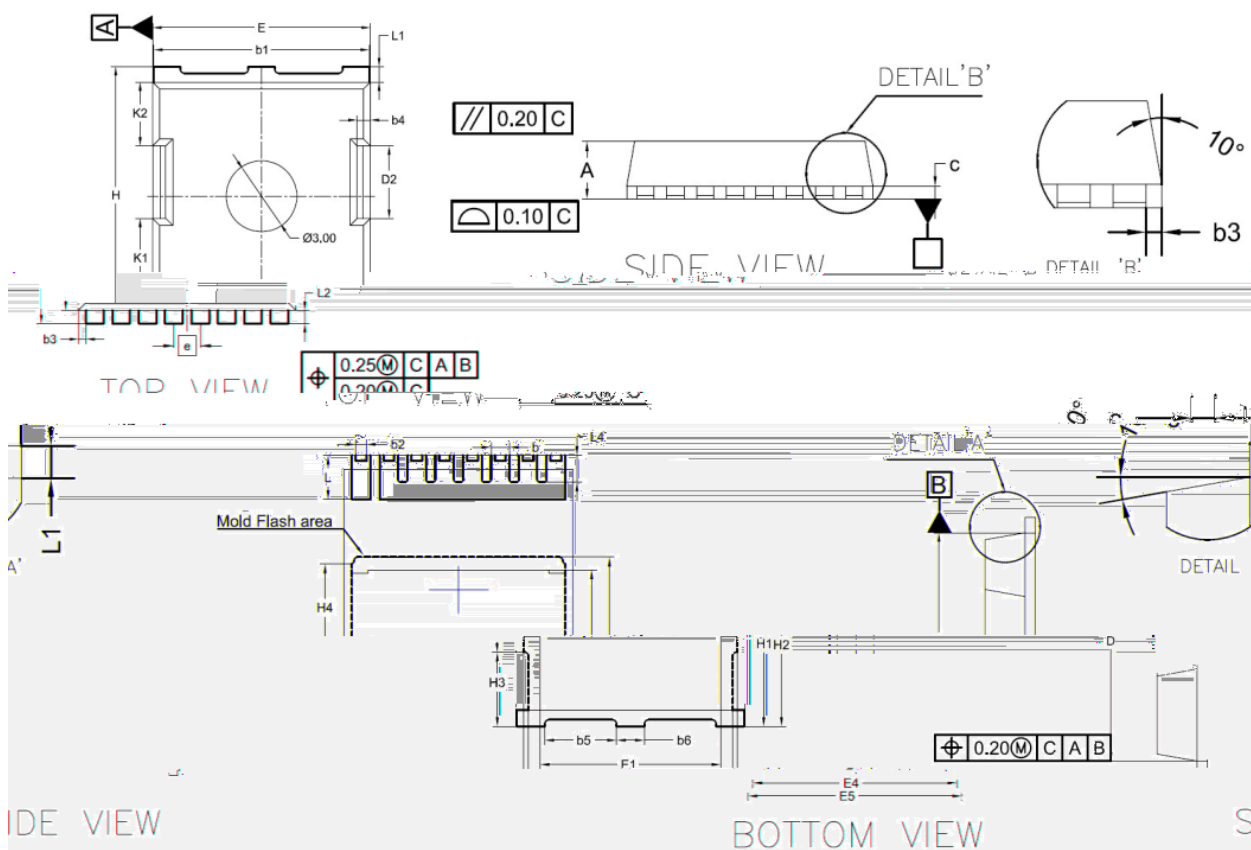


Symbol	Dimensions In Millimeters			Symbol	Dimensions In Millimeters		
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.

/ Marking Instructions

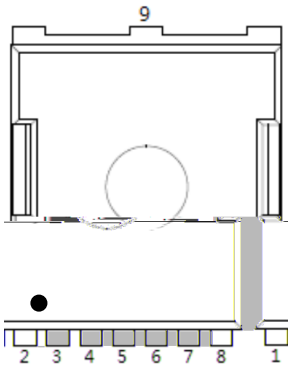

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

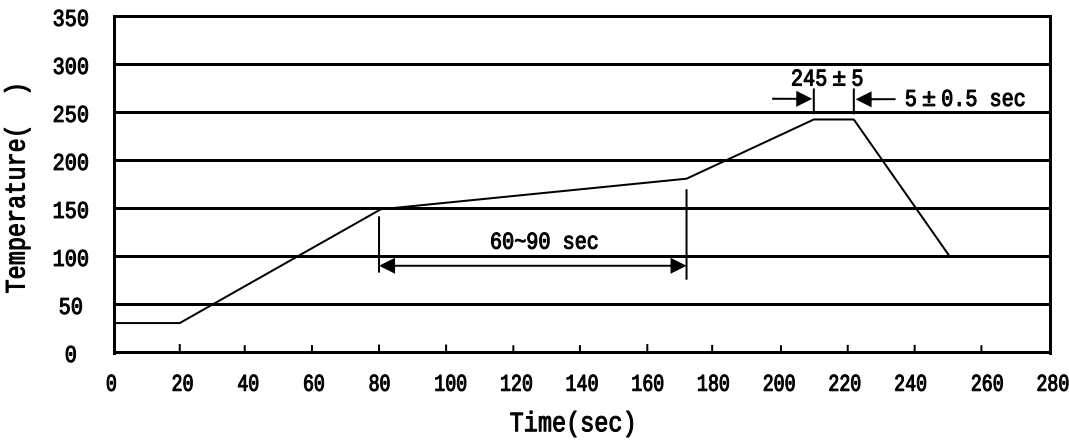

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box

/ Notices