/ Descriptions

/ Features

≤ Ω Ω

≤ Ω Ω

/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning

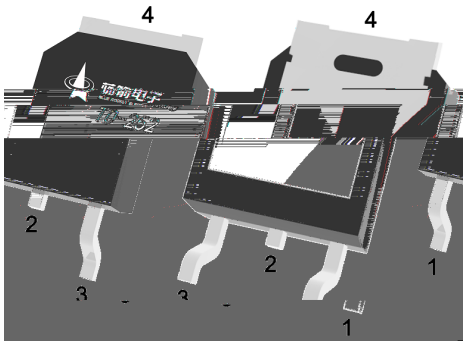

/ Marking

		Ņ		
			¤	
		Ņ		
		θ		
		θ		

					±	
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

		ß ß				

/ Electrical Characteristic Curve

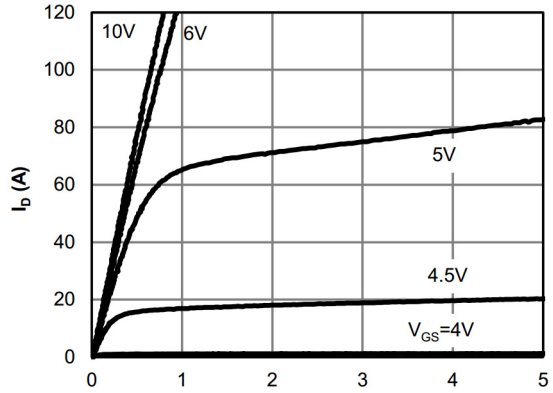

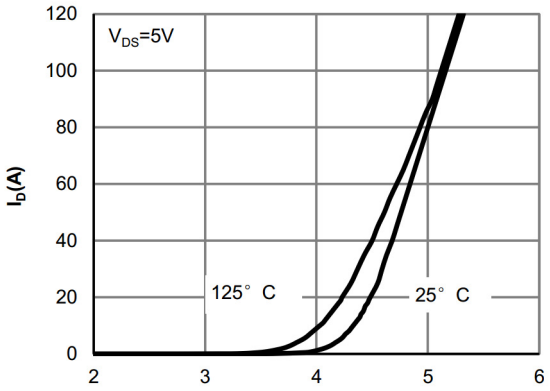

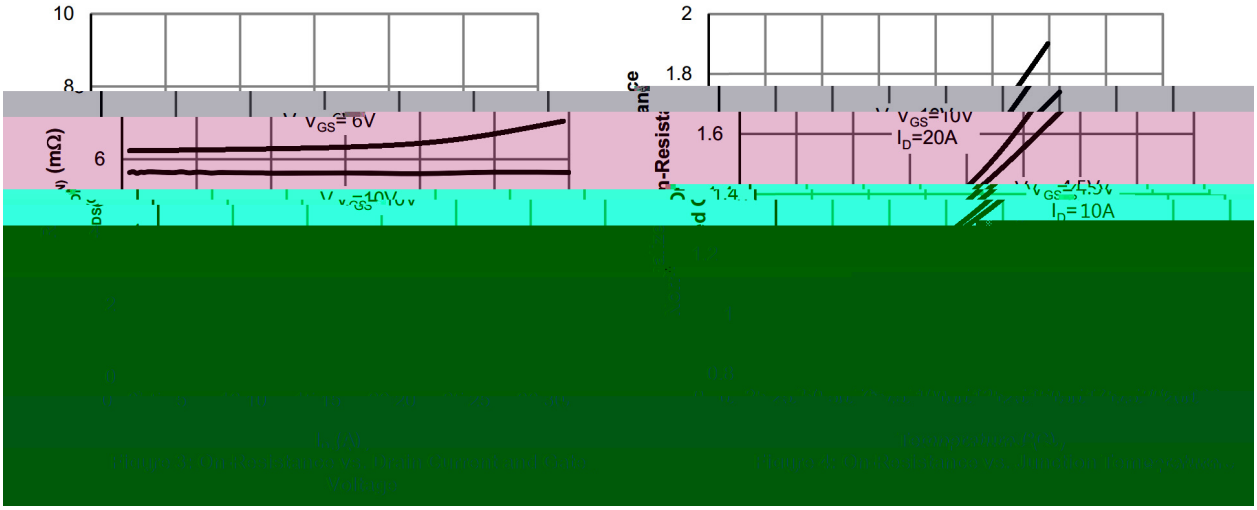

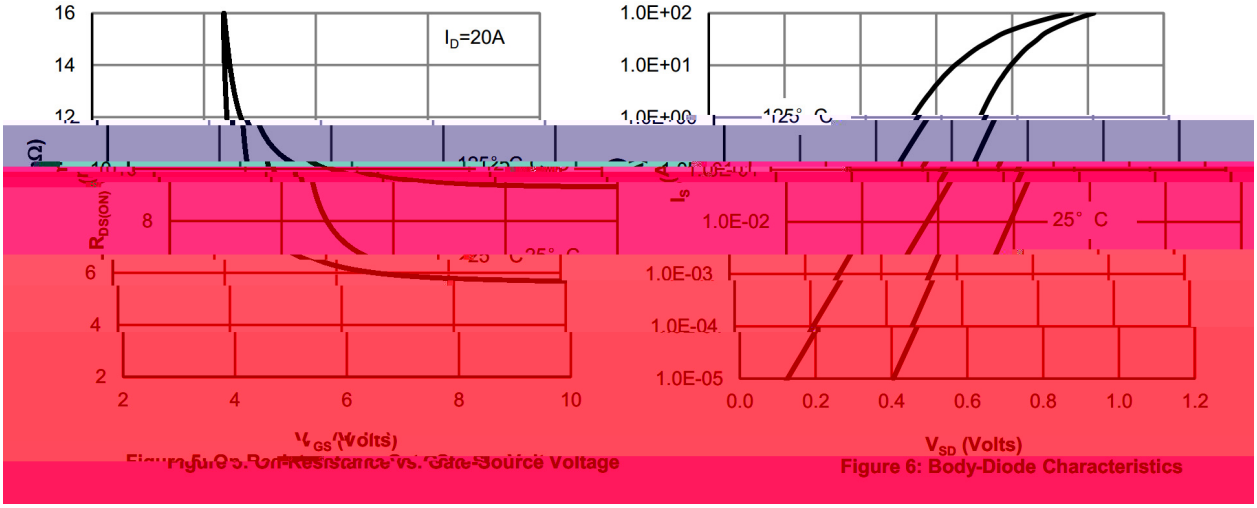

Figure 6: Body-Diode Characteristics

/ Electrical Characteristic Curve

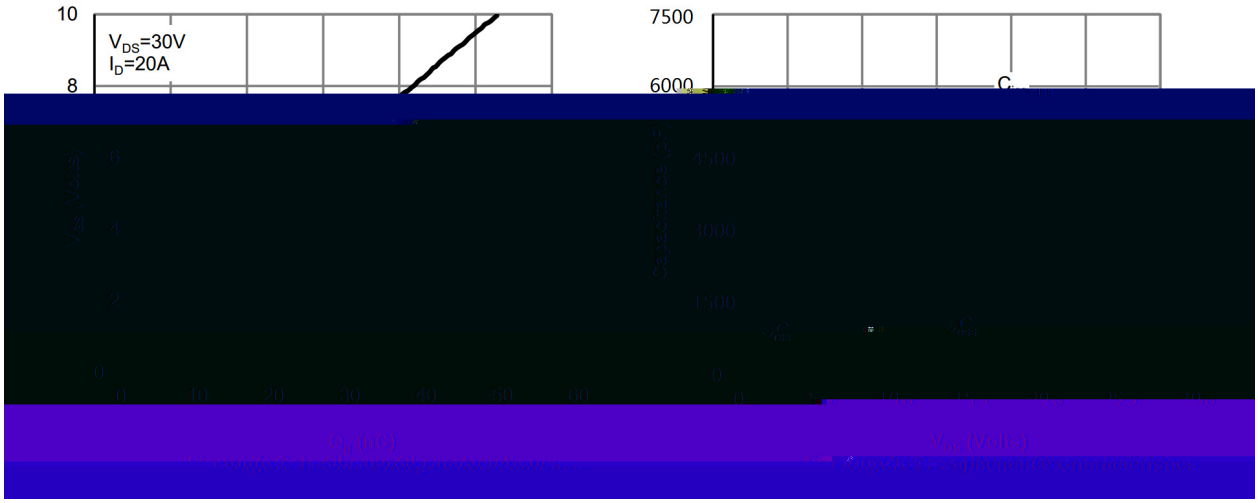

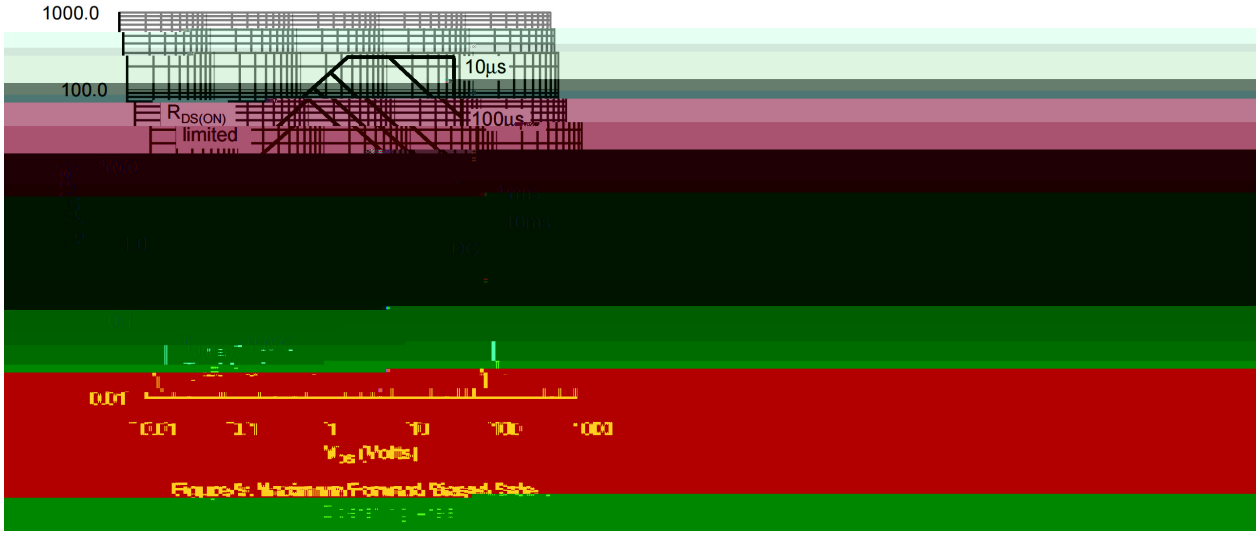

Figure9: Maximum Forward Biased Safe

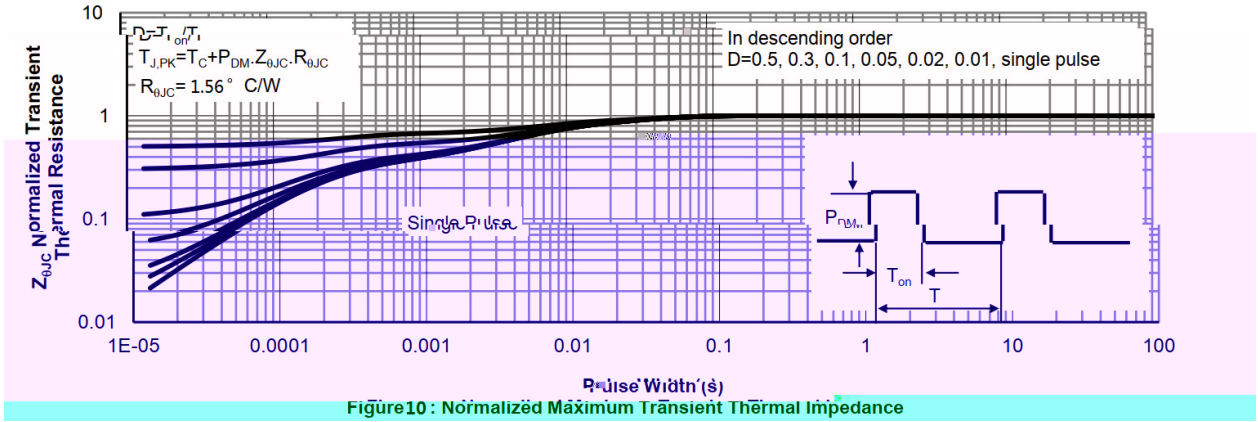

Figure10 : Normalized Maximum Transient Thermal Impedance

/ Marking Instructions

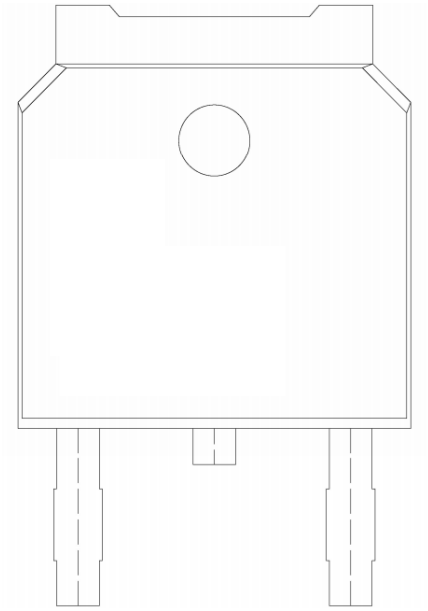

****

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.