


x

Ω
 Ω



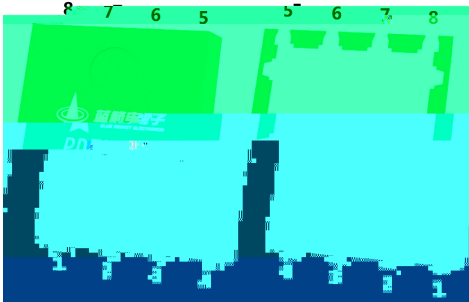




			±	
	≤	θ		
		θ		



		μ				
					±	
		μ				
						Ω
						Ω

Ω

Ω

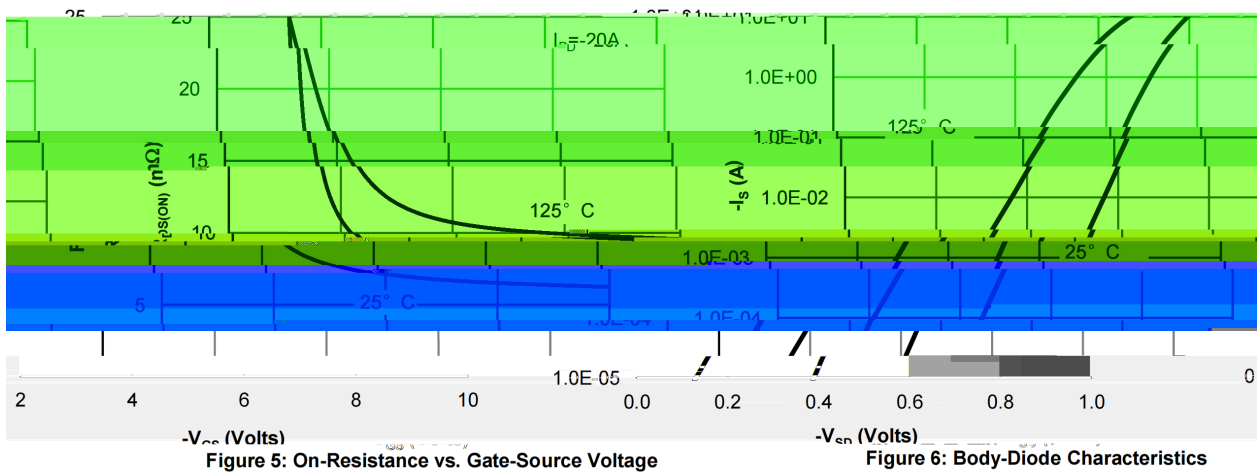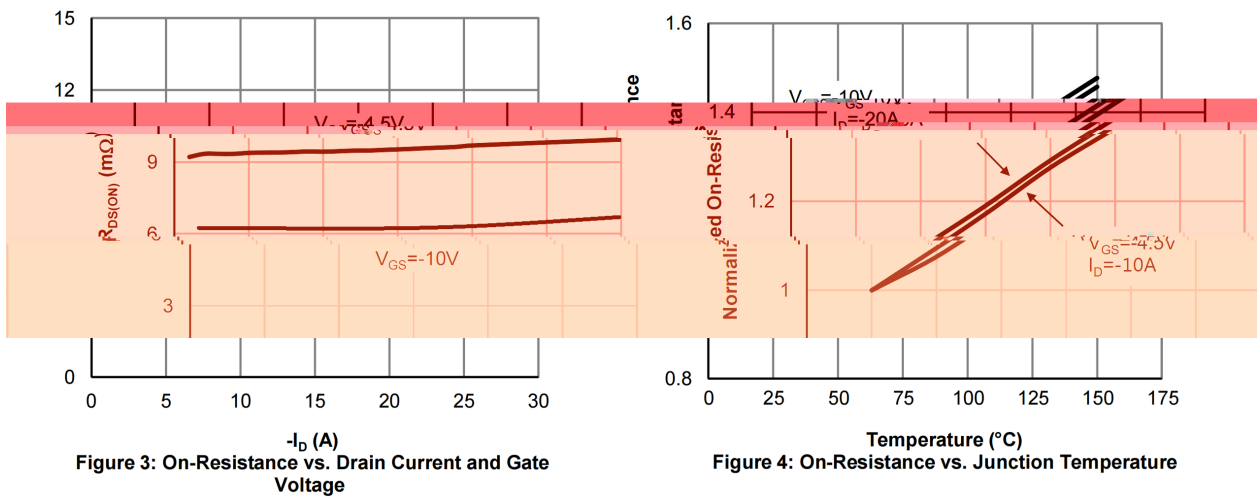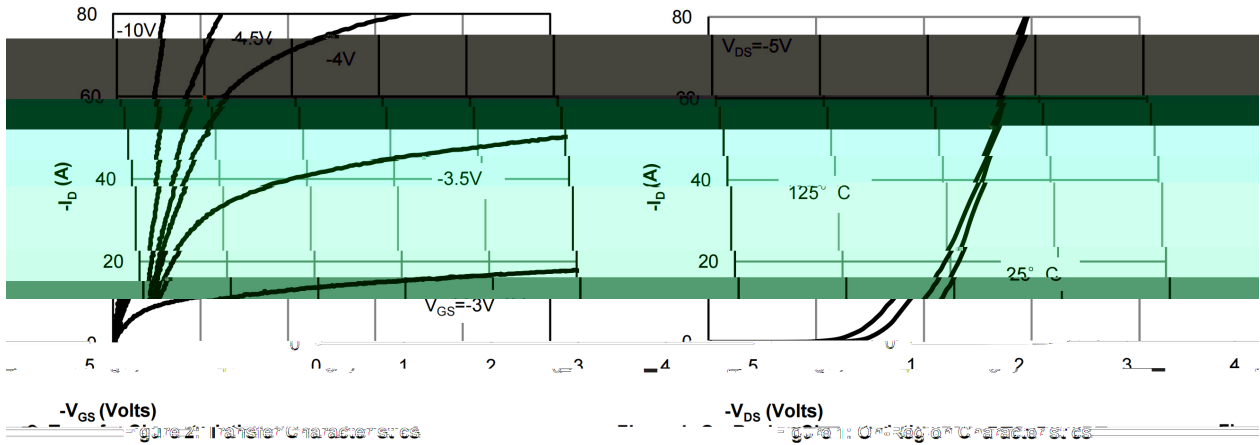




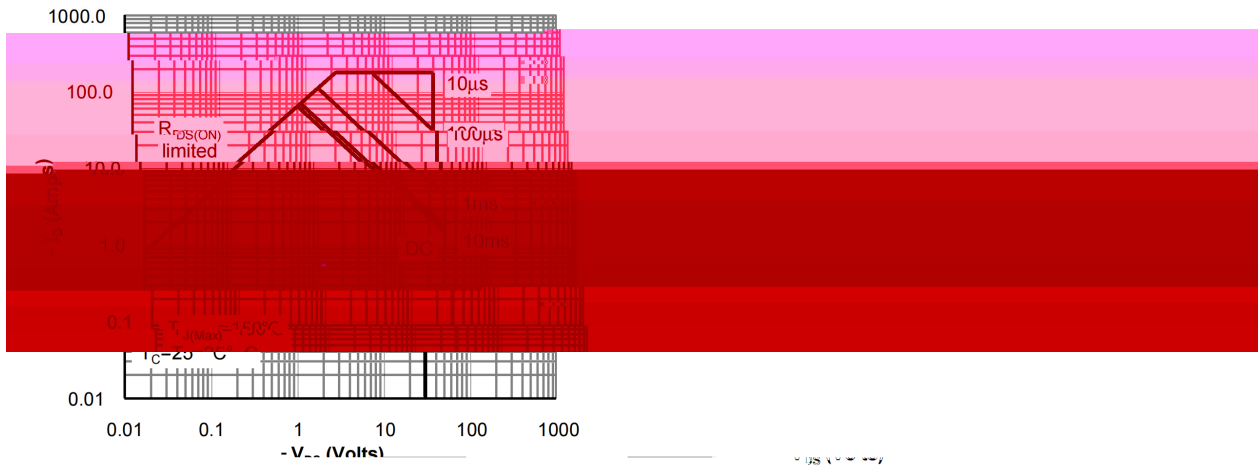


Figure 9: Maximum Forward Biased Safe Operating Area

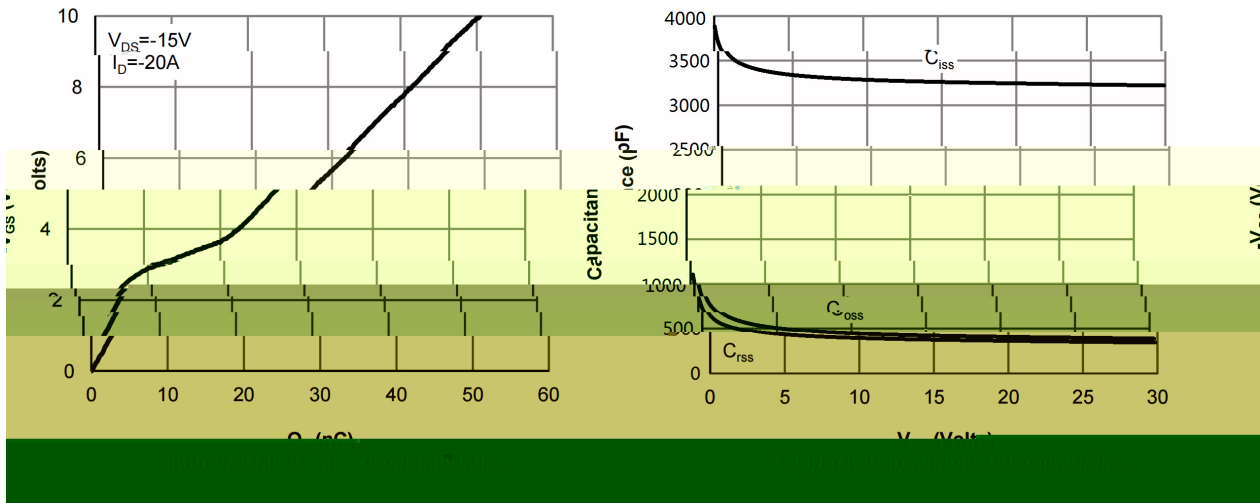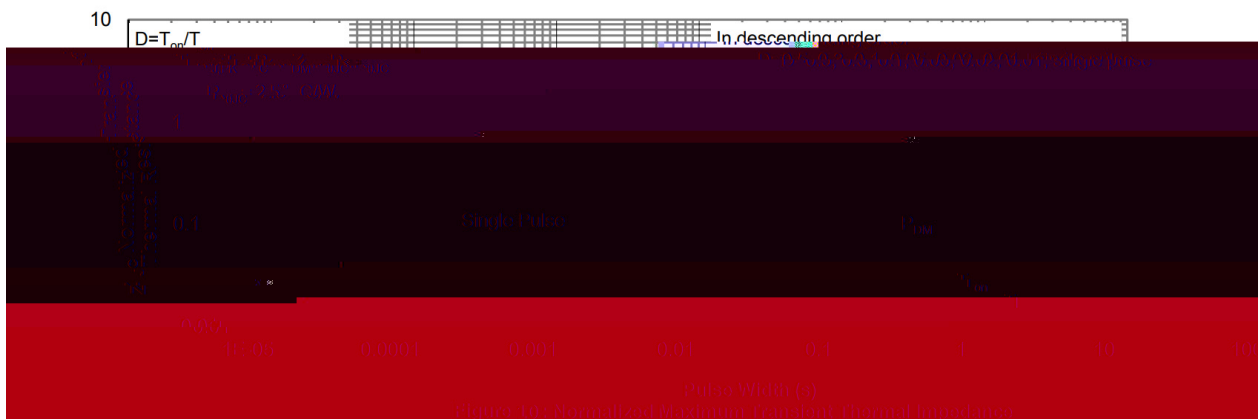


PDFN5 X6

Unit:mm

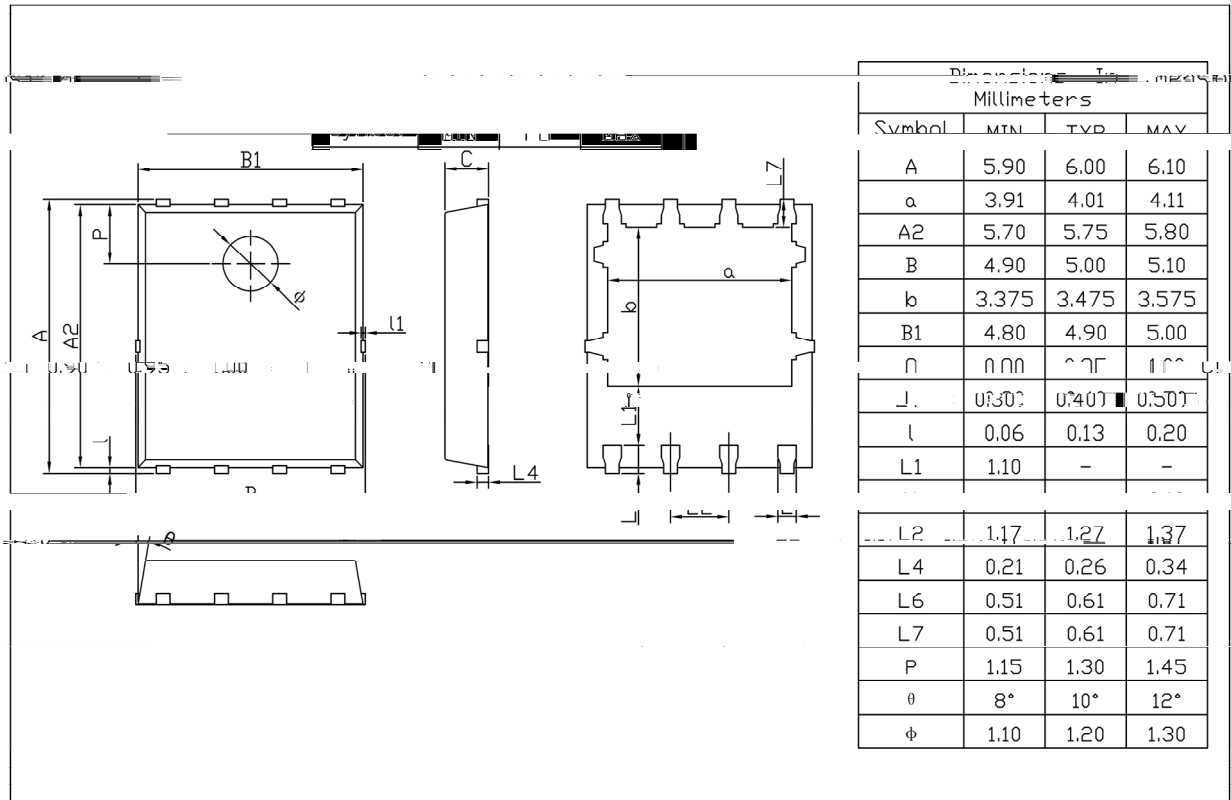


Rev.01 202209

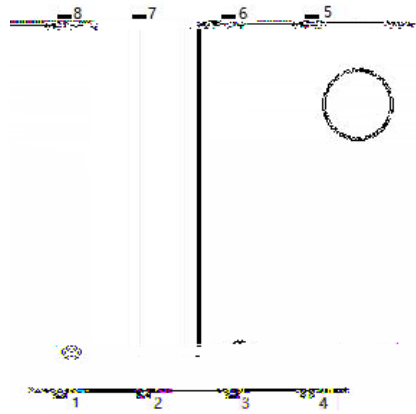

BR

Temperature Profile for IR Reflow Soldering(Pb-Free)

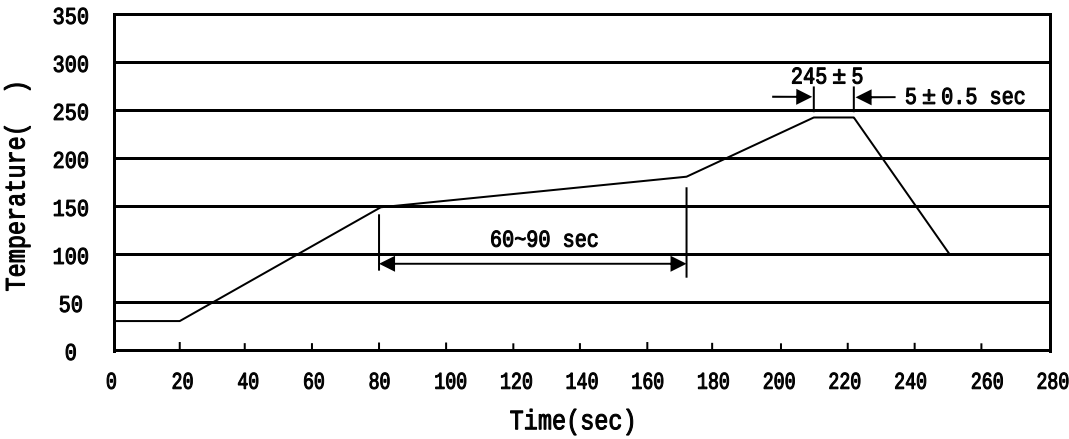

± ± ± ±

± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box