


/ Descriptions

/ Features


Ω

/ Applications

/ Equivalent Circuit

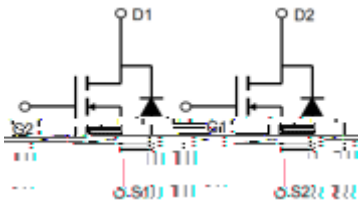

/ Pinning

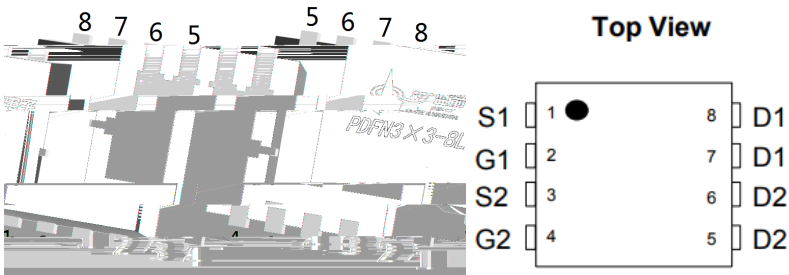

/ Marking




/ Absolute Maximum Ratings(Ta=25)

		θ		
		θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω Ω				

/ Electrical Characteristic Curve

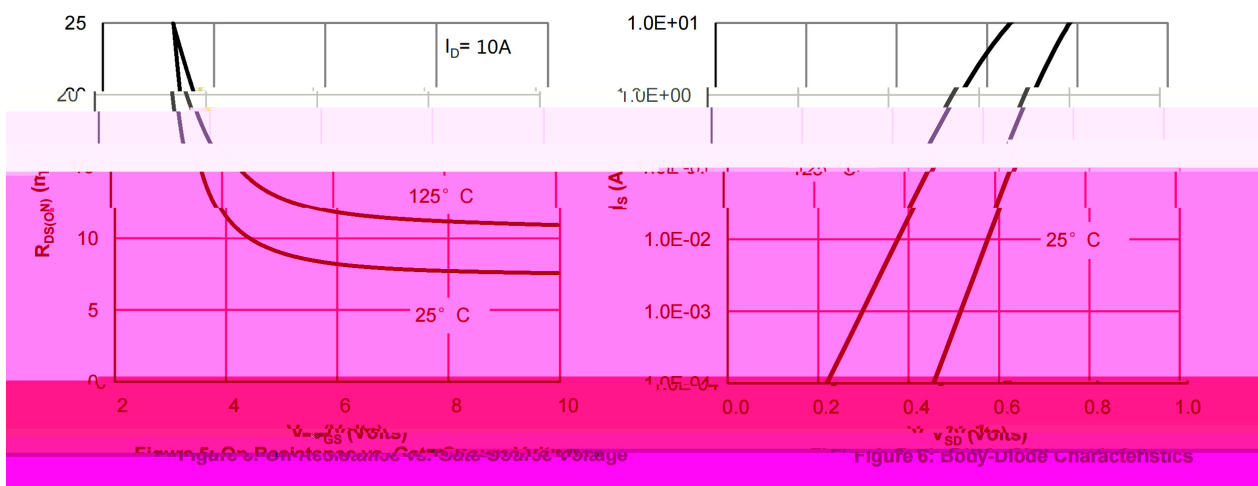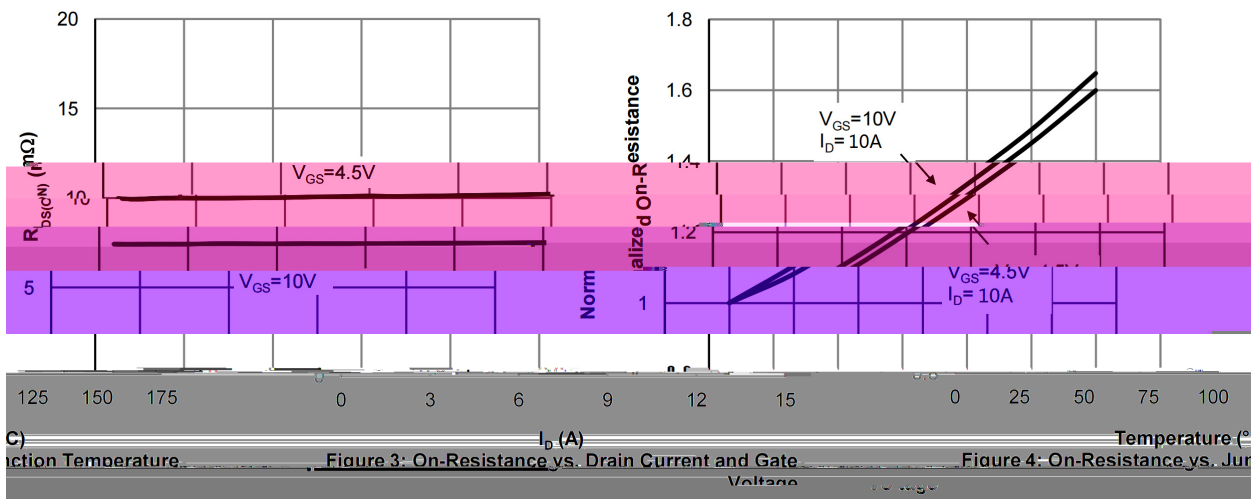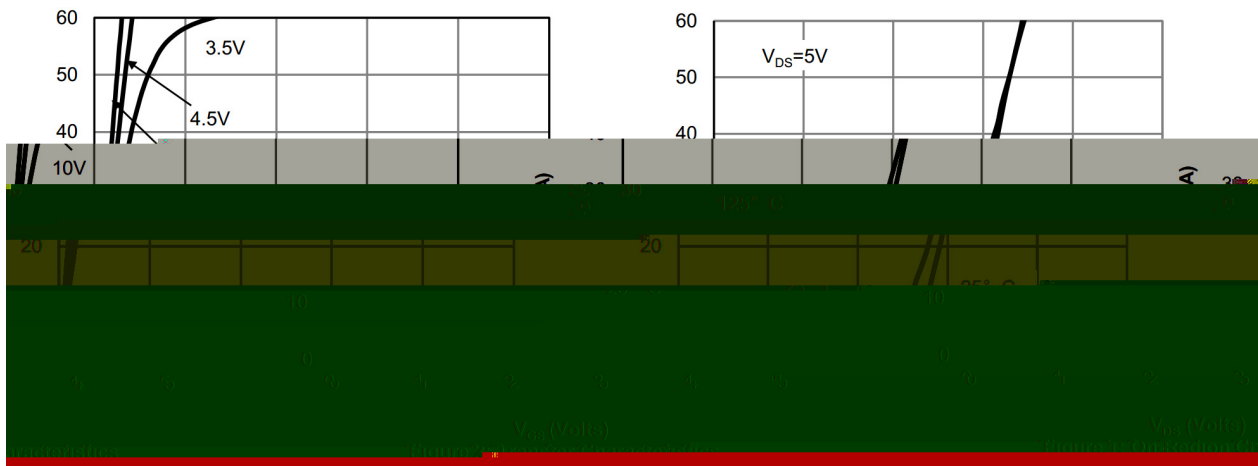


N- / N-CHANNEL Electrical Characteristic Curve

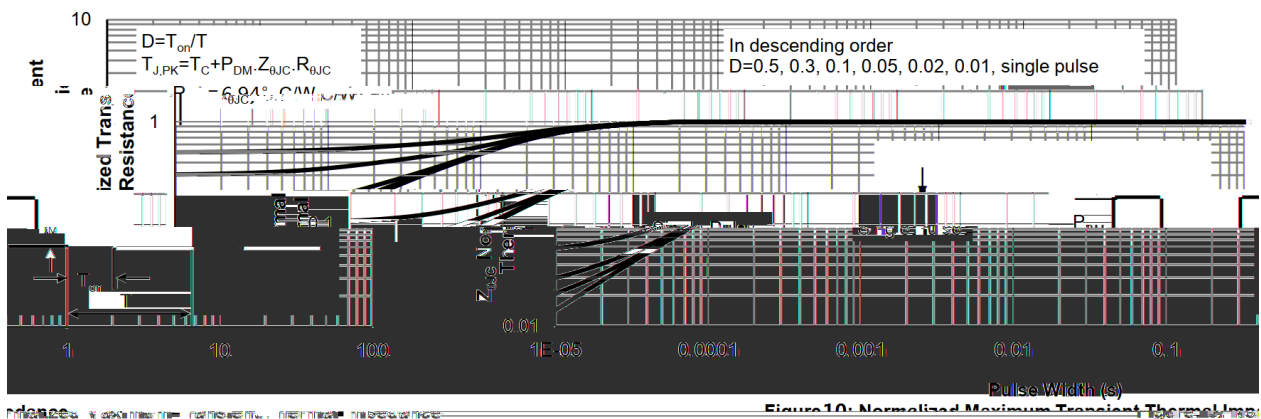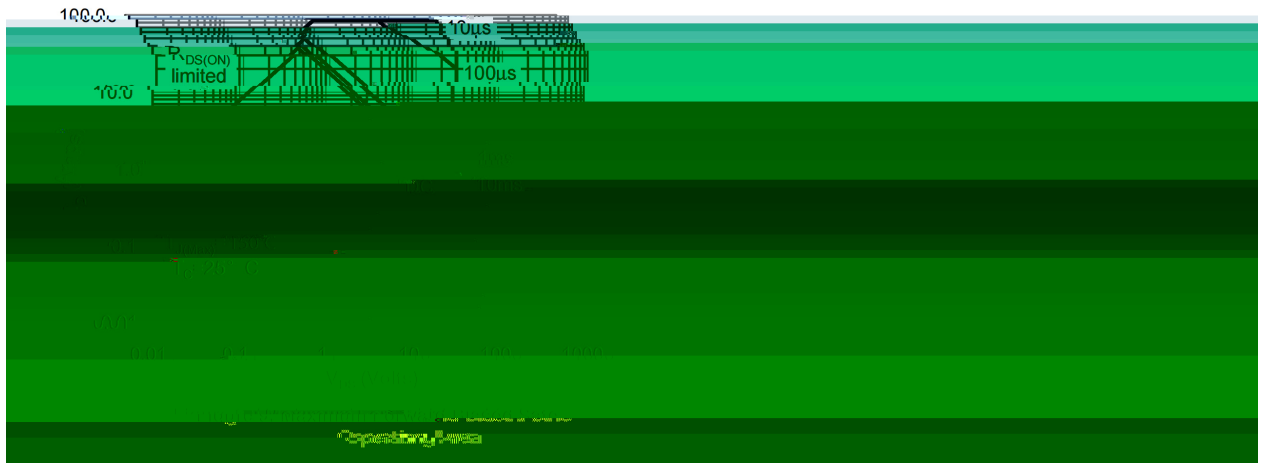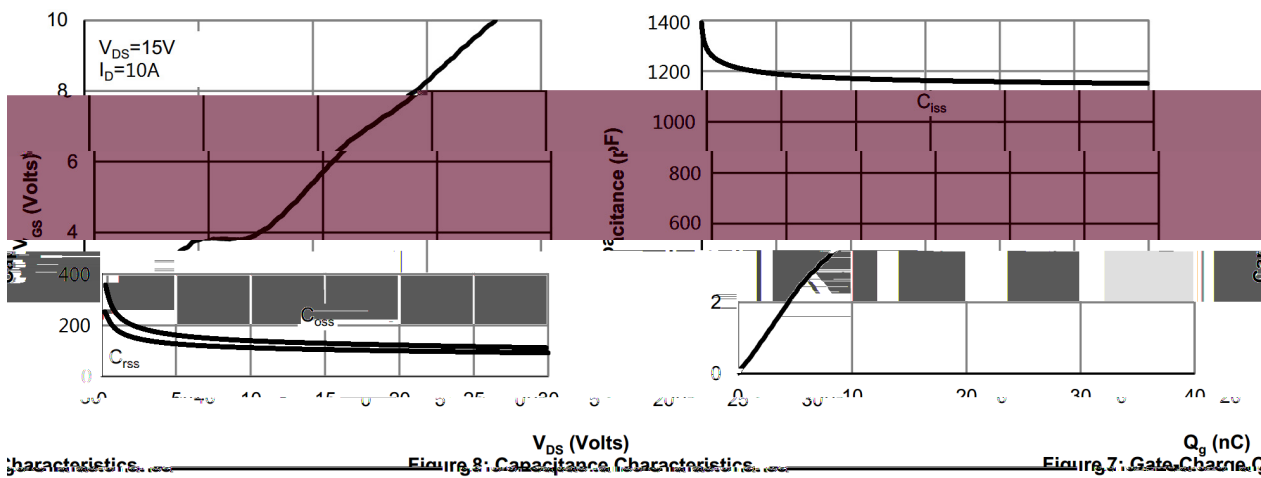

/ Package Dimensions


PDFN3X3-8L

Unit:mm

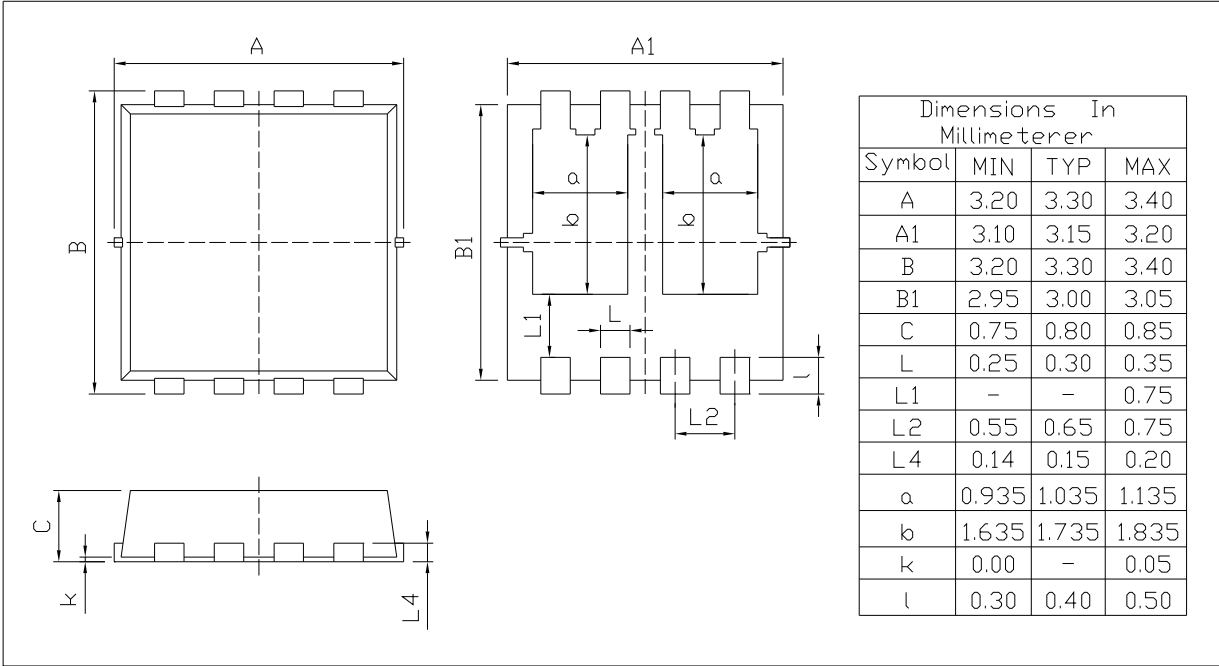


Rev.00 202011

/ Marking Instructions

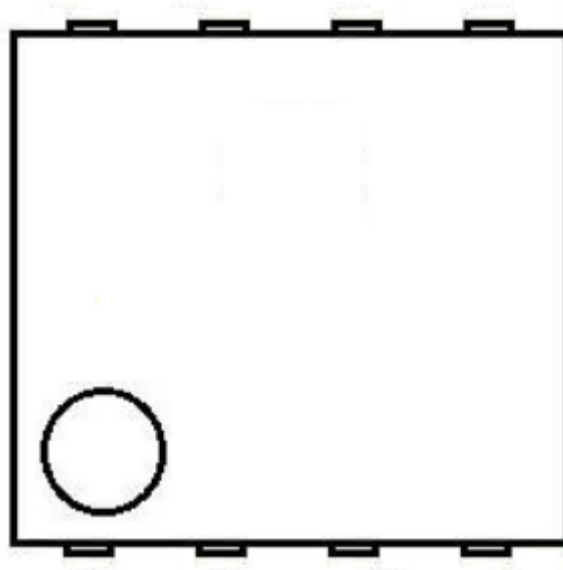

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

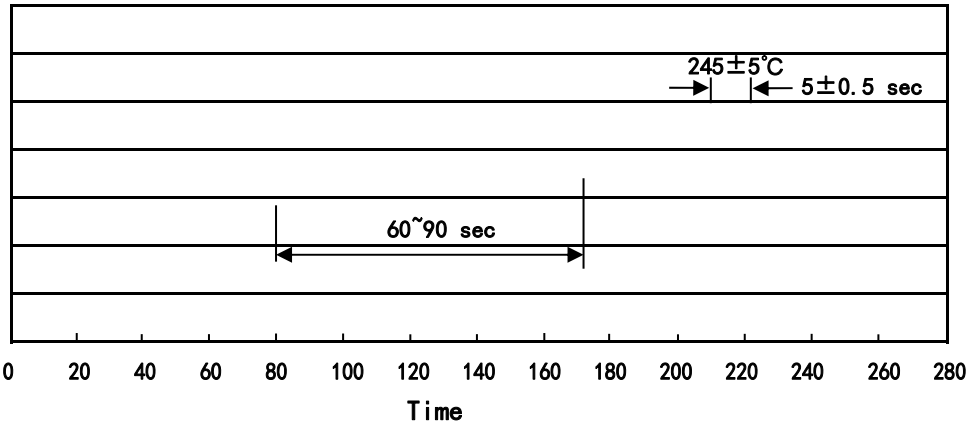

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices