




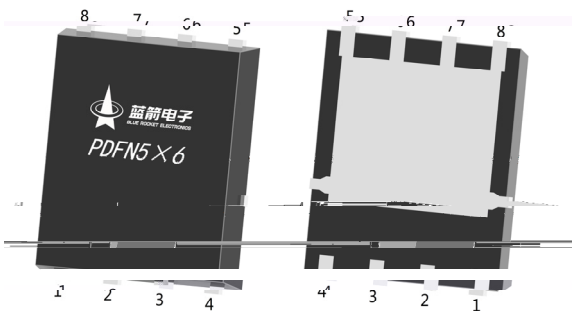

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D



		Ω Ω				

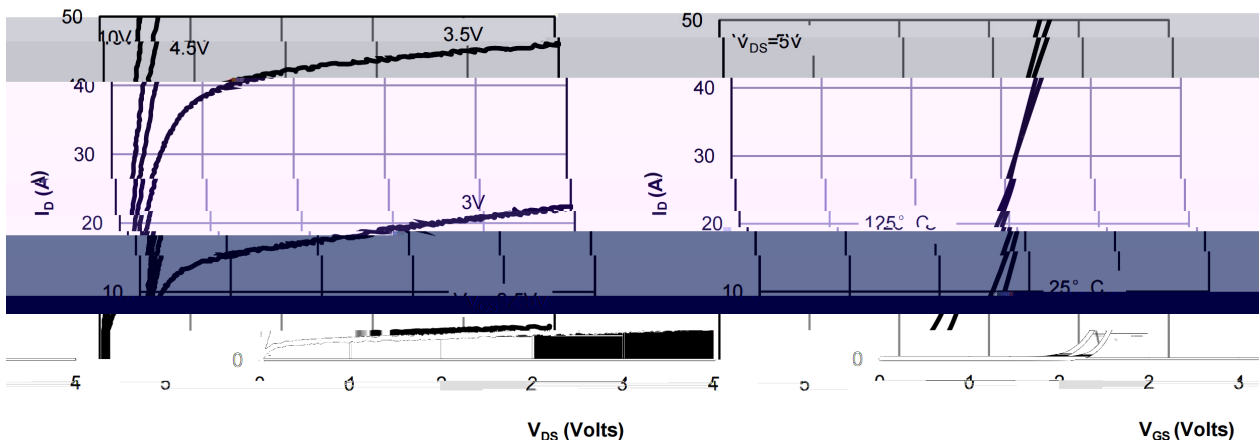

Characteristics

Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

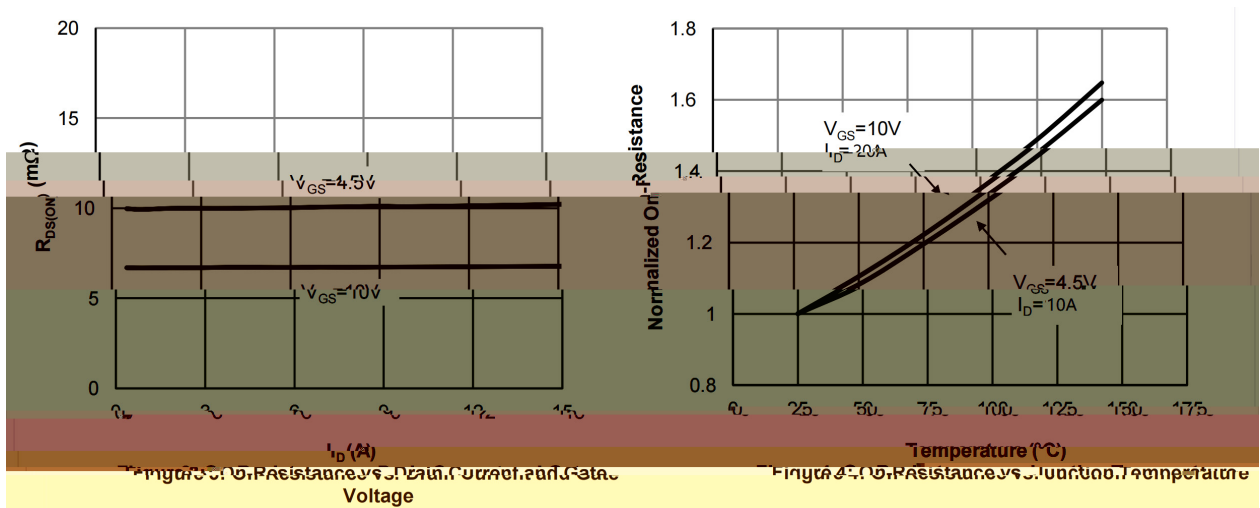


Figure 3: On-Resistance vs. Drain Current

Figure 4: Normalized On-Resistance vs. Temperature

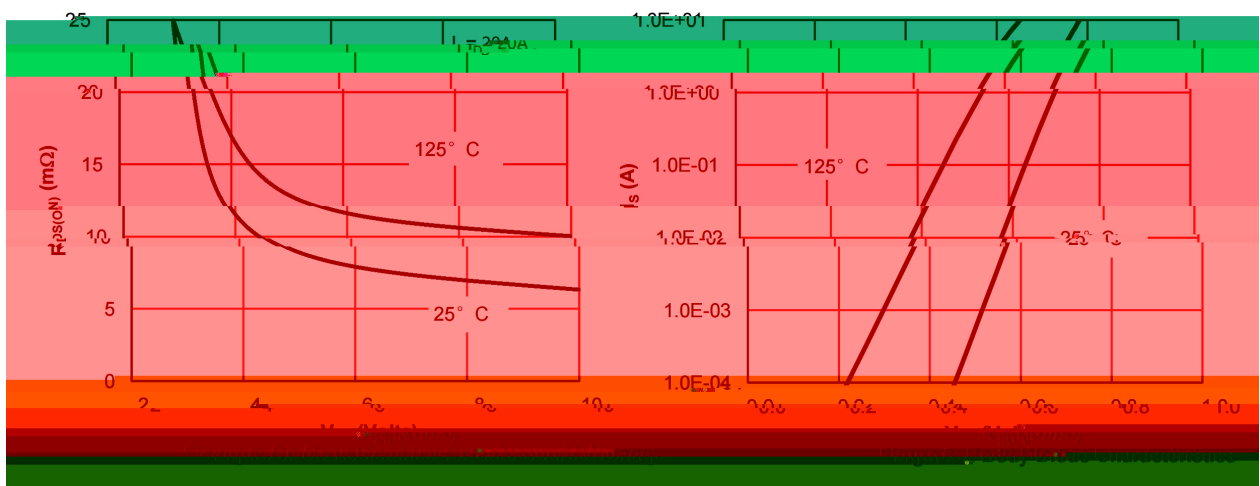


Figure 5: On-Resistance vs. Drain Current

Figure 6: On-Resistance vs. Drain Current






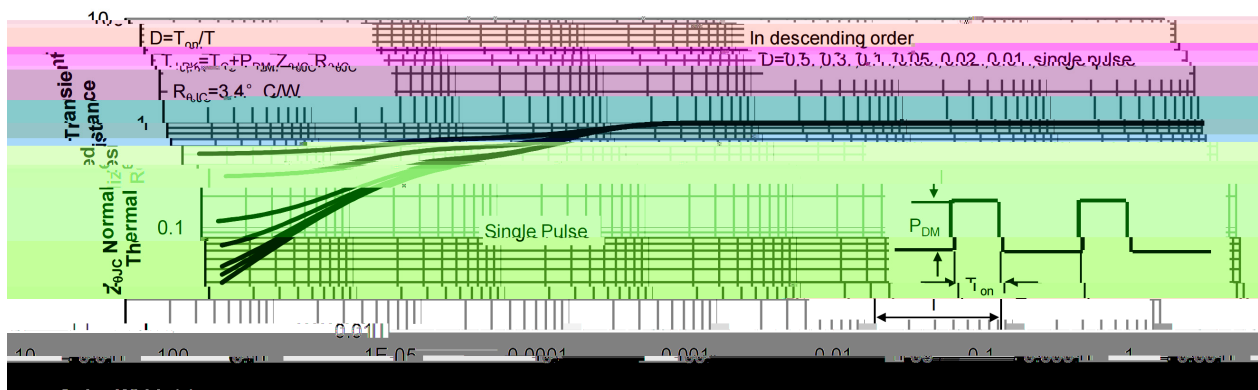


Figure 11: Normalized Maximum Transient Thermal Impedance

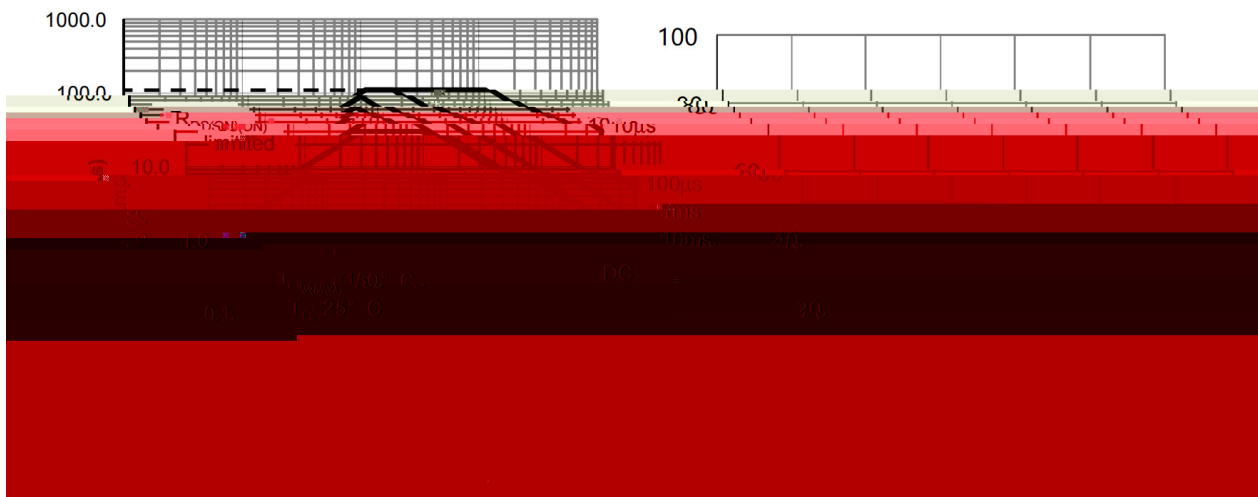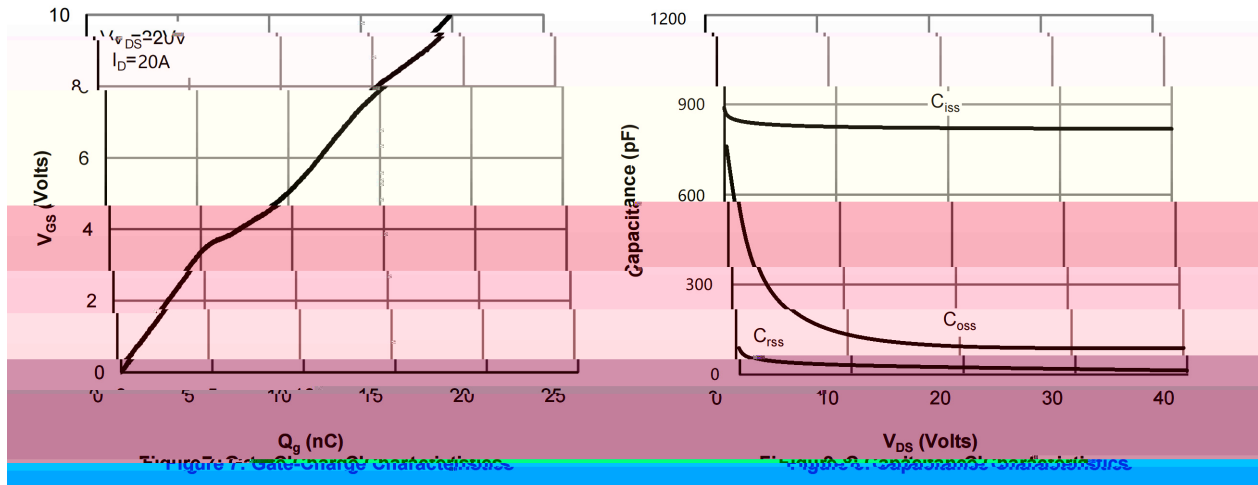

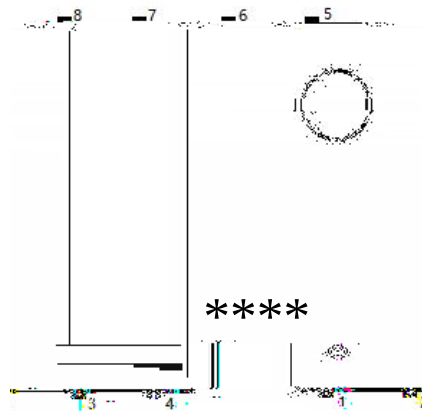

Temperature Profile for IR Reflow Soldering(Pb-Free)

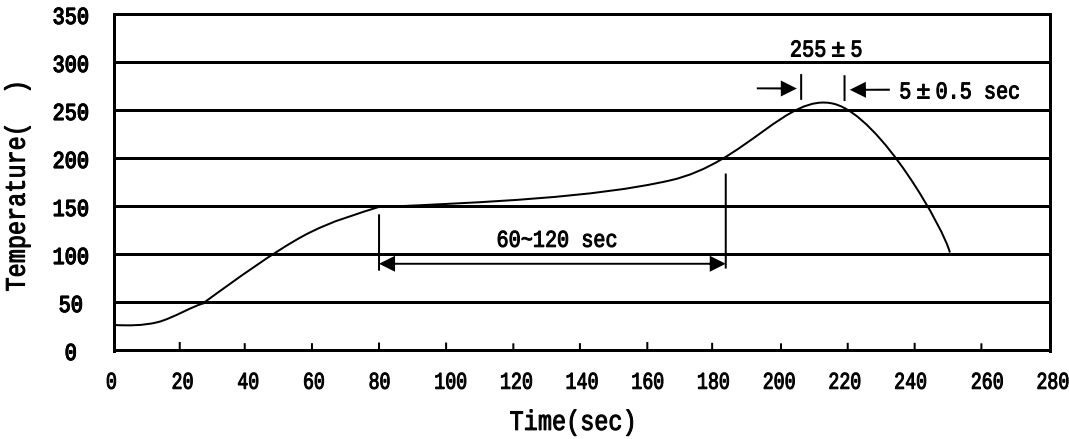

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
×						×	×	×