

/ Descriptions


PDFN 3×3A-8L                      P                      MOS

/ Features

±  
≤  
AEC-Q101                      。

/ Applications

/

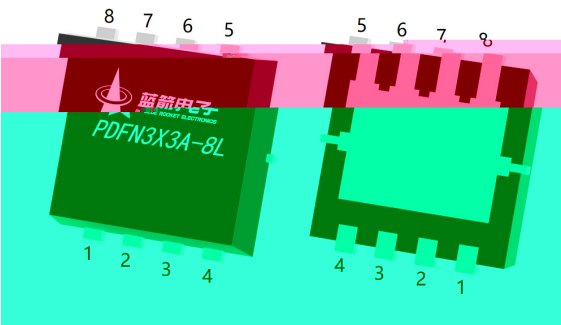

/ Marking

/ Absolute Maximum Ratings(Ta=25 )

|  |   |   |   |  |
|--|---|---|---|--|
|  |   |   |   |  |
|  |   |   |   |  |
|  |   | ℃ |   |  |
|  |   |   |   |  |
|  |   |   | ± |  |
|  |   | ℃ |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  | ≤ | θ |   |  |
|  |   |   |   |  |
|  |   | θ |   |  |

/ Electrical Characteristics(Ta=25 )

|  |  |   |  |  |   |   |
|--|--|---|--|--|---|---|
|  |  |   |  |  |   |   |
|  |  | μ |  |  |   |   |
|  |  |   |  |  |   |   |
|  |  |   |  |  | ± |   |
|  |  | μ |  |  |   |   |
|  |  |   |  |  |   | Ω |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   | Ω |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   |   |
|  |  |   |  |  |   |   |

/ Electrical Characteristics(Ta=25 )

|  |  |                   |  |  |  |  |
|--|--|-------------------|--|--|--|--|
|  |  |                   |  |  |  |  |
|  |  | $\Omega$ $\Omega$ |  |  |  |  |
|  |  |                   |  |  |  |  |
|  |  |                   |  |  |  |  |
|  |  |                   |  |  |  |  |

## / Electrical Characteristic Curve

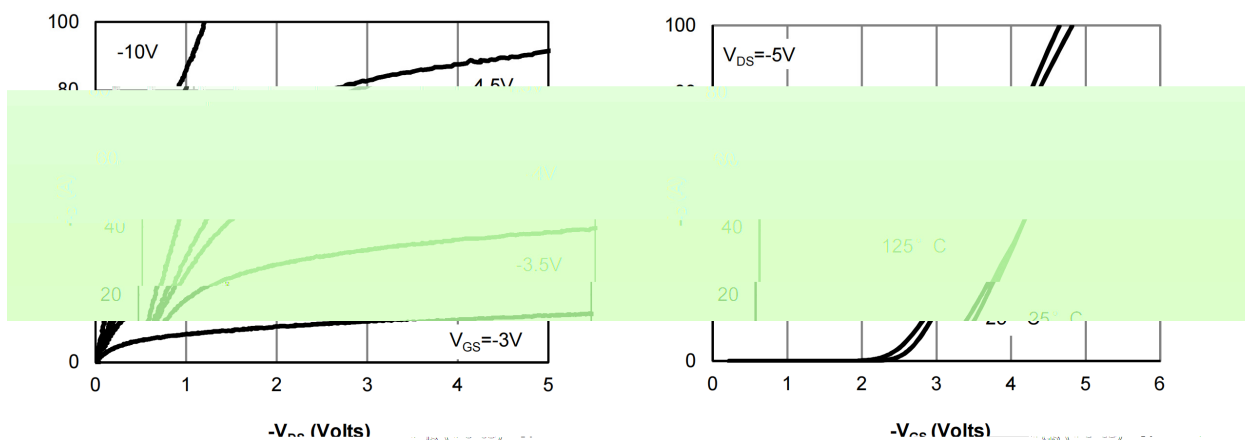


Figure 2: Transfer Characteristics

Figure 3: On-Resistance Characteristics

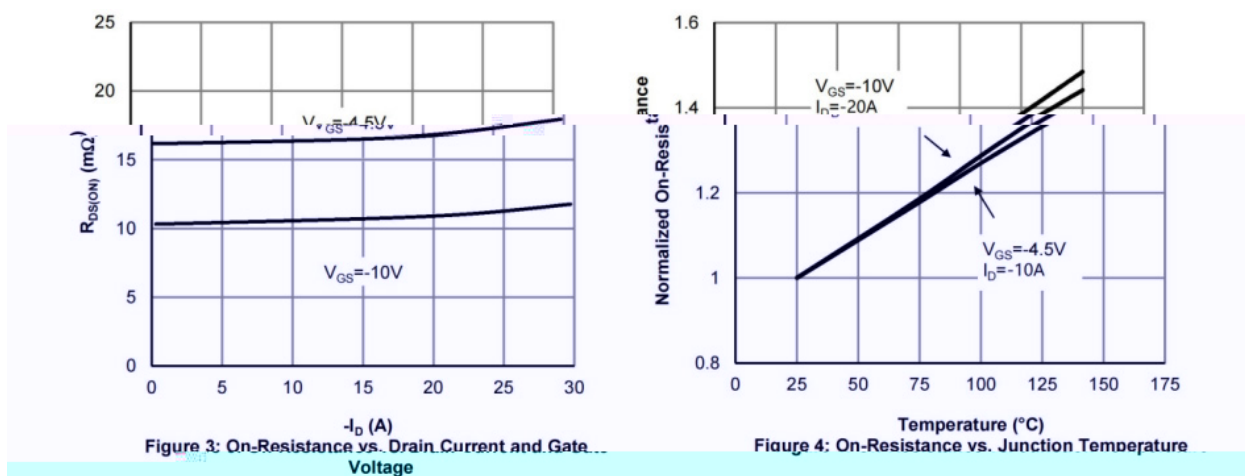


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Junction Temperature




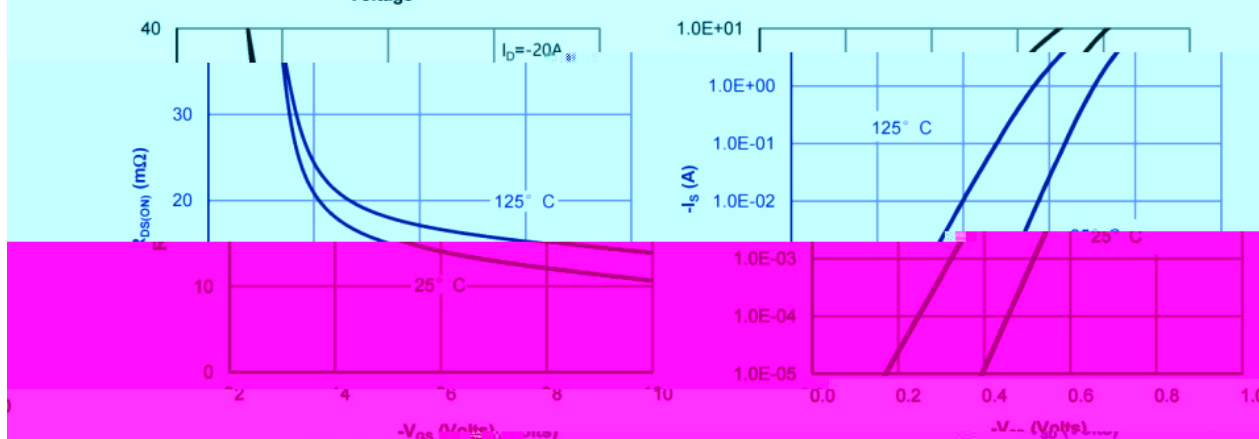


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics


/ Electrical Characteristic Curve

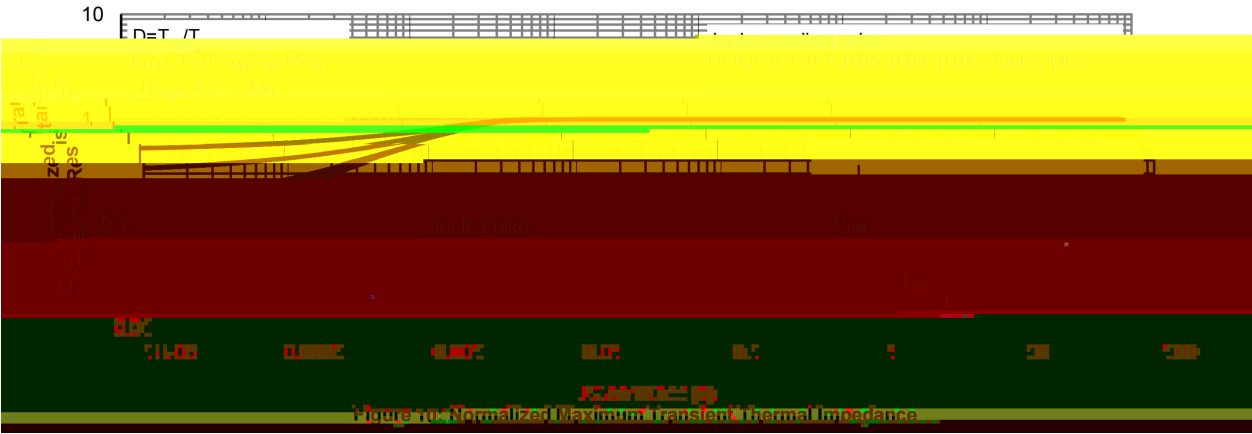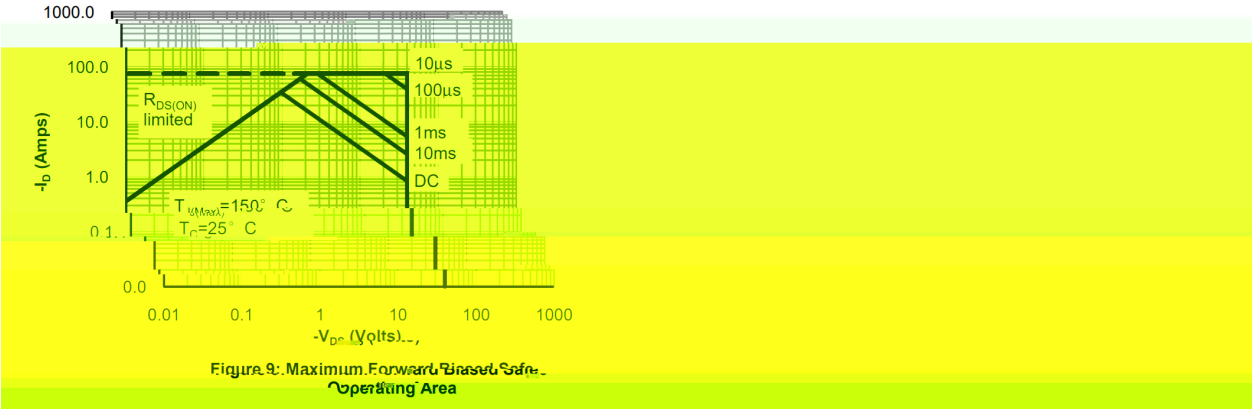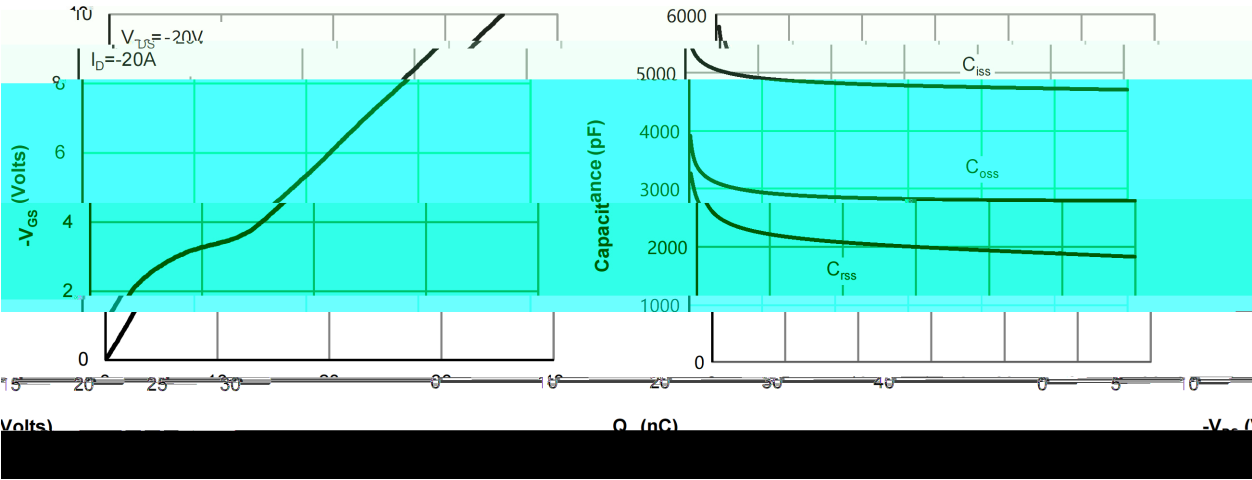

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

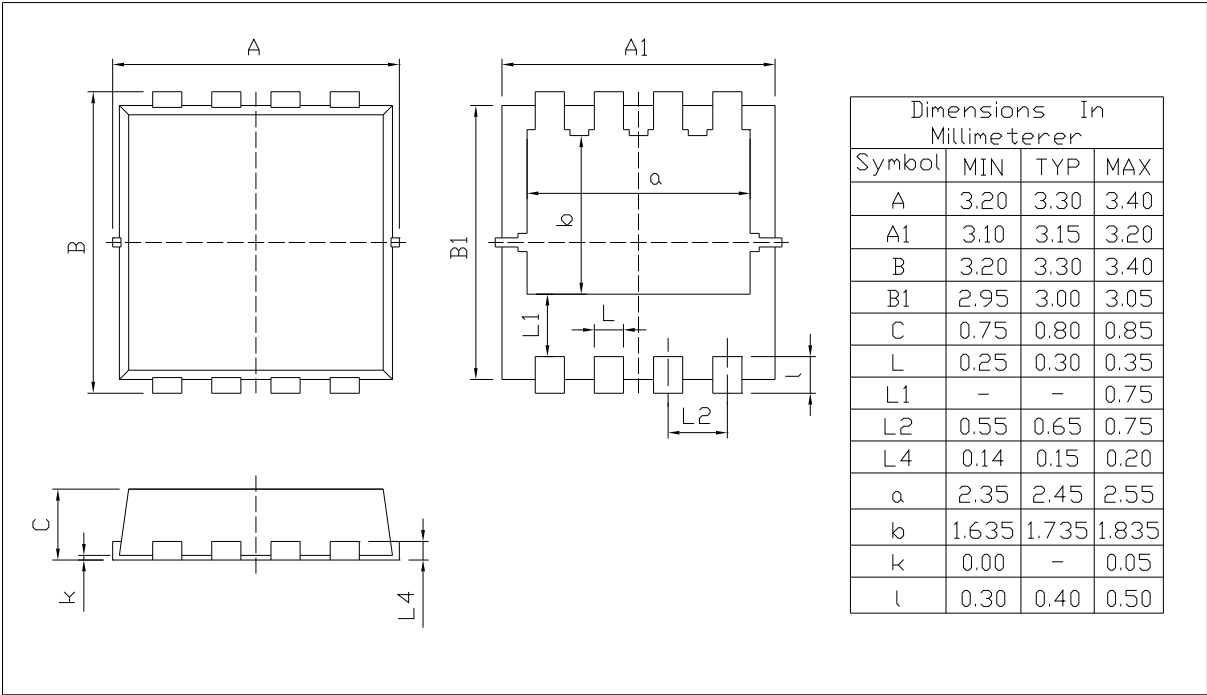

Rev.00 202011

/ Marking Instructions

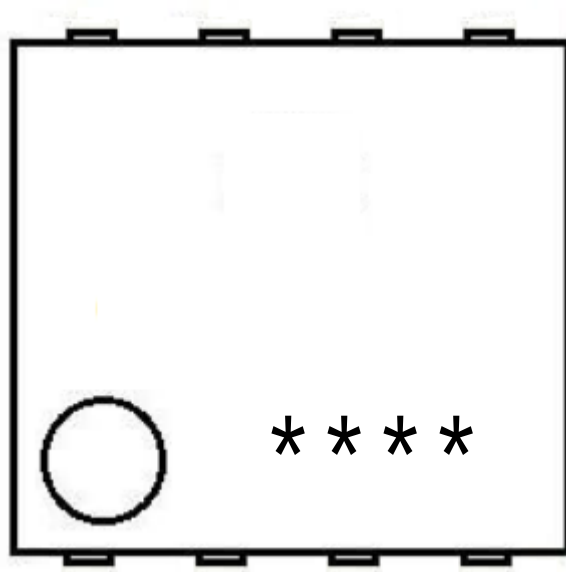

\*\*\*\*

