

/ Descriptions

x


/ Features

Ω Ω
 Ω Ω


/ Applications

LED

/ Equivalent Circuit

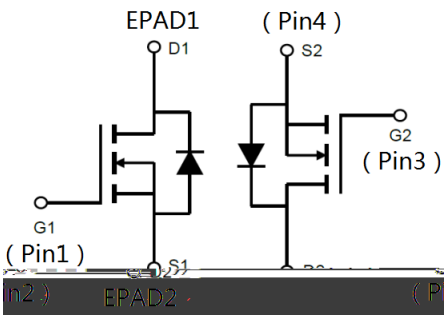

/ Pinning

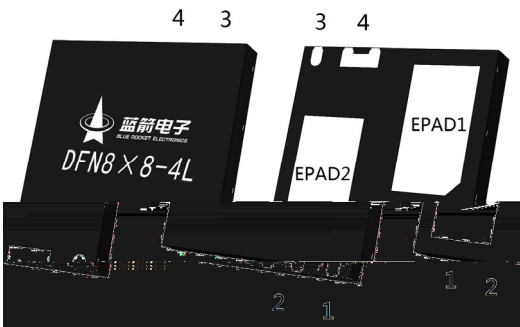

/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

		Ω				
		μ				

/ Electrical Characteristic Curve

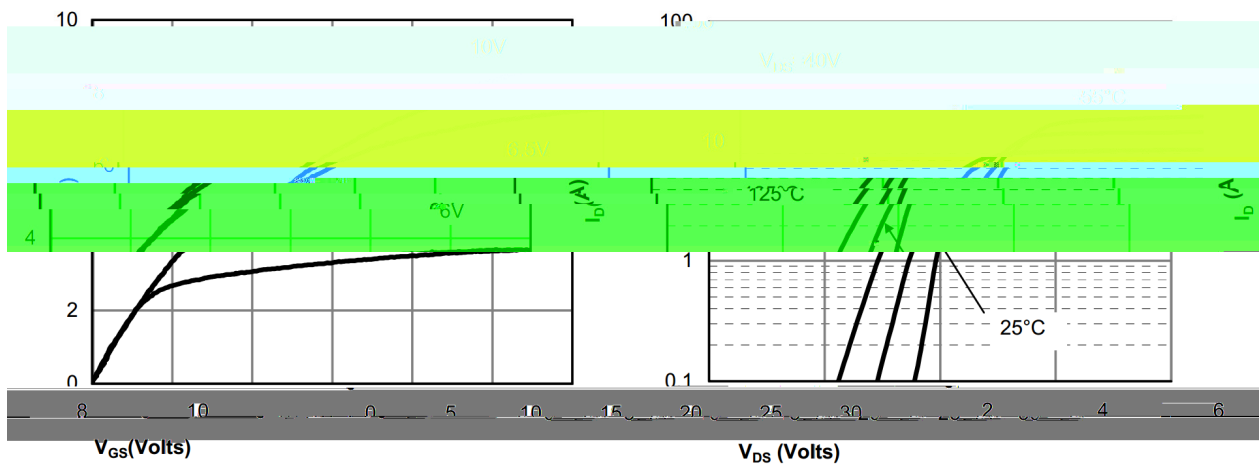


Fig 1: On-Region Characteristics


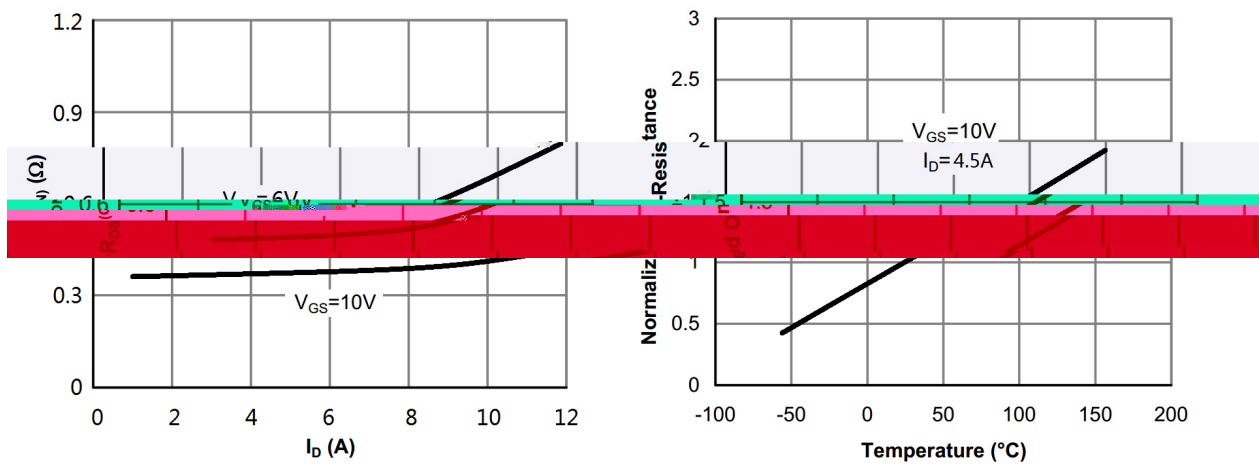


Figure 2: Transfer Characteristics

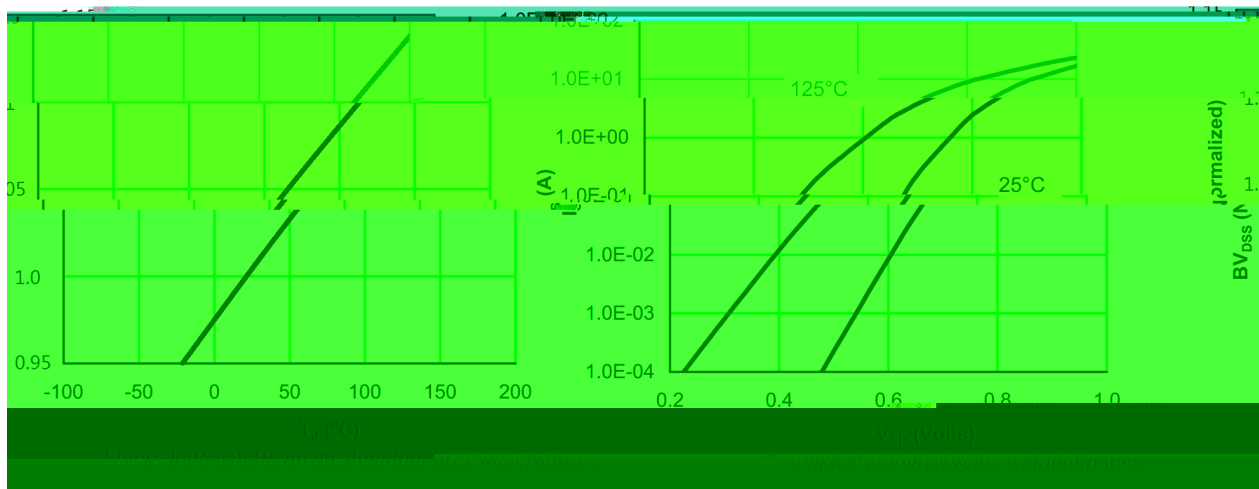

/ Electrical Characteristic Curve

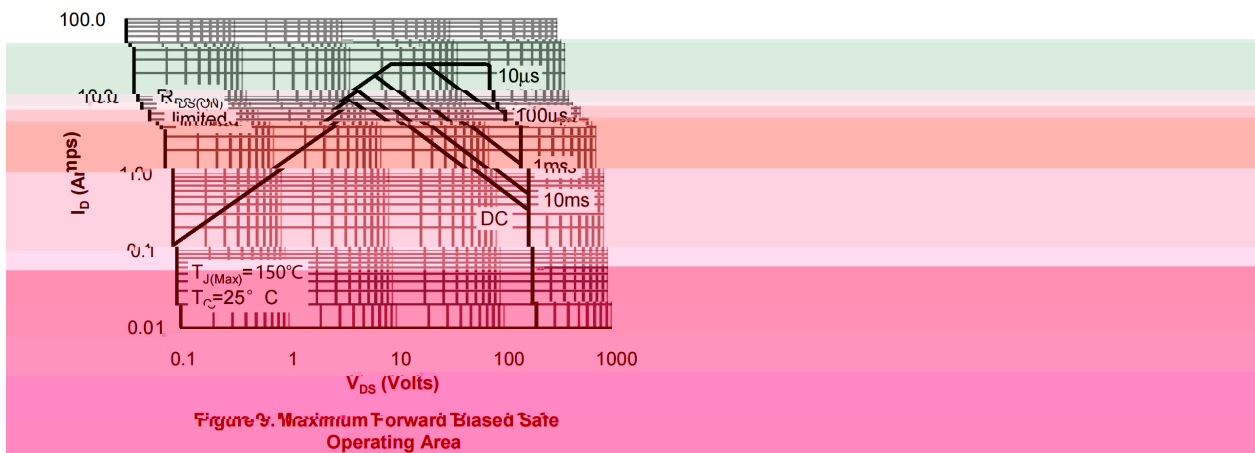
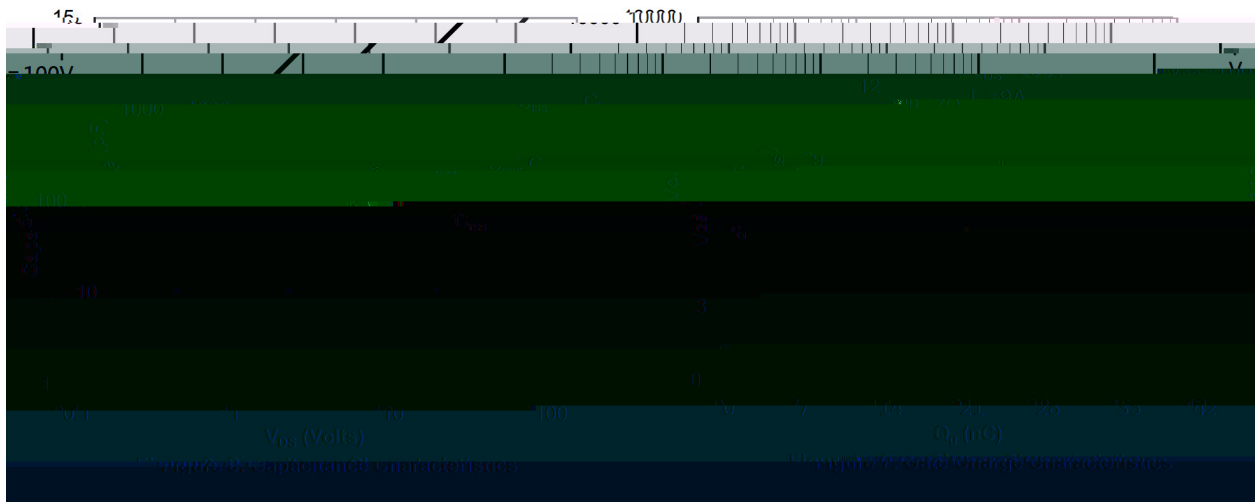


Figure 3. Maximum Forward Biased Safe Operating Area


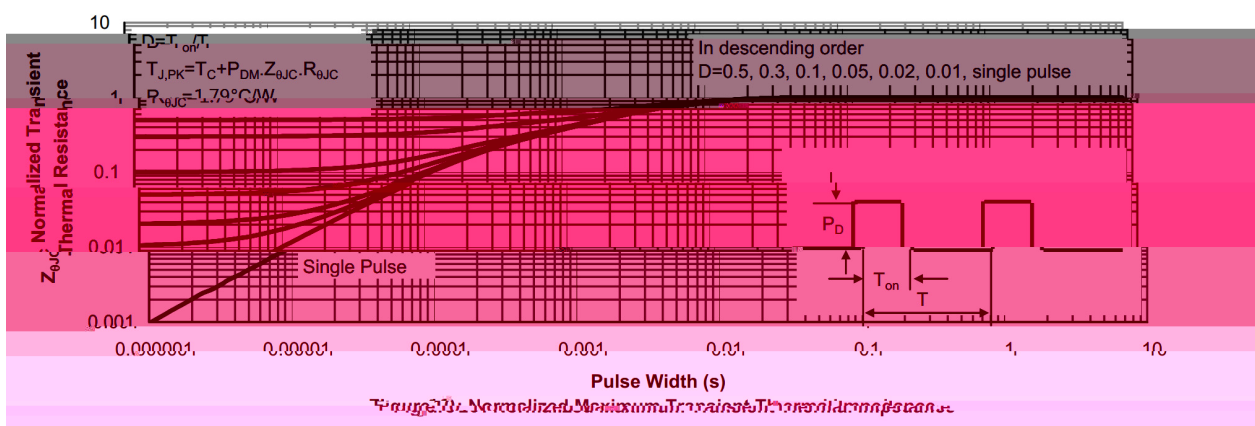


Figure 2. Normalized Maximum Power Dissipation

/ Package Dimensions


DFN8X8-4L

Unit:mm

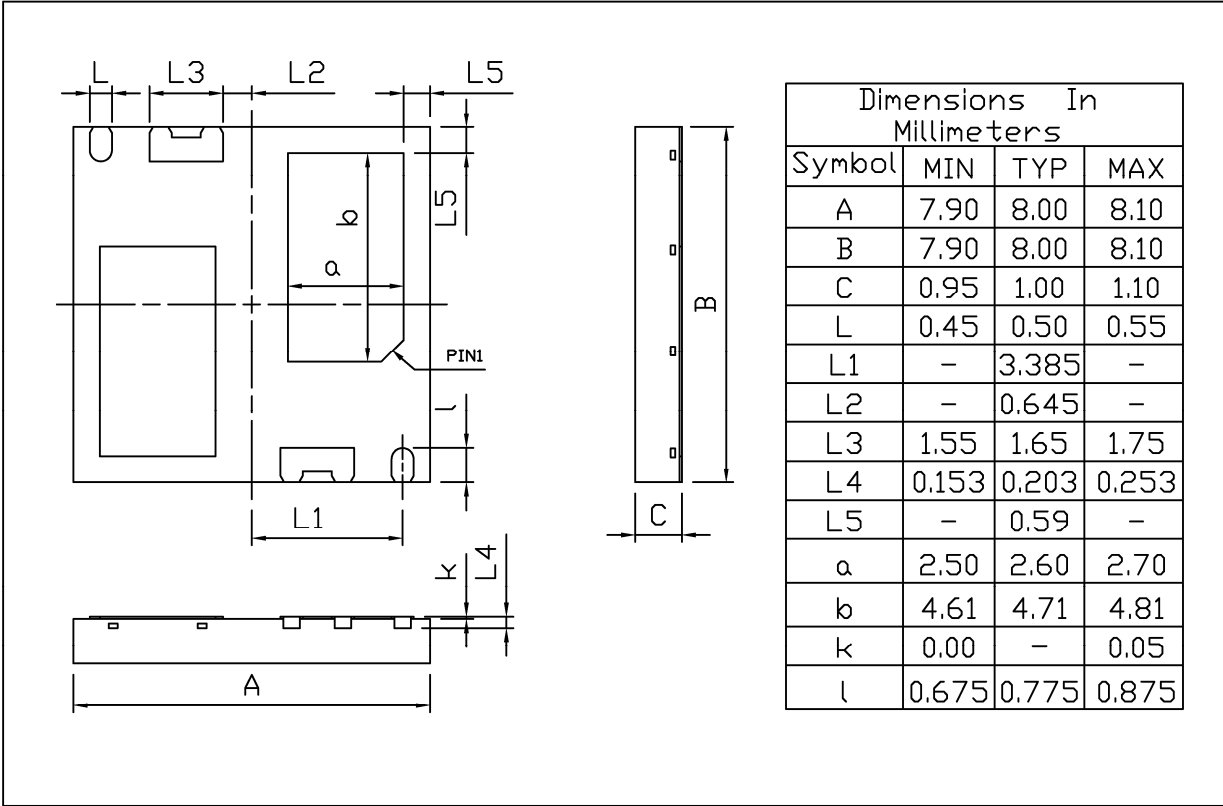

Rev.00 202307

/ Marking Instructions



BR

9N20
