



Ω


Ω

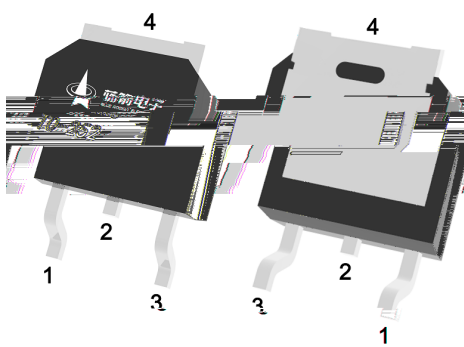


		μ				
						μ
		μ				
						Ω




		Ω				
		μ				

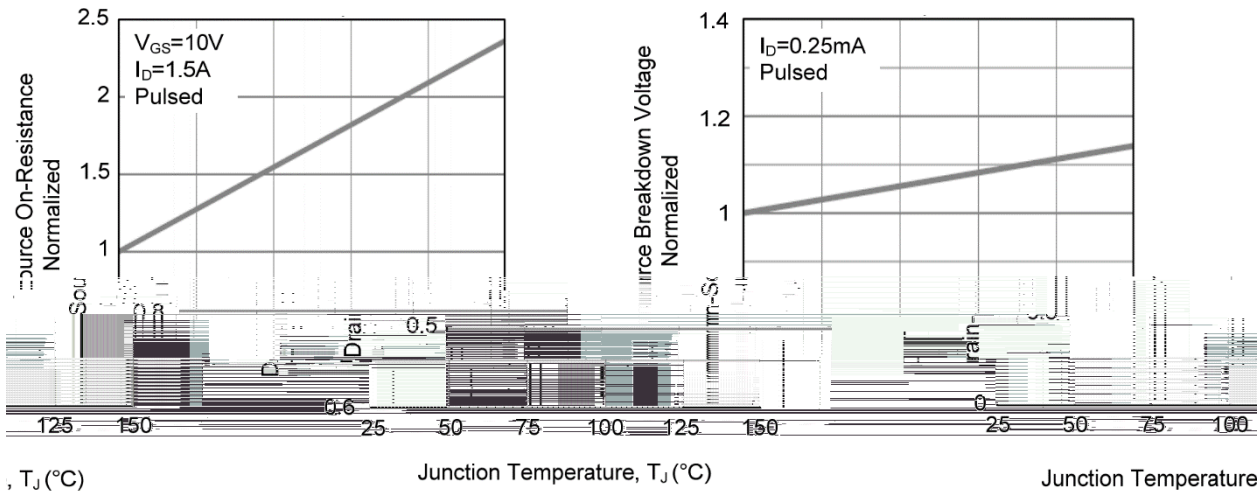


1. Drain-Source On-Resistance vs. Junction Temperature

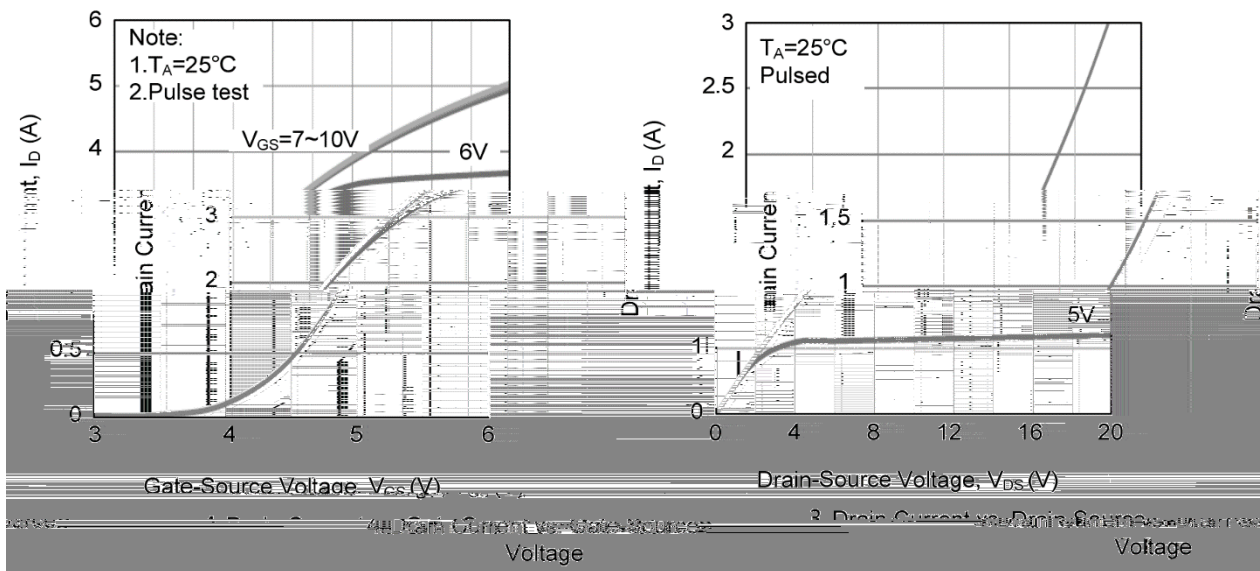

2. Drain Current vs. Drain-Source Voltage

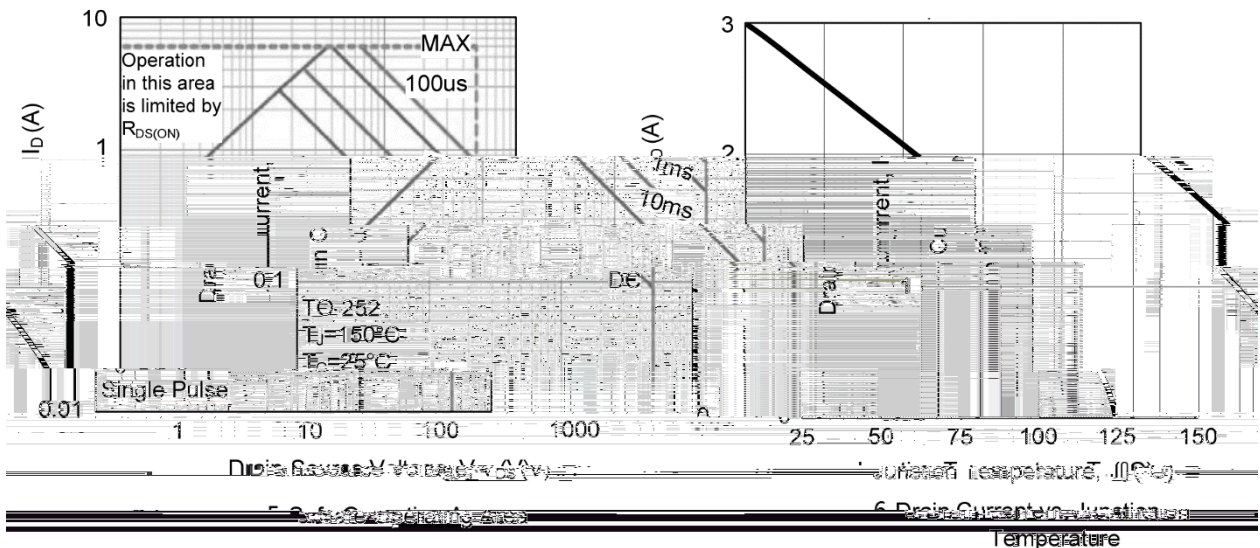


3. Drain Current vs. Junction Temperature

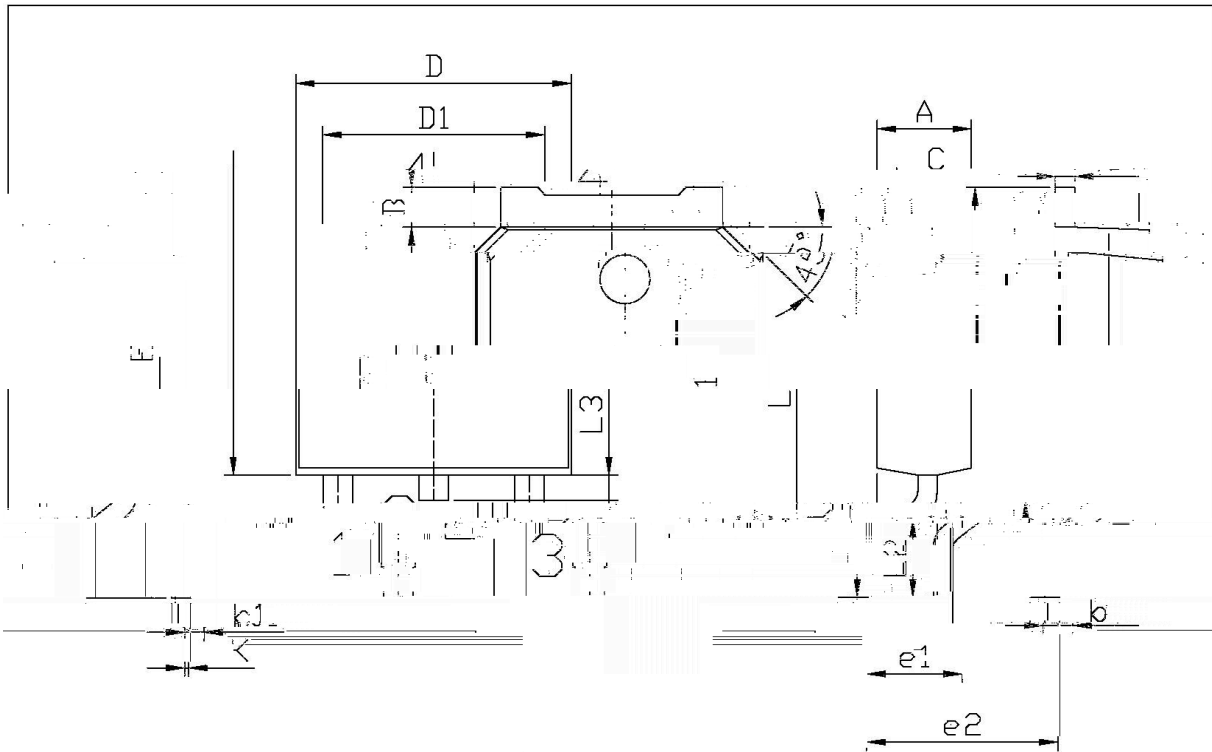

单位: mm


Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min.	Max.			Min.	Max.
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25
5.24		6.25	8.25	5.24		6.25	8.25

TD-252

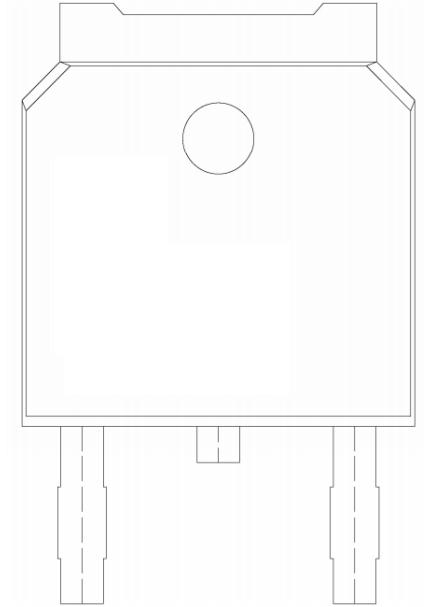

3N50AF

Temperature Profile for IR Reflow Soldering(Pb-Free)

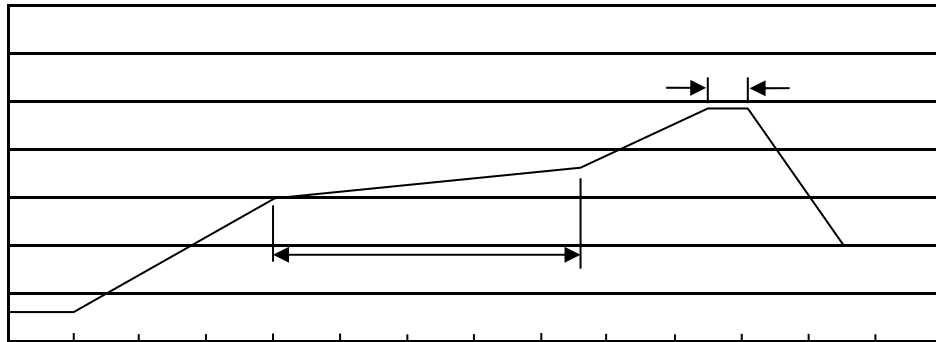

±

±

±

±

±

±

°C

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box