


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

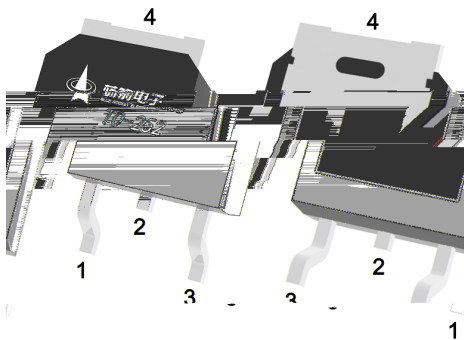

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

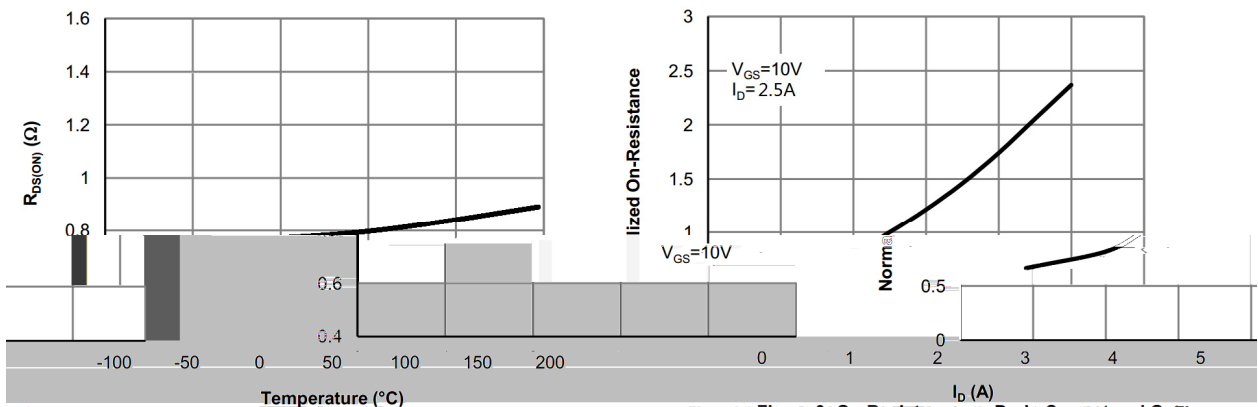
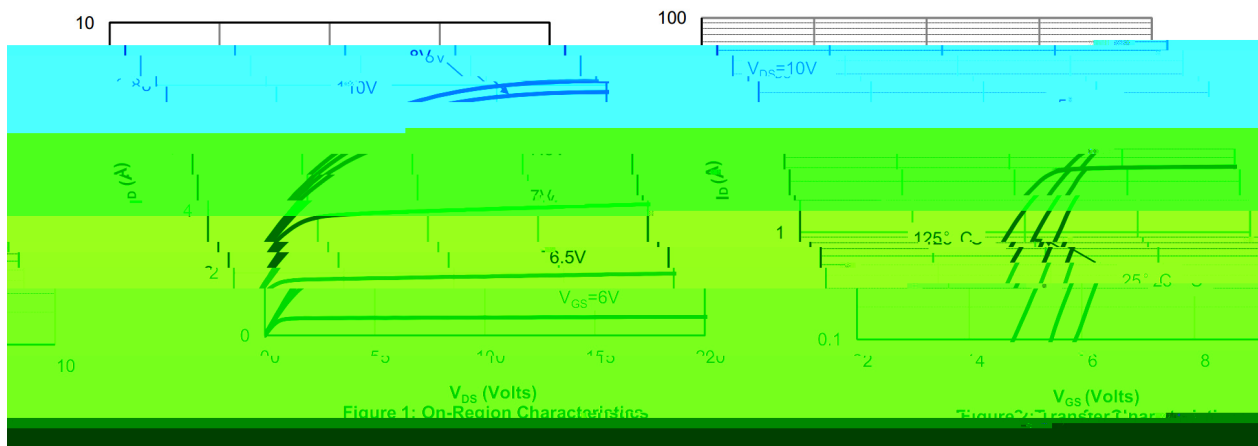


Figure 4: On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage


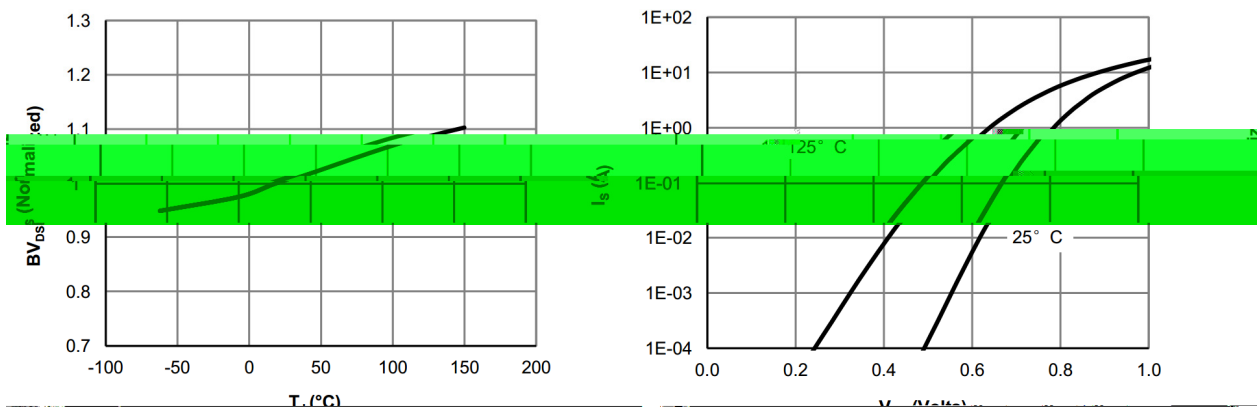


Figure 5: Normalized Drain-Source Breakdown Voltage vs. Temperature

Figure 6: Pulsed Drain Current vs. Drain-Source Voltage

/ Package Dimensions

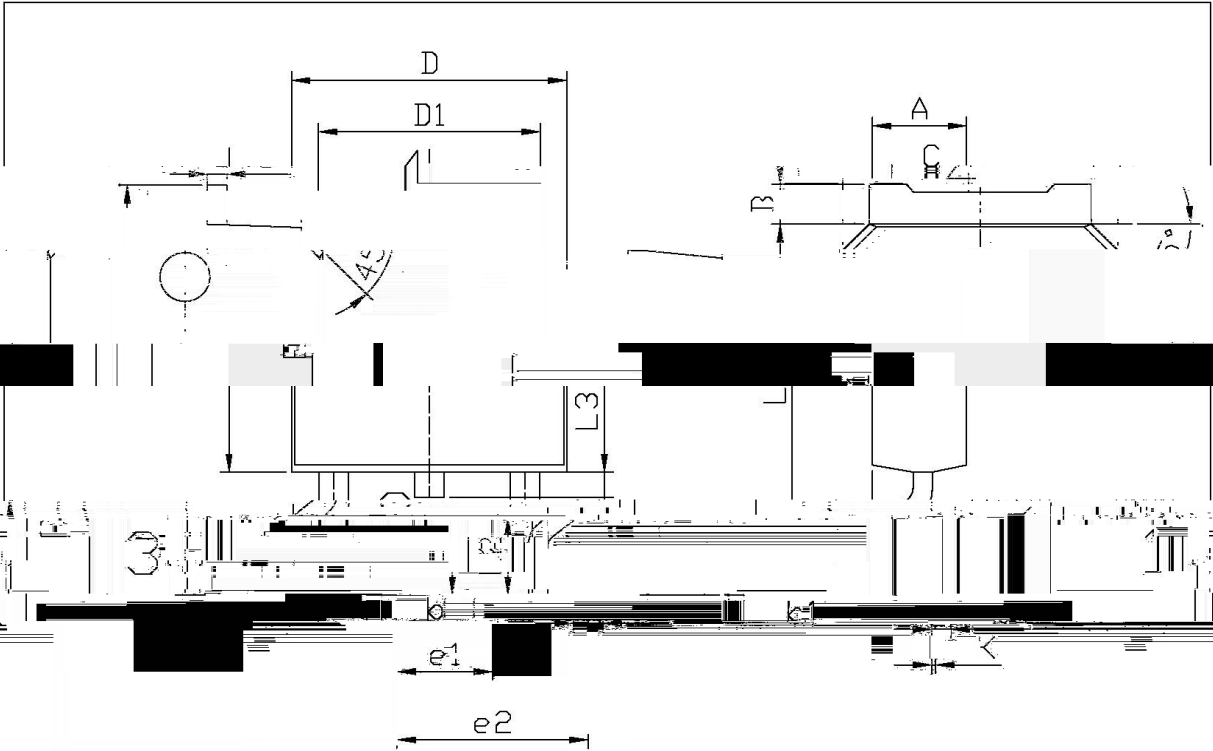


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
5.95	6.25	6.50	A	2.20	2.40
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.80	e2	9.85	10.35
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
L3	0.60	0.90	D	6.45	6.75
5.10	5.50	6.00			

T0-252

/ Marking Instructions

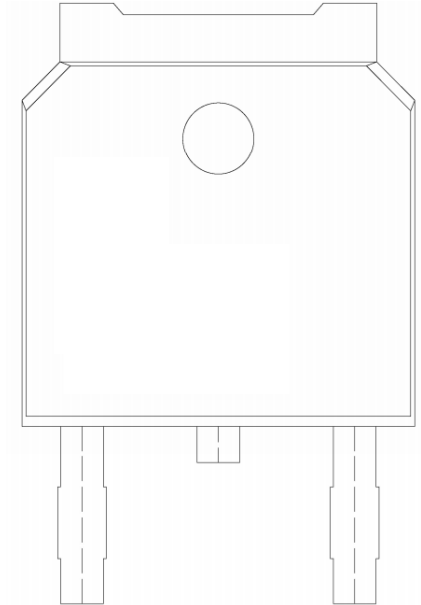

() /

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.