


/ Descriptions

650V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

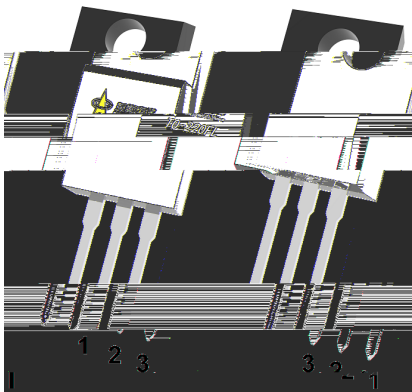

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
			℃
	θ		℃
	θ		℃


/ Electrical Characteristics(Ta=25)

		μ				
		℃				μ
		μ				
						Ω
		℃				
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

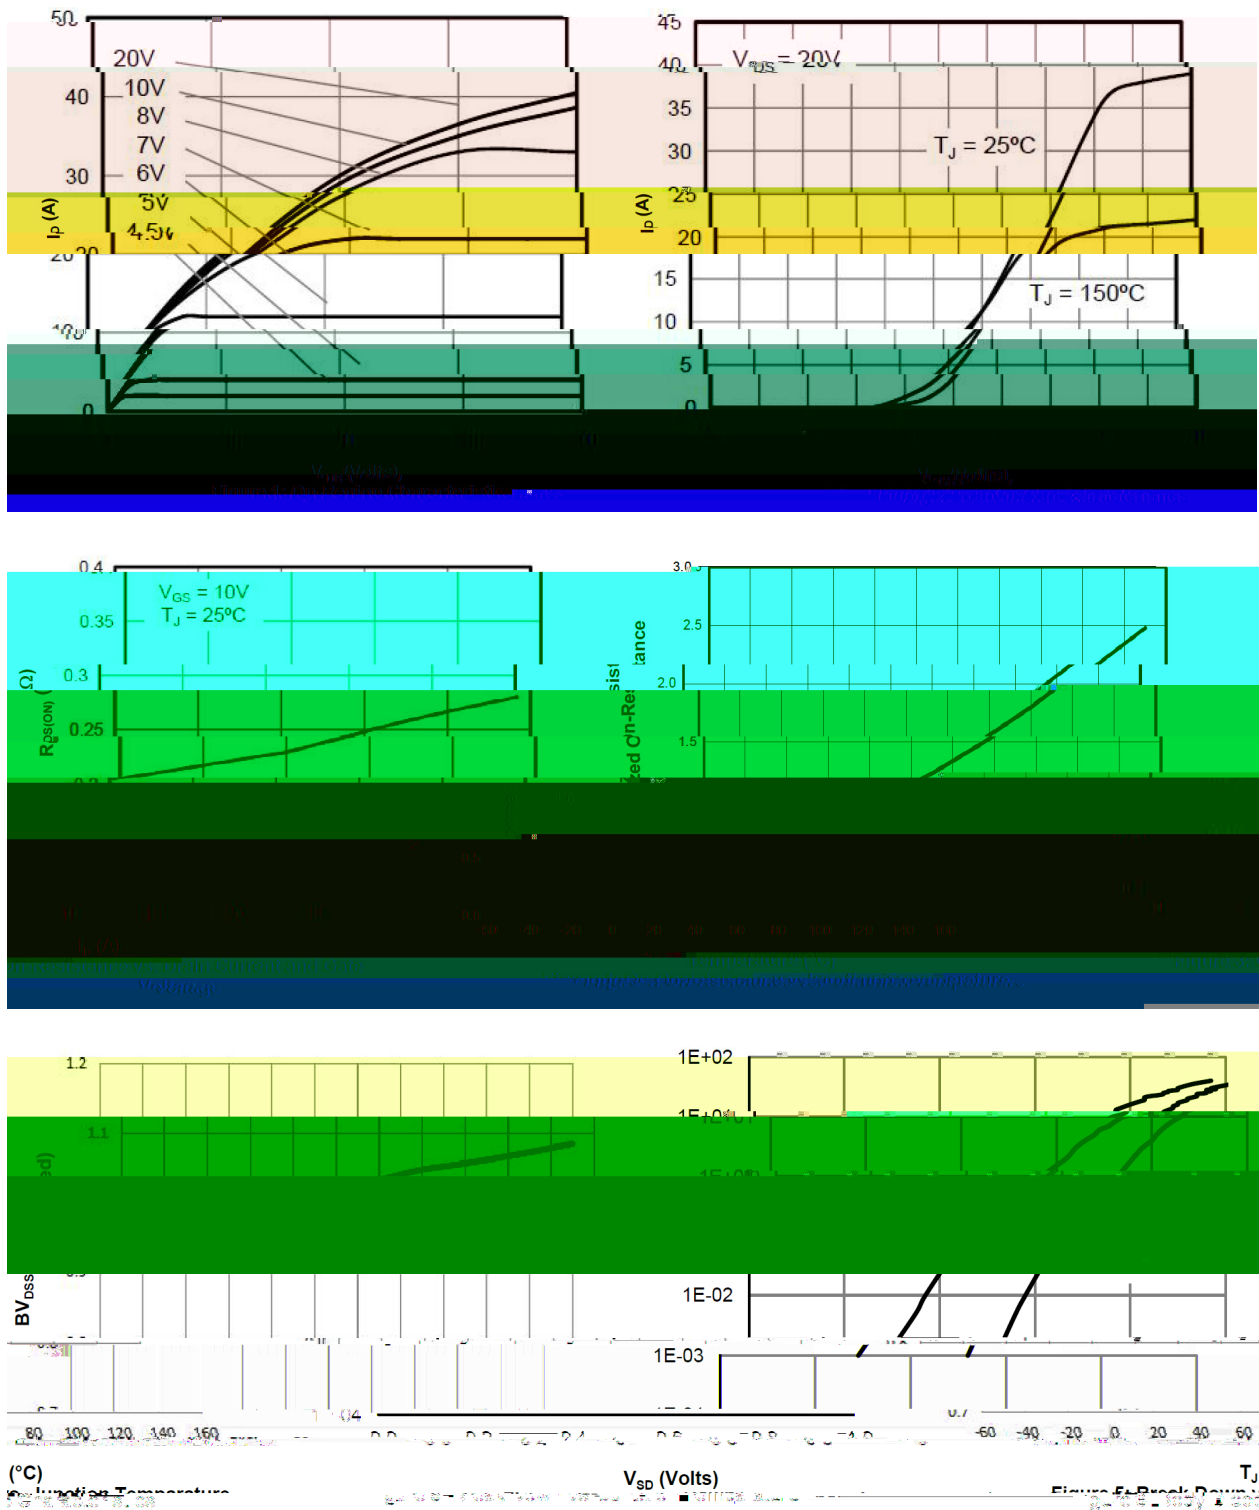

/ Electrical Characteristic Curve

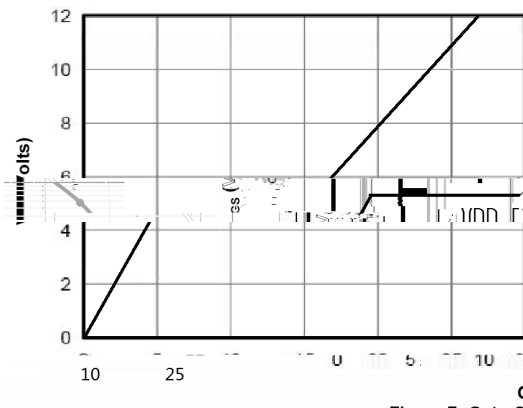


Figure 7: Gate-Charge Characteristics

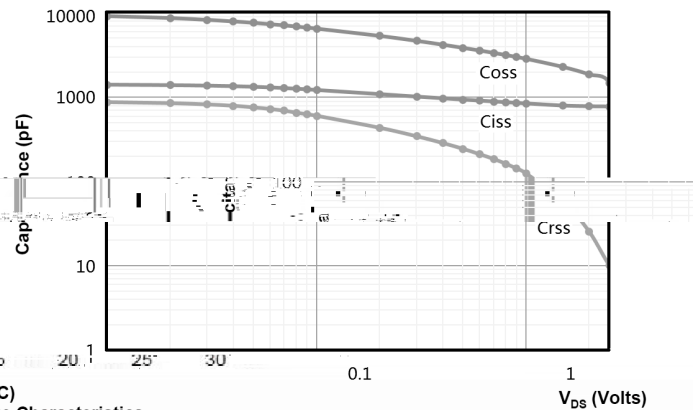


Figure 8: Capacitance Charac

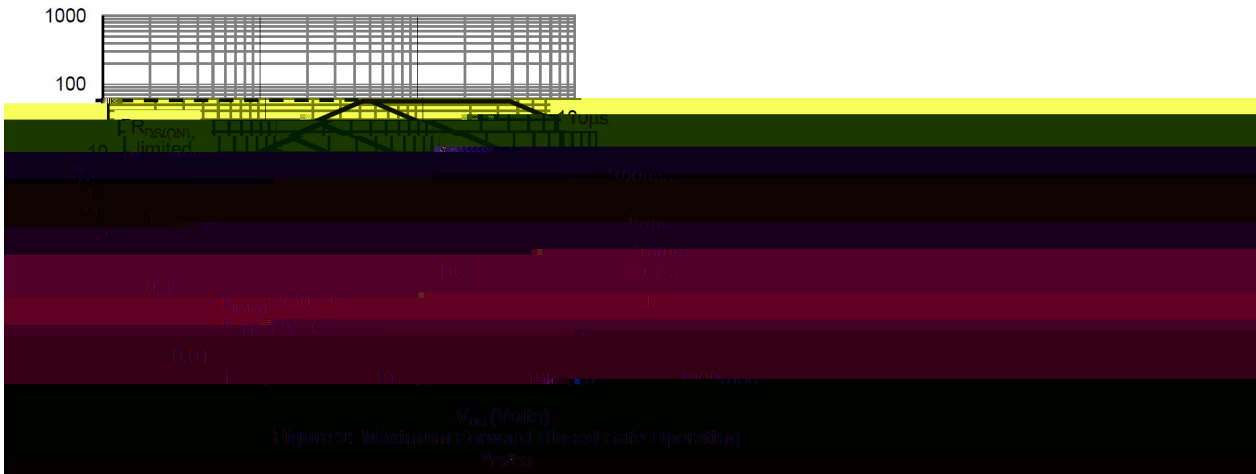


Figure 9: Maximum Forward Biased Safe Operating


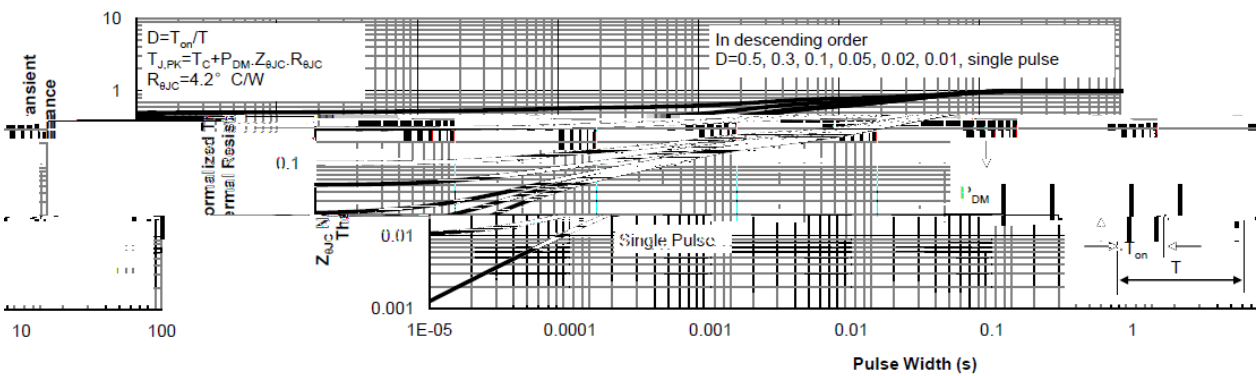


Figure 10: Normalized Maximum Transient Thermal Impedance


BRFL65R280T

/ Marking Instructions

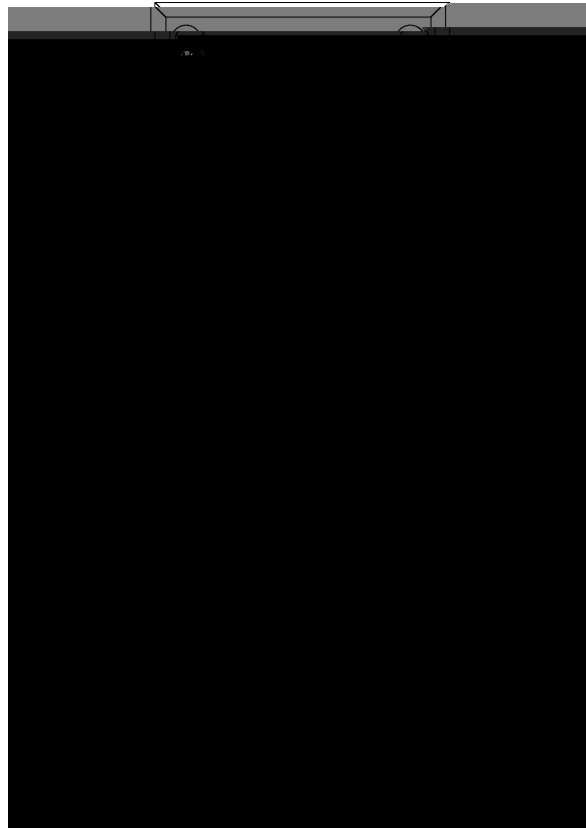

65R280T

() / Temperature Profile for Dip Soldering(Pb-Free)

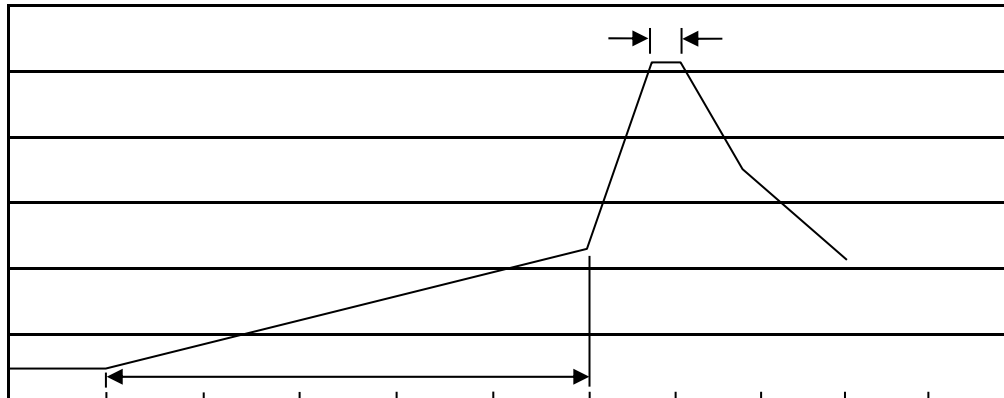 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices