



			℃
			℃
		~	℃



		℃				
		℃				
	()	℃				

:



FIG.1-FORWARD CURRENT DERATING CURVE

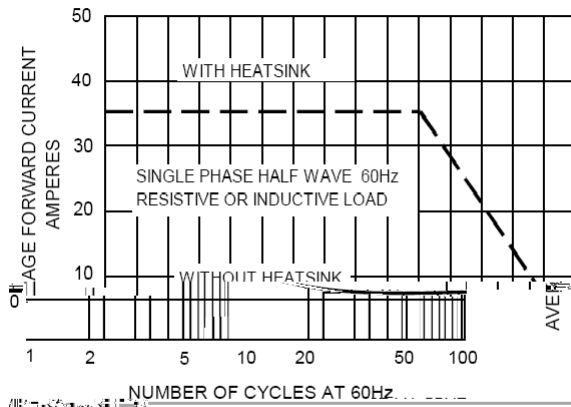


FIG.2-MAXMUN NON-REPETITIVE SURGE CURRENT

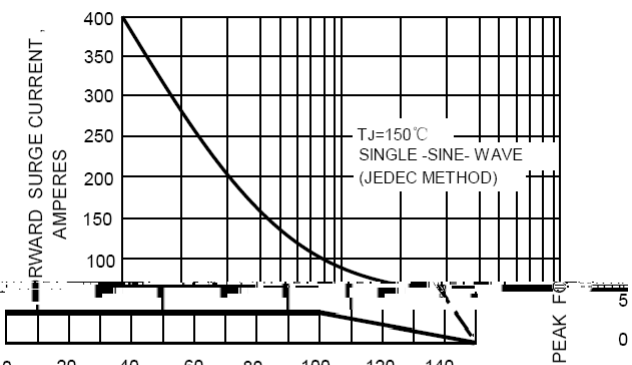


FIG.3-TYPICAL REVERSE CHARACTERISTICS




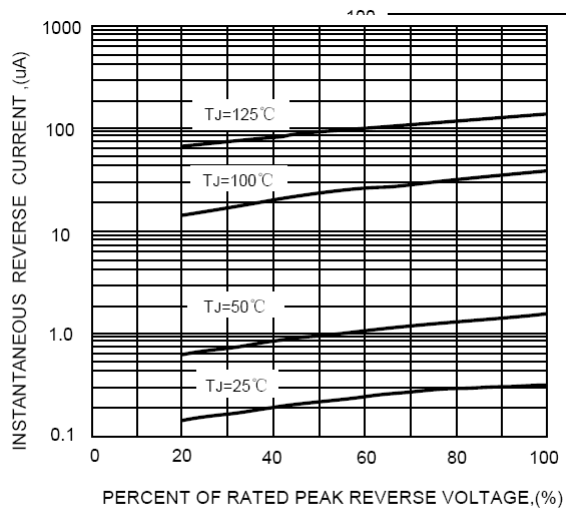



FIG.4-TYPICAL FORWARD CHARACTERISTICS

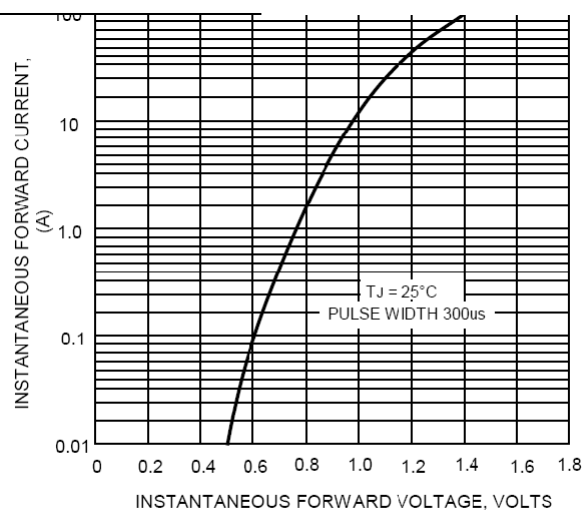

GBJ

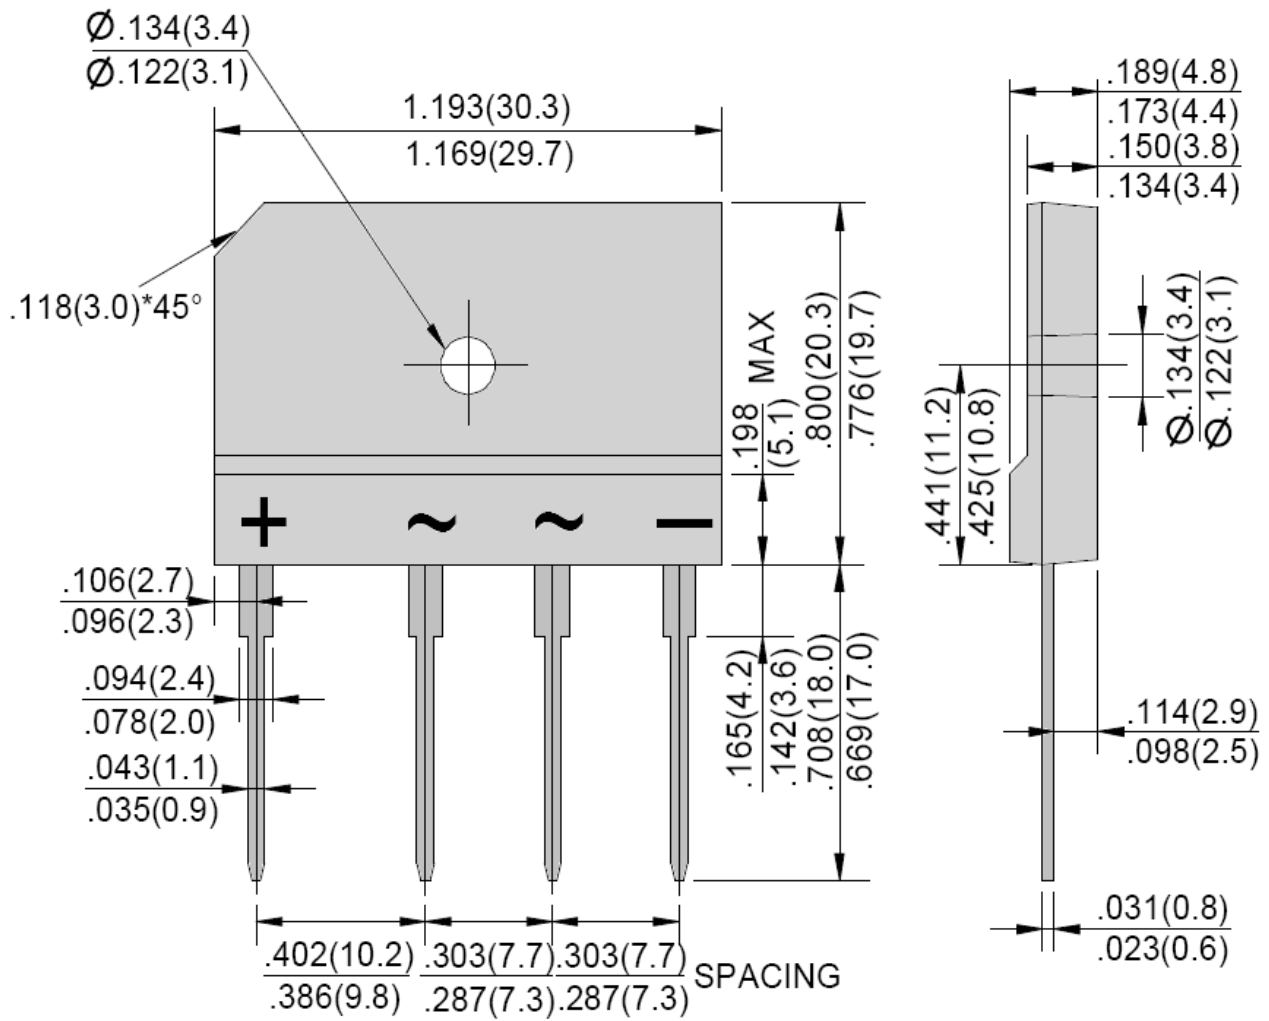

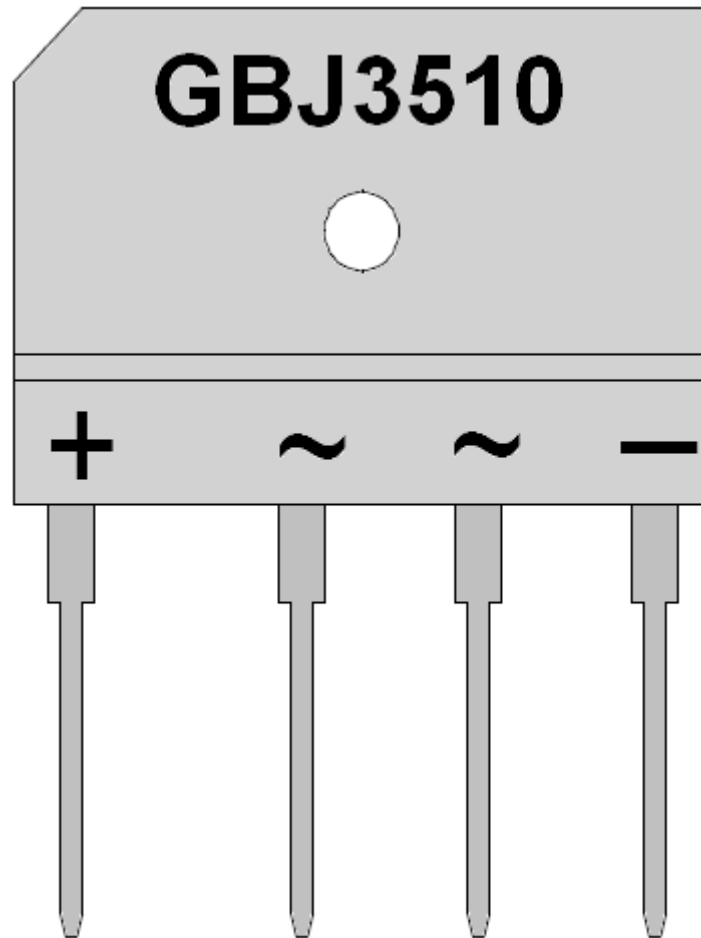

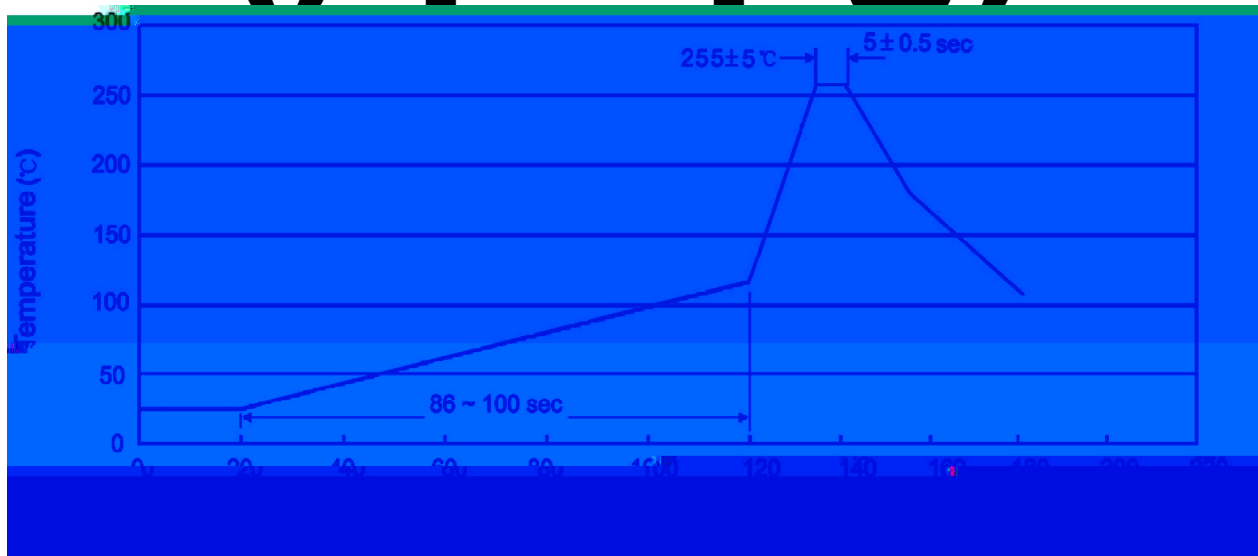

/ **Blue Rocket Electronics**

/ **Blue Rocket Electronics**

°C

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
GBJ	-	-	250	8	2000	-	315×135×48	330×285×215

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /		Inner Box	Outer Box
GBJ	-	-	600	2	1200		500×190×105	525×210×245