


/ Descriptions

/ Features


/ Applications

DC/DC

/ Equivalent Circuit






/ Pinning

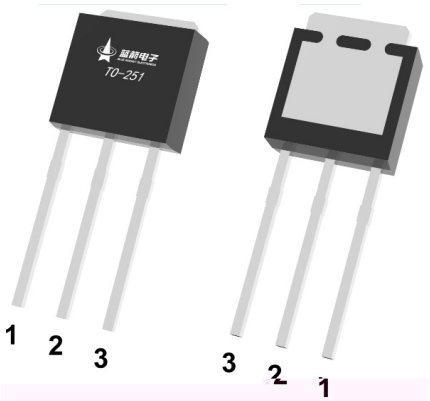

/ Marking


/ Package Dimensions

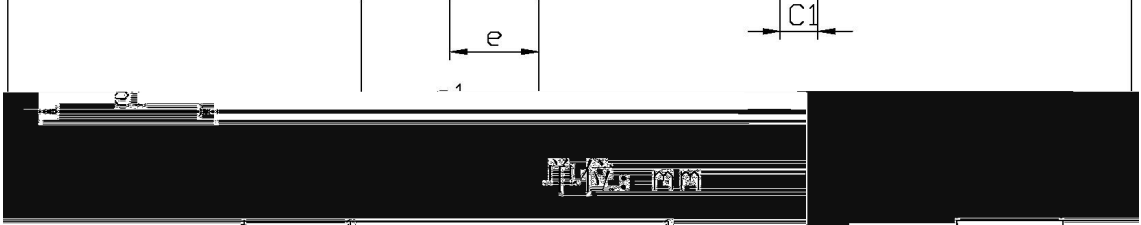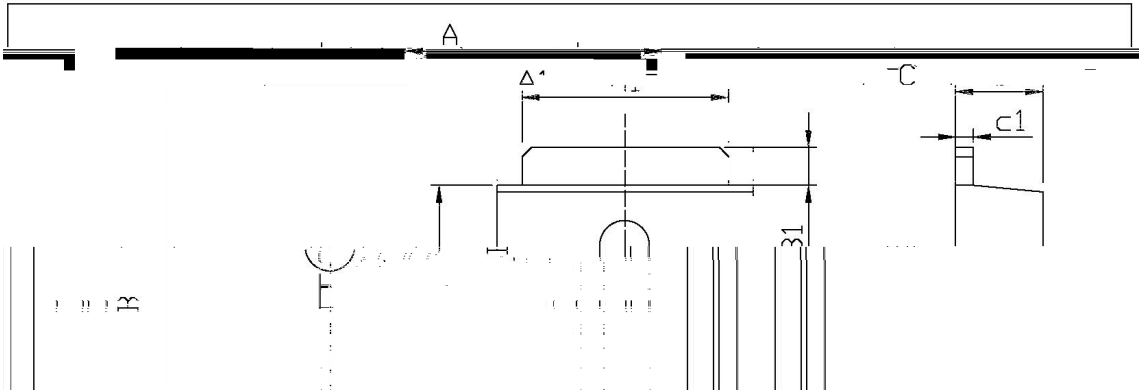

Dimensions in: Metric			Dimensions in: Imperial		
Symbol	Min.	Max.	Symbol	Min.	Max.
A	5.40	6.40	A	0.213	0.252
A1	5.10	5.50	A1	0.201	0.217
B	5.95	6.25	B	0.234	0.248
B1	0.95	1.25	B1	0.037	0.050
C	2.20	2.40	C	0.087	0.095
C1	0.95	1.15	C1	0.037	0.045
e1	4.43	4.73	e1	0.174	0.186

TC-251


/ Marking Instructions

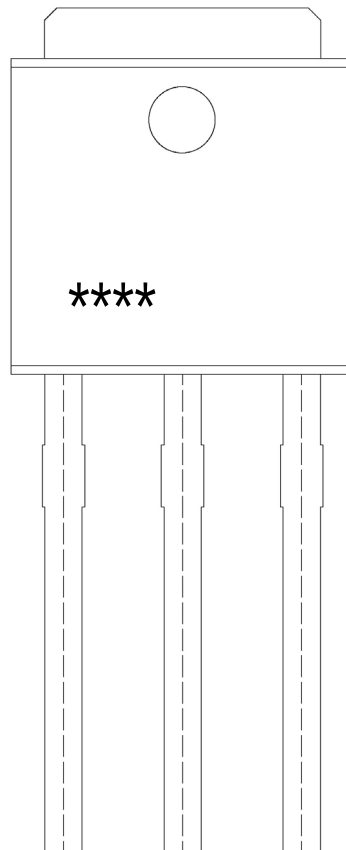

BR

740

() / Temperature Profile for Dip Soldering(Pb-Free)

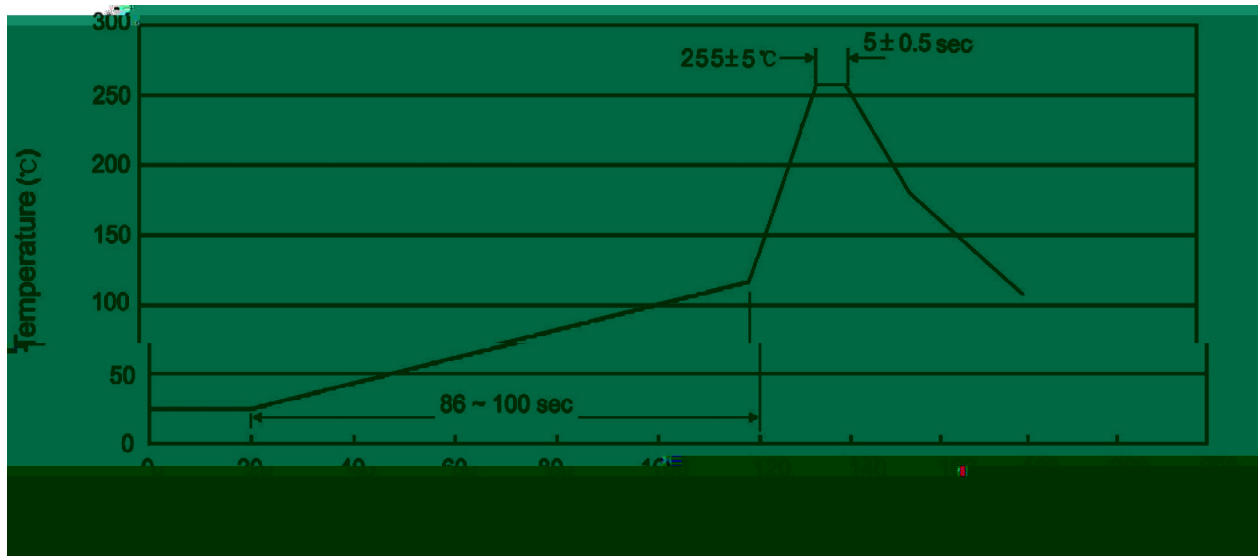 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
--	-----------	----------------	-----------------	-----------------------	-----------------	-----	-----------	-----------