


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

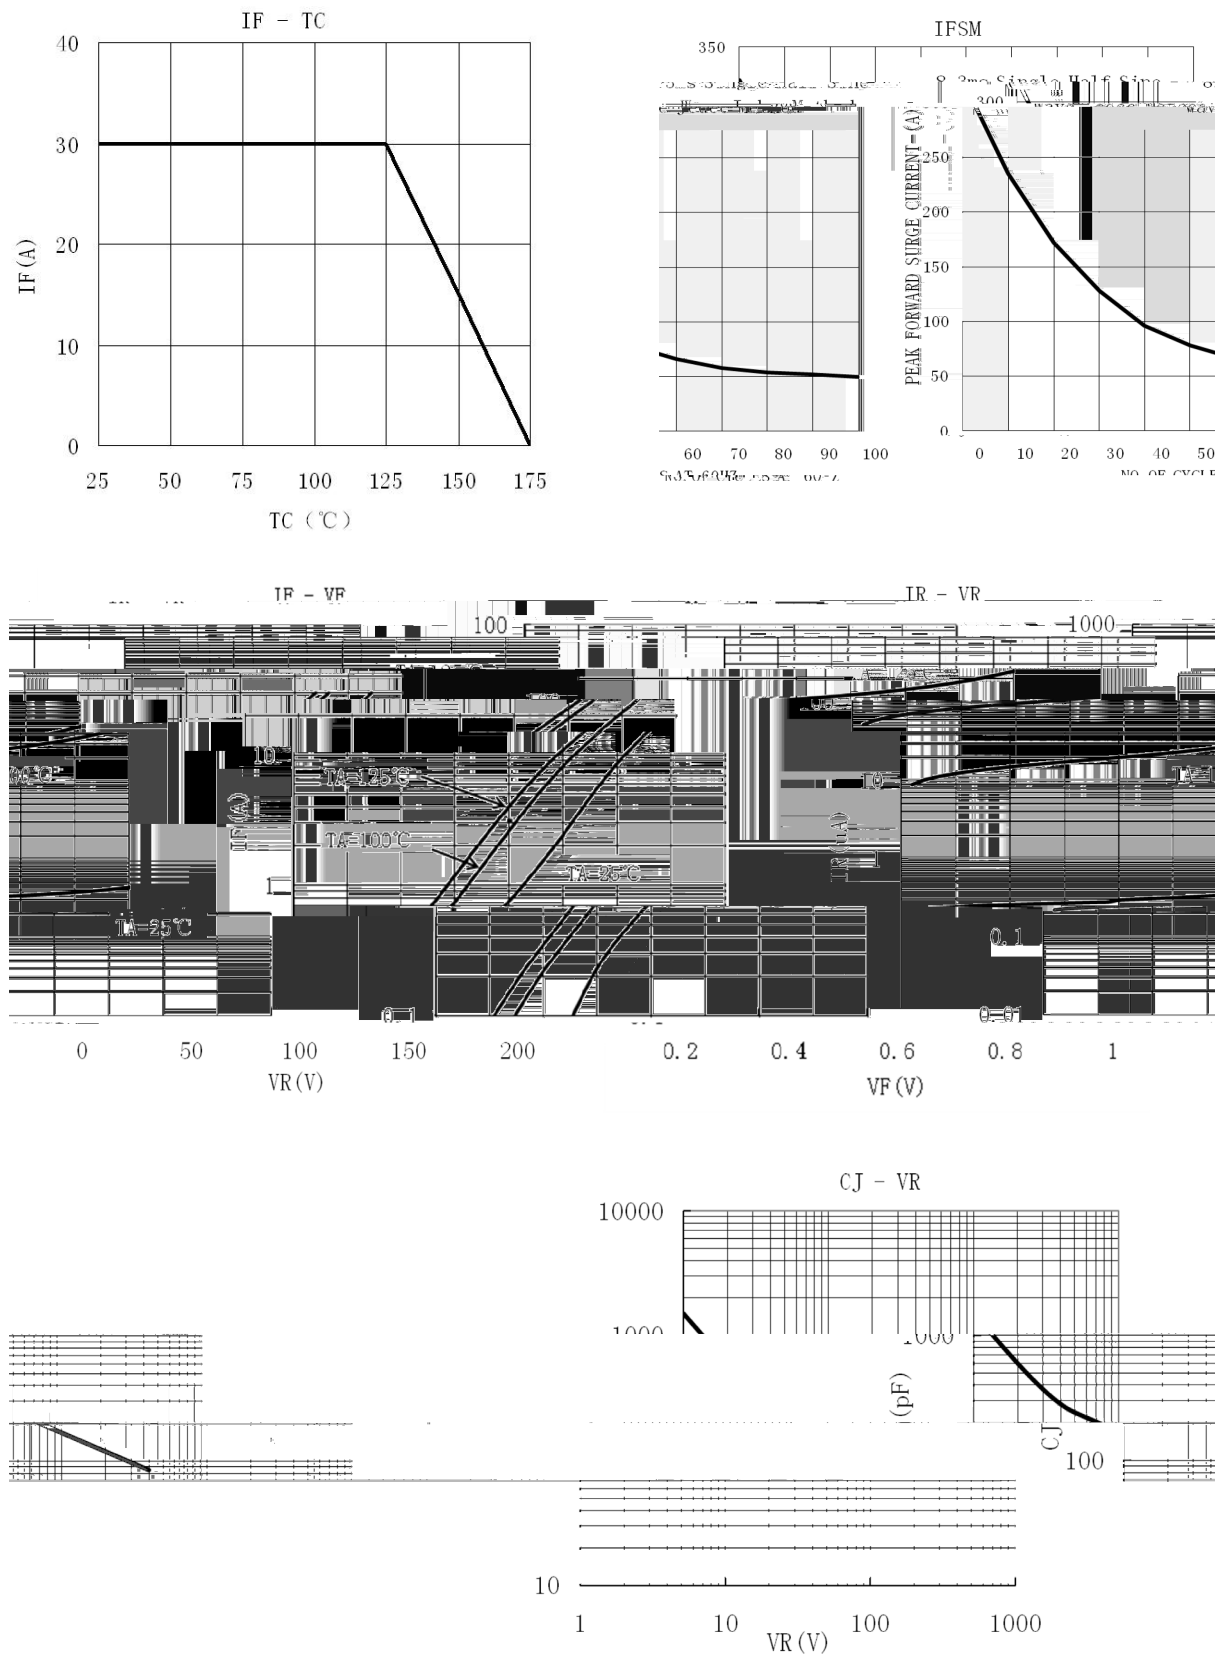

/ Package Dimensions


T0-220

单位: mm

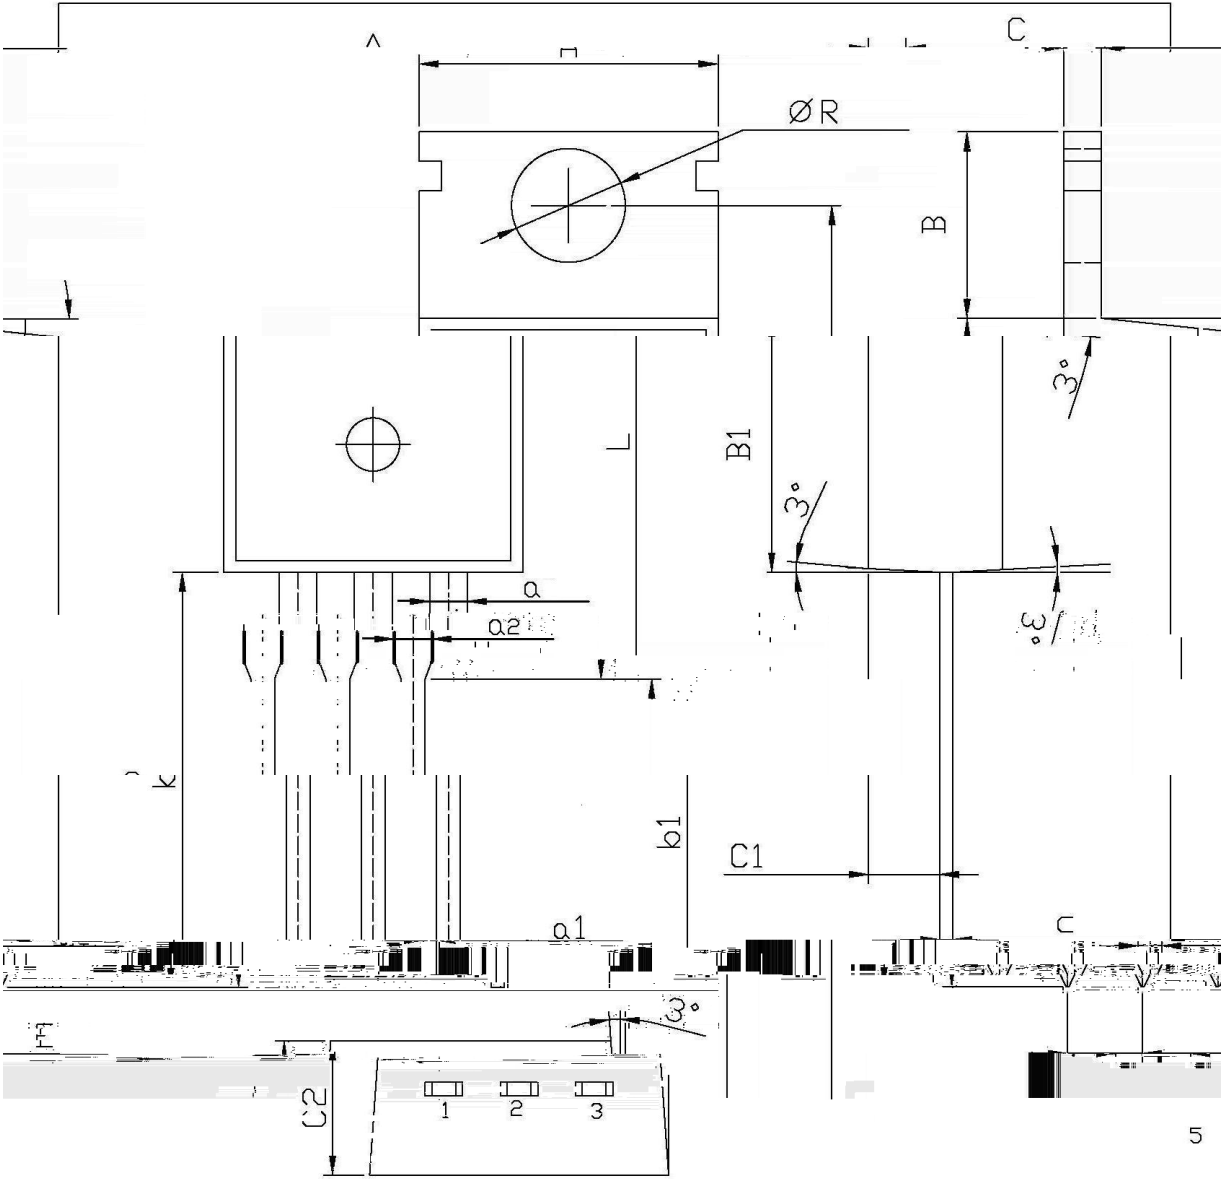


Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	B	6.3	6.7
R	3.56	3.64	B1	9.0	9.4
L	15.7	16.1	C1	2.2	2.6
b	12.6	13.6	a	1.22	1.32
a	0.4	0.6	F	2.34	2.74
a2	4.3	4.7	C2	0.2	1.25
b1			a1		1.45

/ Marking Instructions

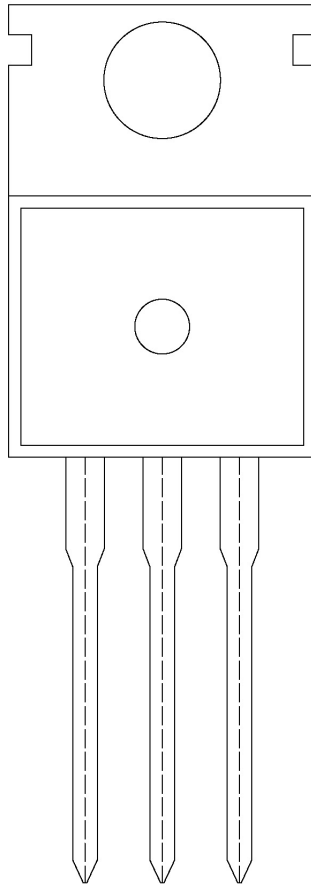

() / Temperature Profile for Dip Soldering(Pb-Free)

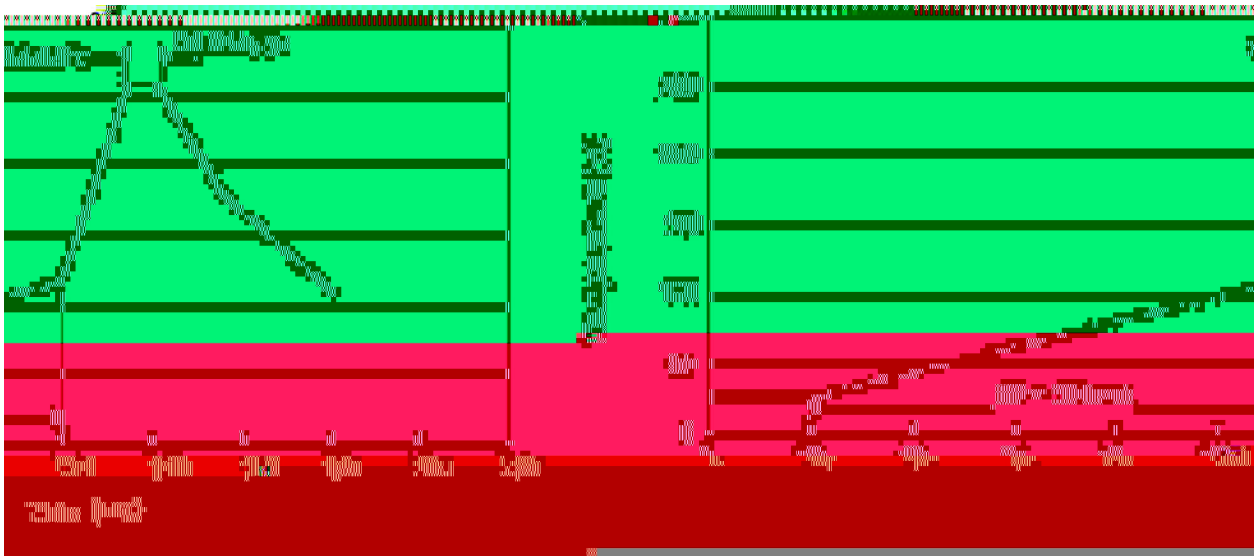

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只套管	套管盒	只盒	盒箱	只箱	套管	盒	箱

/ Notices