

5 é / Descriptions

.> / / xJ´ f â'ož


α a / Features

Ä x ž å Š k • ĵ è — < k × 5 « ^ y ò - v i k —) í D } ož


Đ ÷ / Applications

9 • ¼ 0 • μ è Y C Ü è ož

Ã W] Ô · / Equivalent Circuit



• Ũ - æ / Pinning

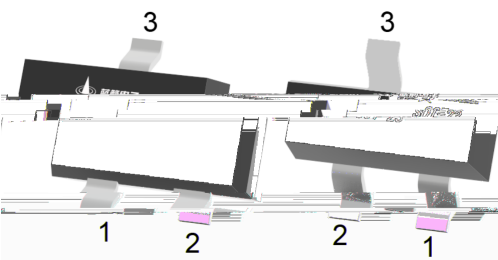

y y y

Z Ü B , M V / hFE Classifications & Marking

--	--


Absolute Maximum Ratings(Ta=25 ;)

@ f	... Z	f >	% y

Electrical Characteristics(Ta=25 ;)

@ f	... Z	y i Ú ^	Â 4 >	Á ° >	Â Ý >	% y


Electrical Characteristic Curve

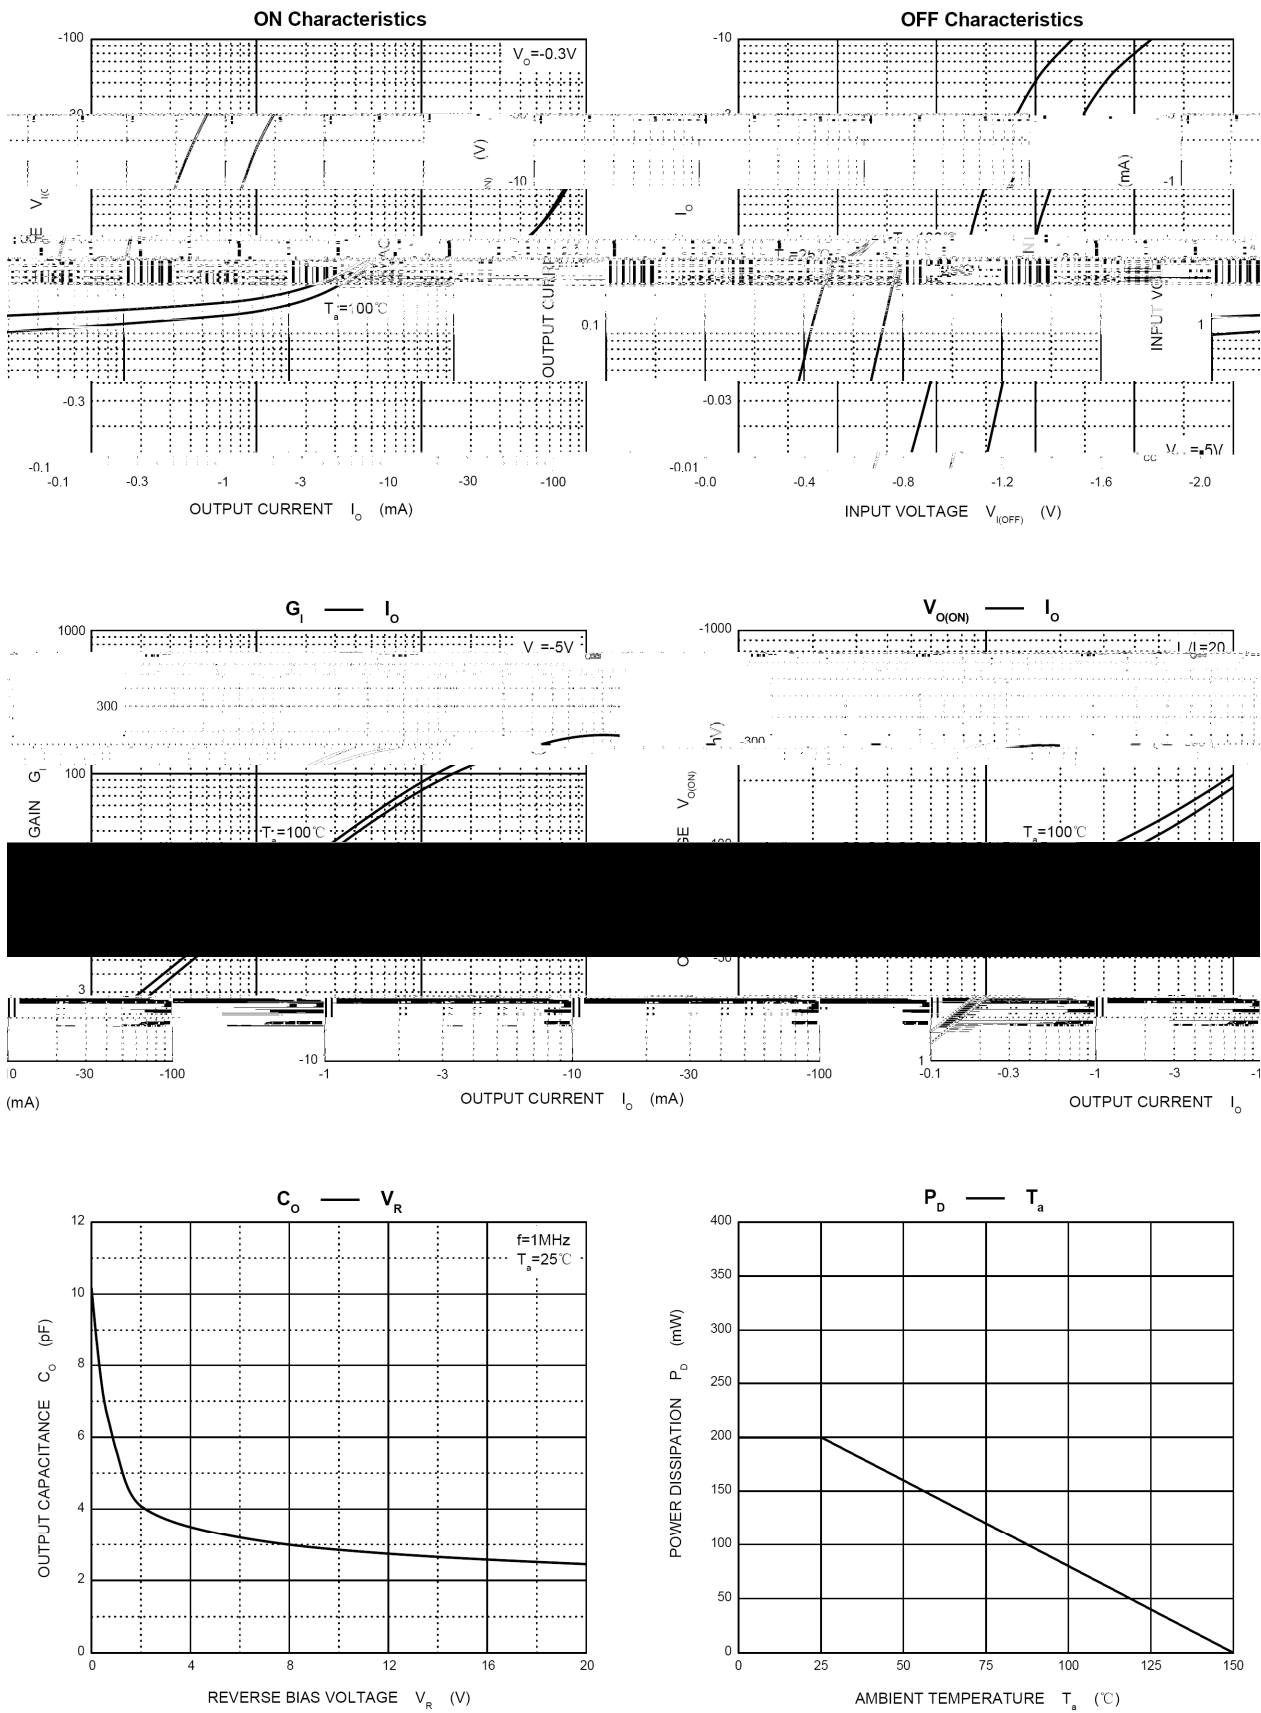


Ø □ =) ♂ / Package Dimensions

SOT-23

单位：mm

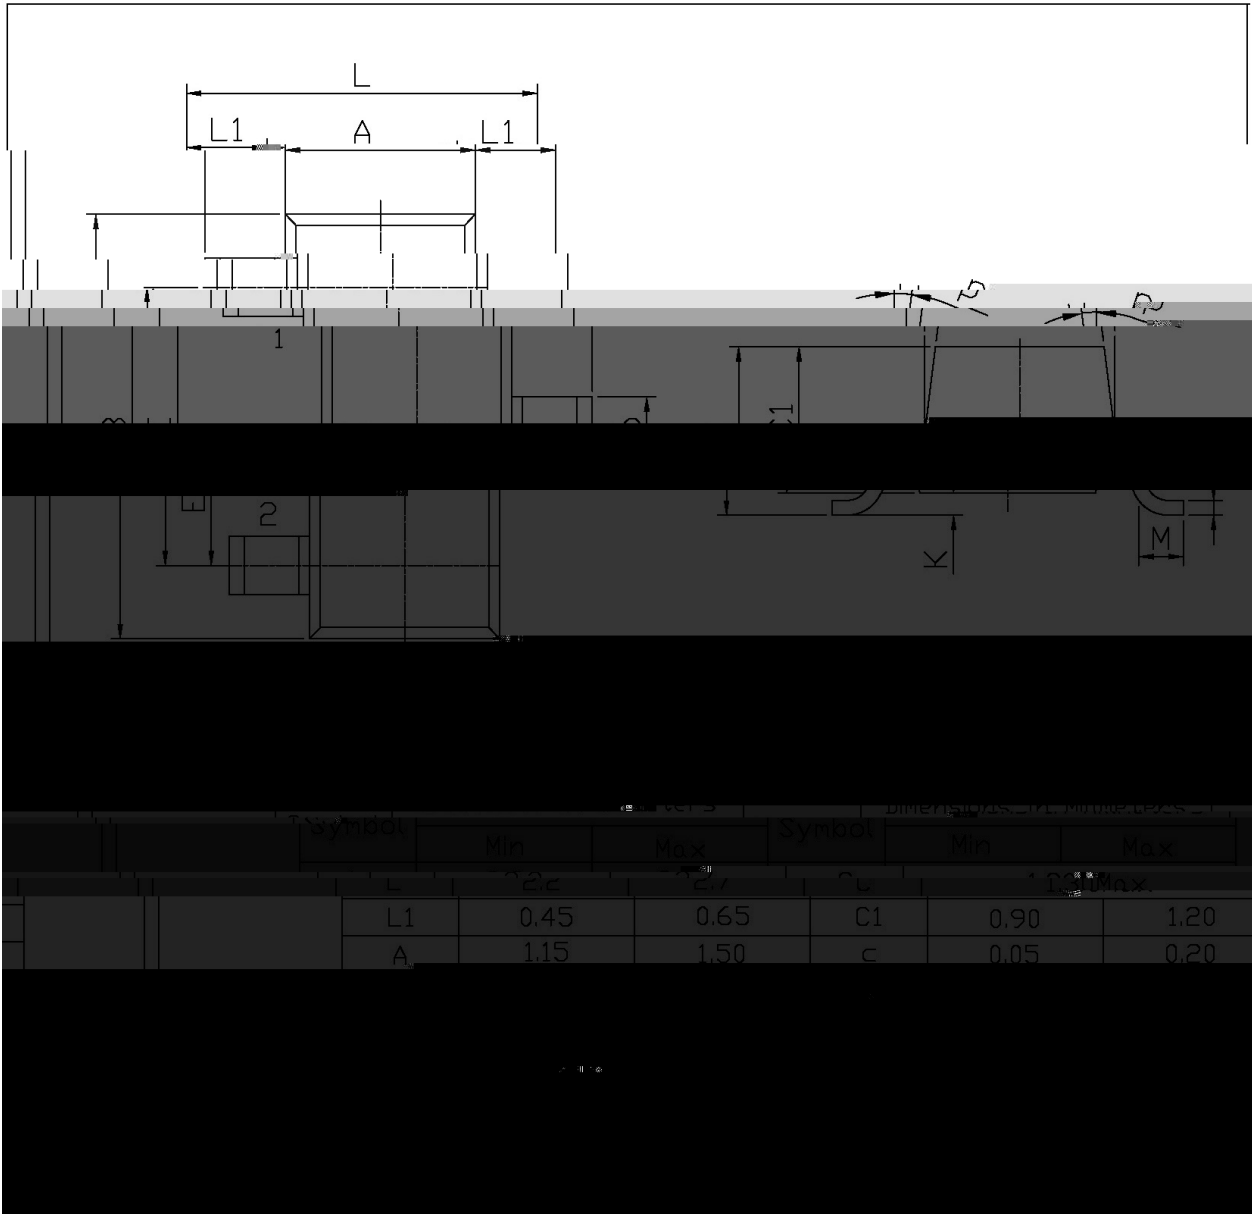


, M y f / Marking Instructions

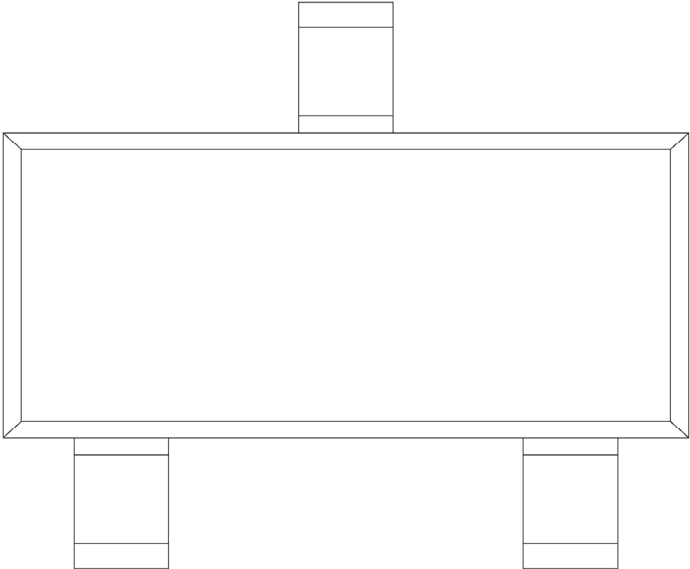

^a ϕ y
. y , [W A
y ° Z W A

. y
y

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

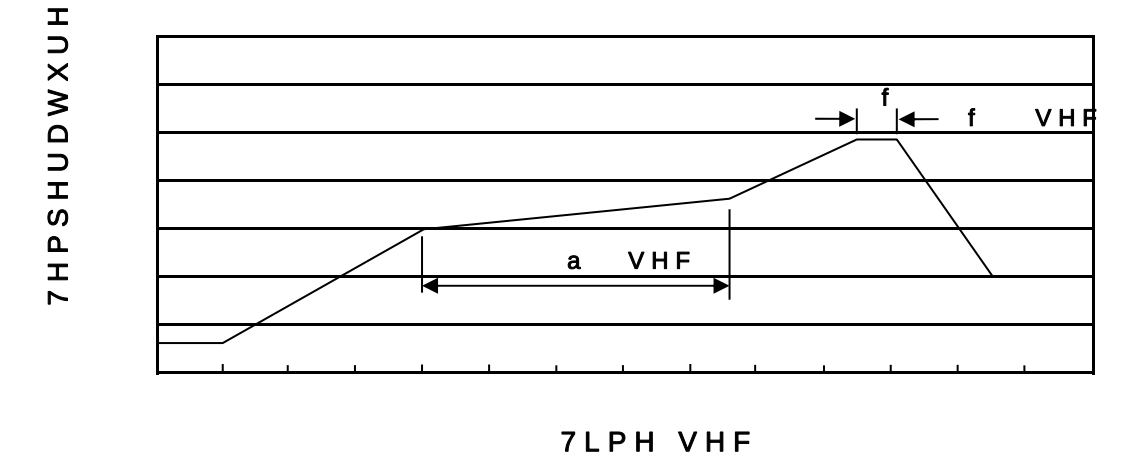

a ç y

o•Ä ½ “† ½ - k ž • ½ -

o•Q > “† r - k ž • 4 Ò r r - r

o•D N ò i Ò 0 ,† ½ - -

ÂÐ /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

“† y r - ž • y r

G P á / Packaging SPEC.

2 & x

7>û ~ E	;û H					;û p . Æ		
	Units/Reel / --	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
						T		

„Ð y f / Notices