


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ
						μ
						μ

204B INPUT I_{B1} OUTPUT

I_{B1} I_{B2} I_{B2} 204B



- I_{B1} = I_{B2} = 0.05mA

DUTY CYCLE ≤ 1% V_{CC} = -30V

开关时间测试电路

/ Electrical Characteristic Curve


STATIC CHARACTERISTICS

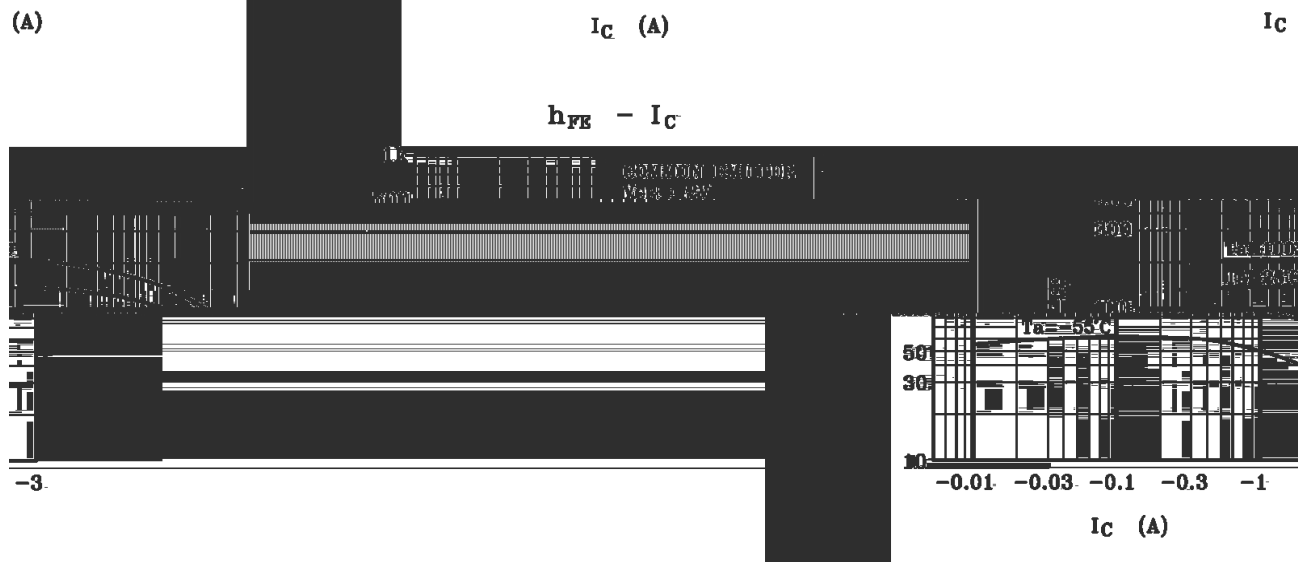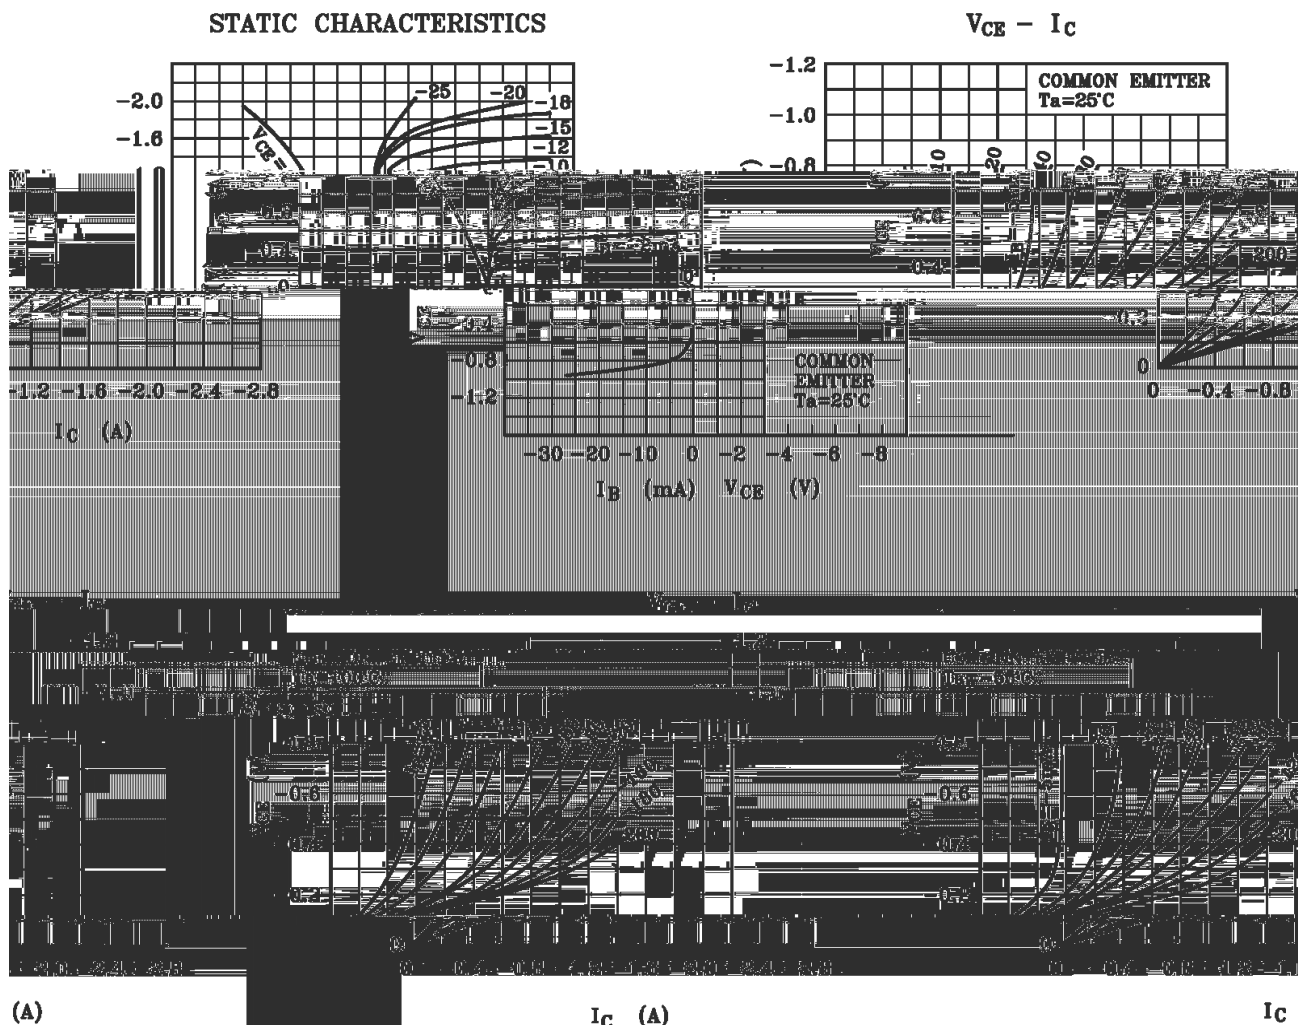


/ Package Dimensions

T0-92LM

Unit: mm

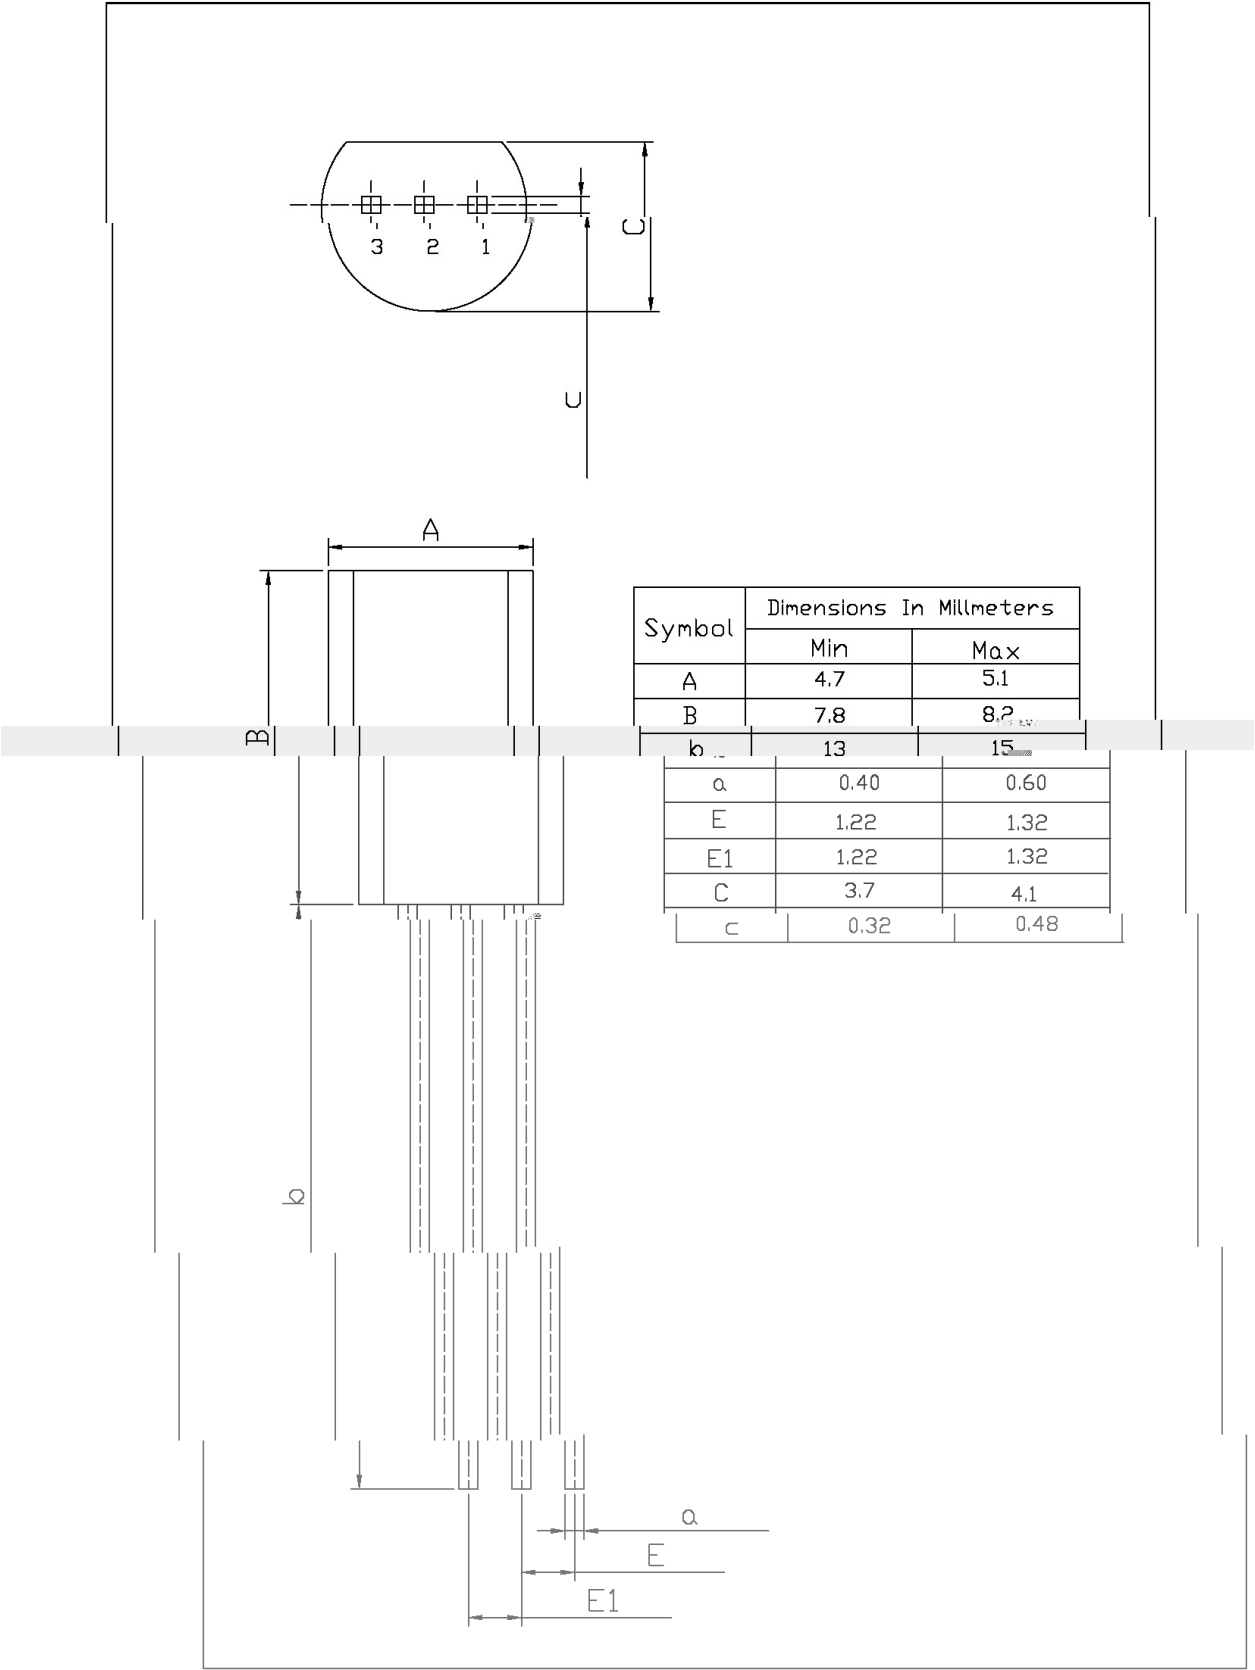

/ Marking Instructions

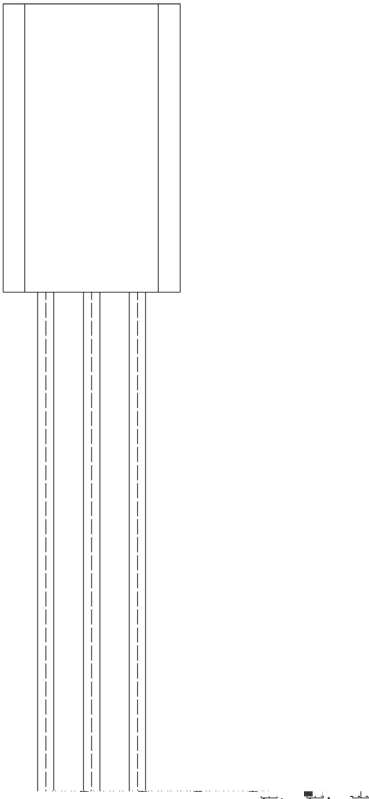

() / Temperature Profile for Dip Soldering(Pb-Free)



/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸 :	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 大箱

/ Notices