

/ Descriptions


SOT-89 PNP

/ Features


1W, KTC4375

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking


/ Absolute Maximum Ratings(Ta=25 –)

			℃
			℃

/ Electrical Characteristics(Ta=25 –)

						μ
						μ


/ Electrical Characteristic Curve

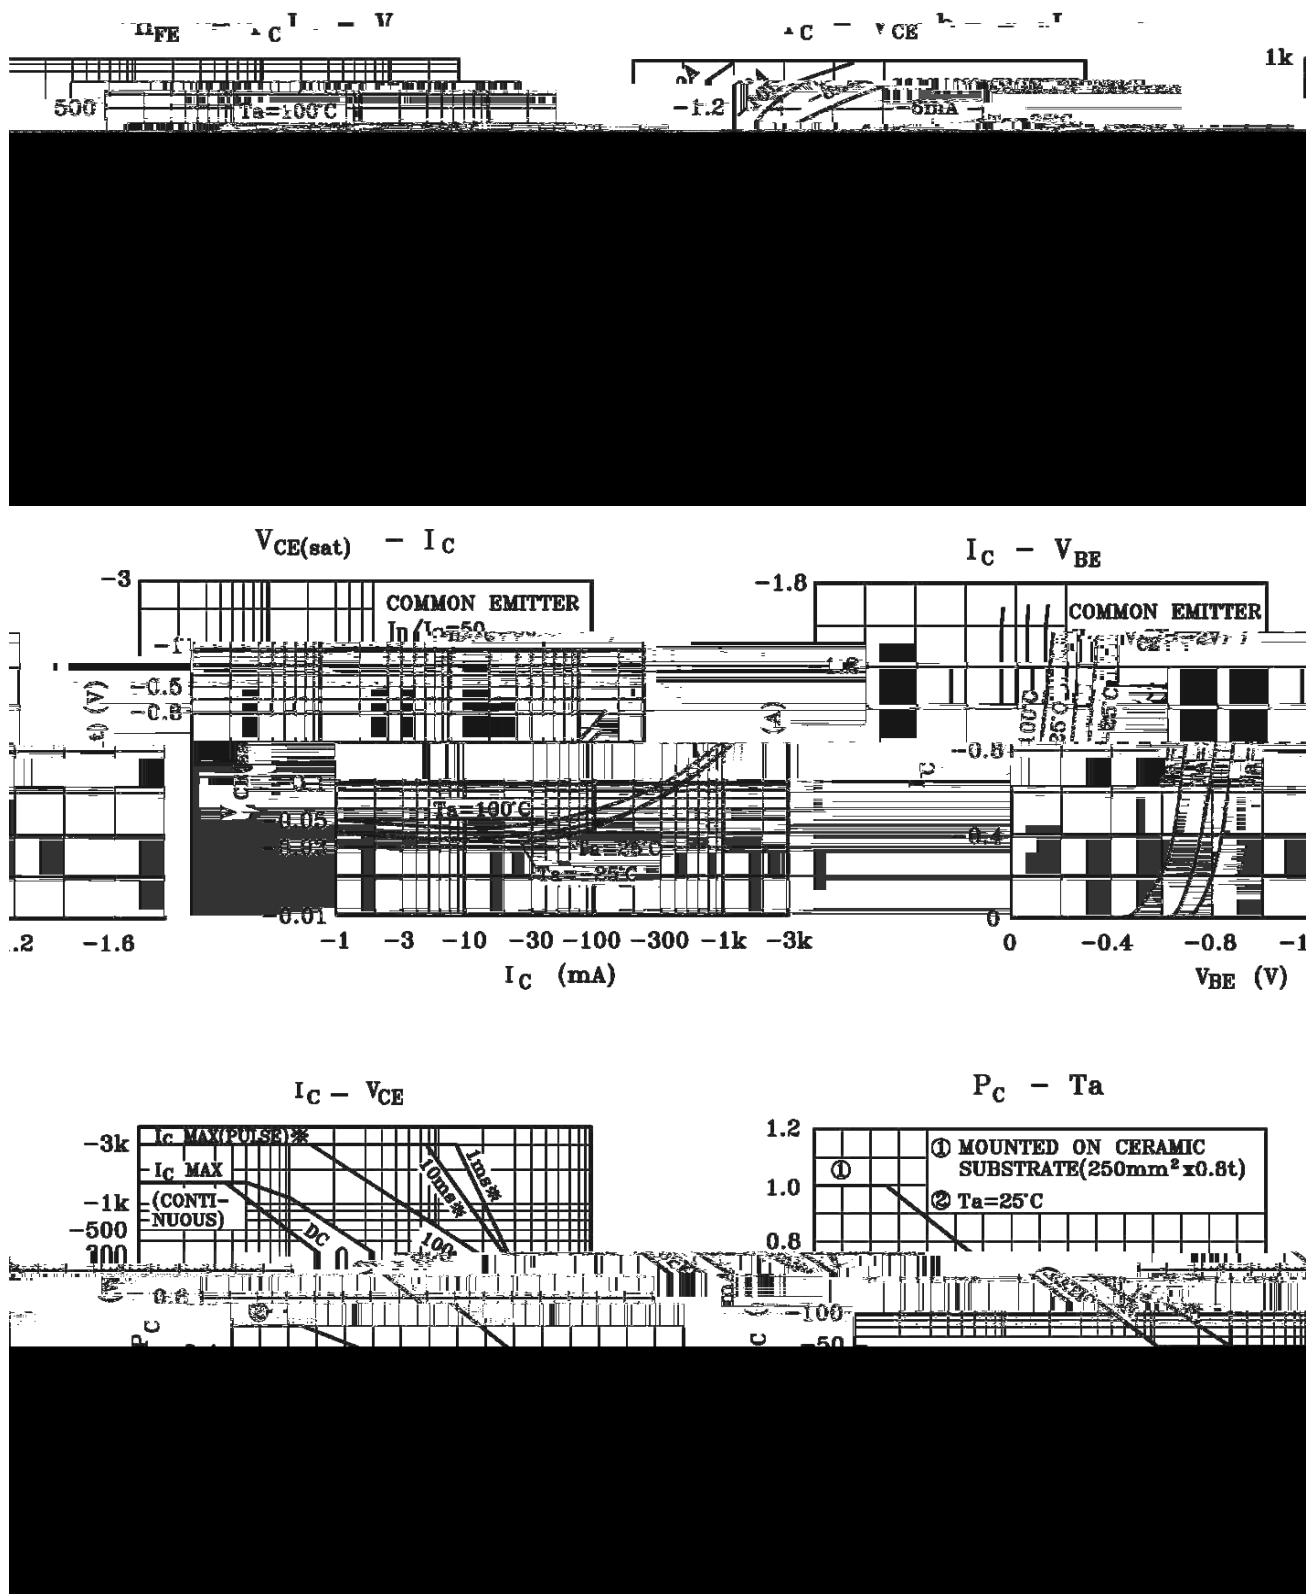


/ Package Dimensions

SOT-89

单位: mm

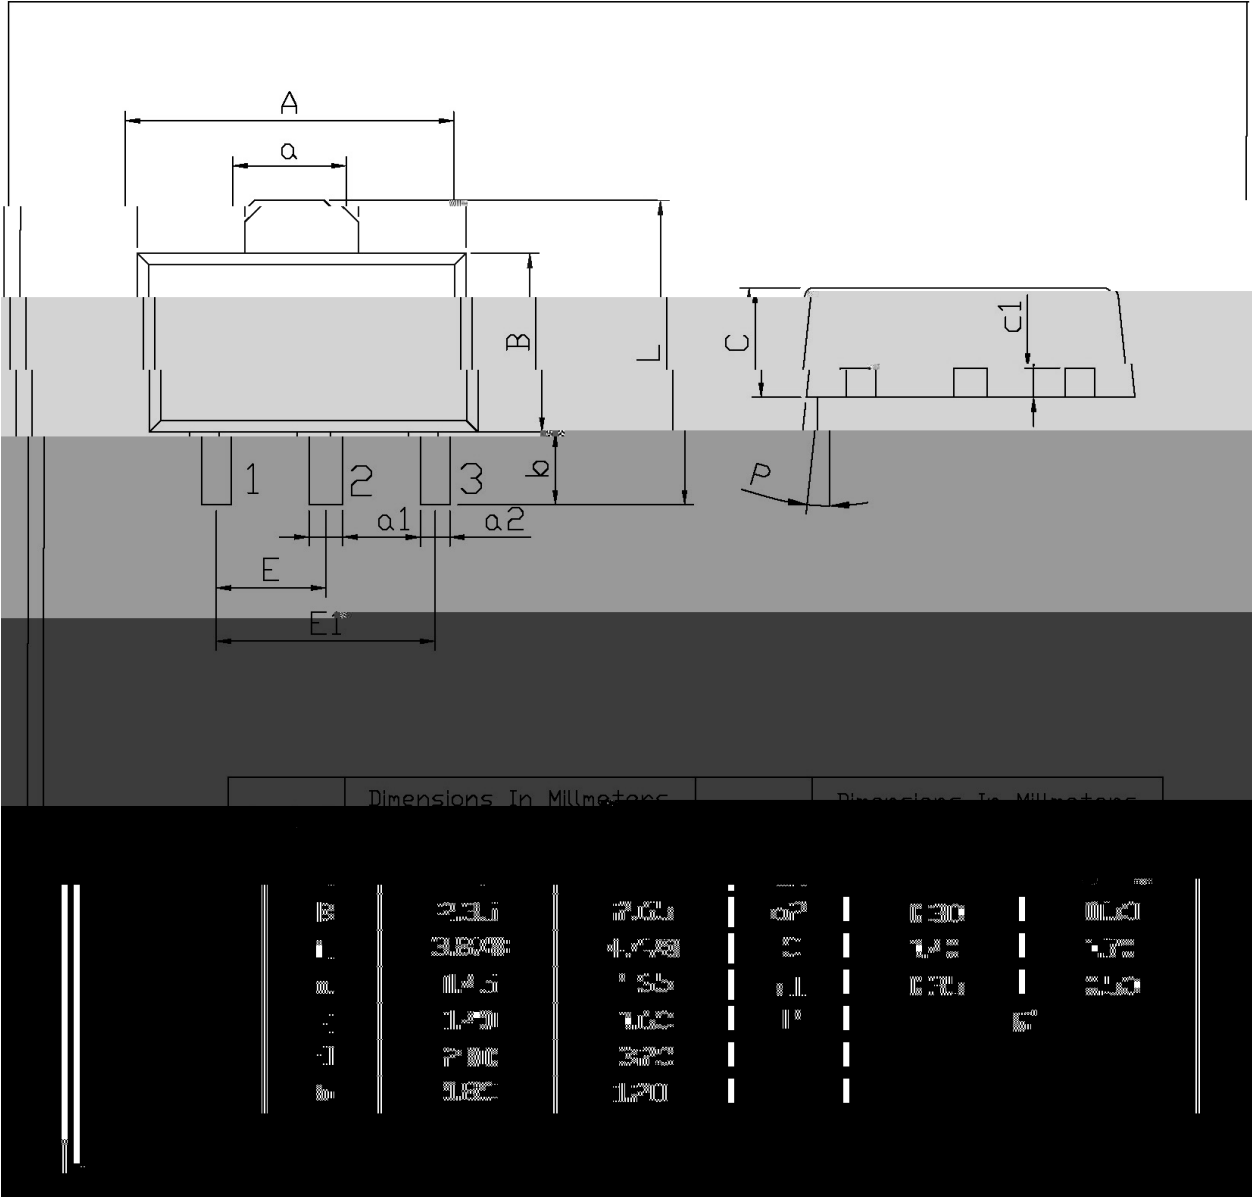


/ Marking Instructions

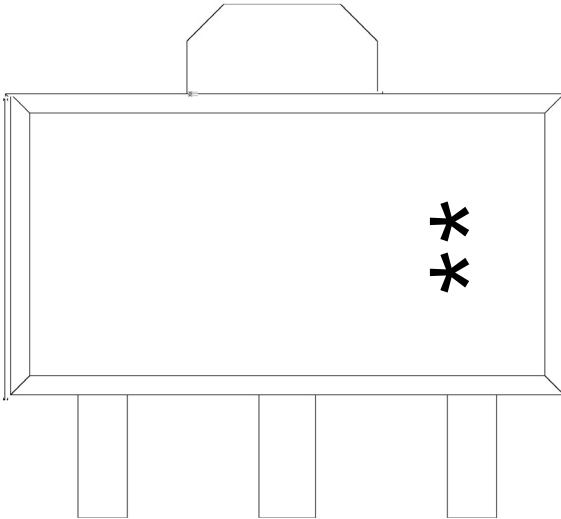

H
I
O: h_{FE}
**

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

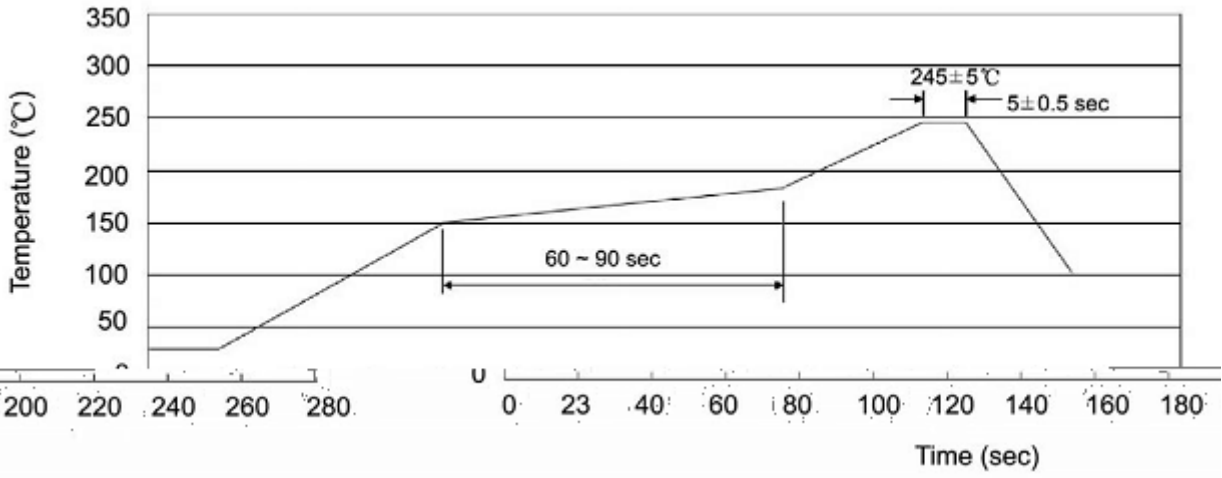

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices