


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

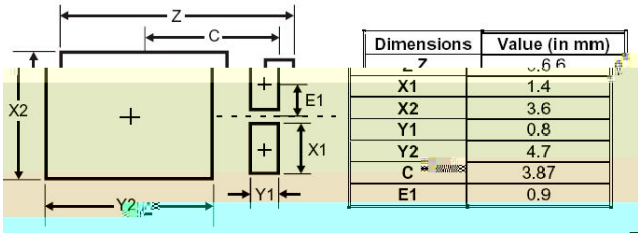

/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

		~	
	()		




/ Electrical Characteristics(Ta=25)

	()					


- / :
1. FR-4 PCB 2

2. /


/ Electrical Characteristic Curve

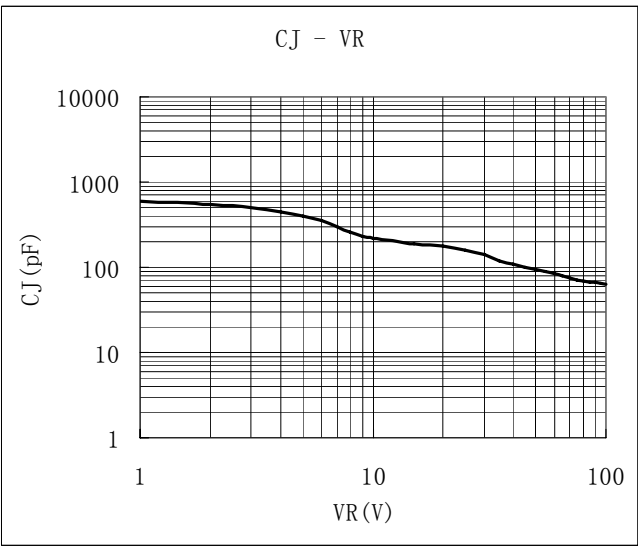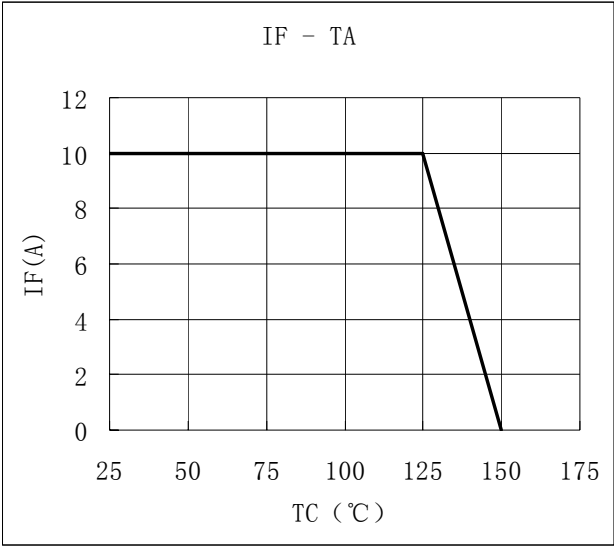

/ Package Dimensions

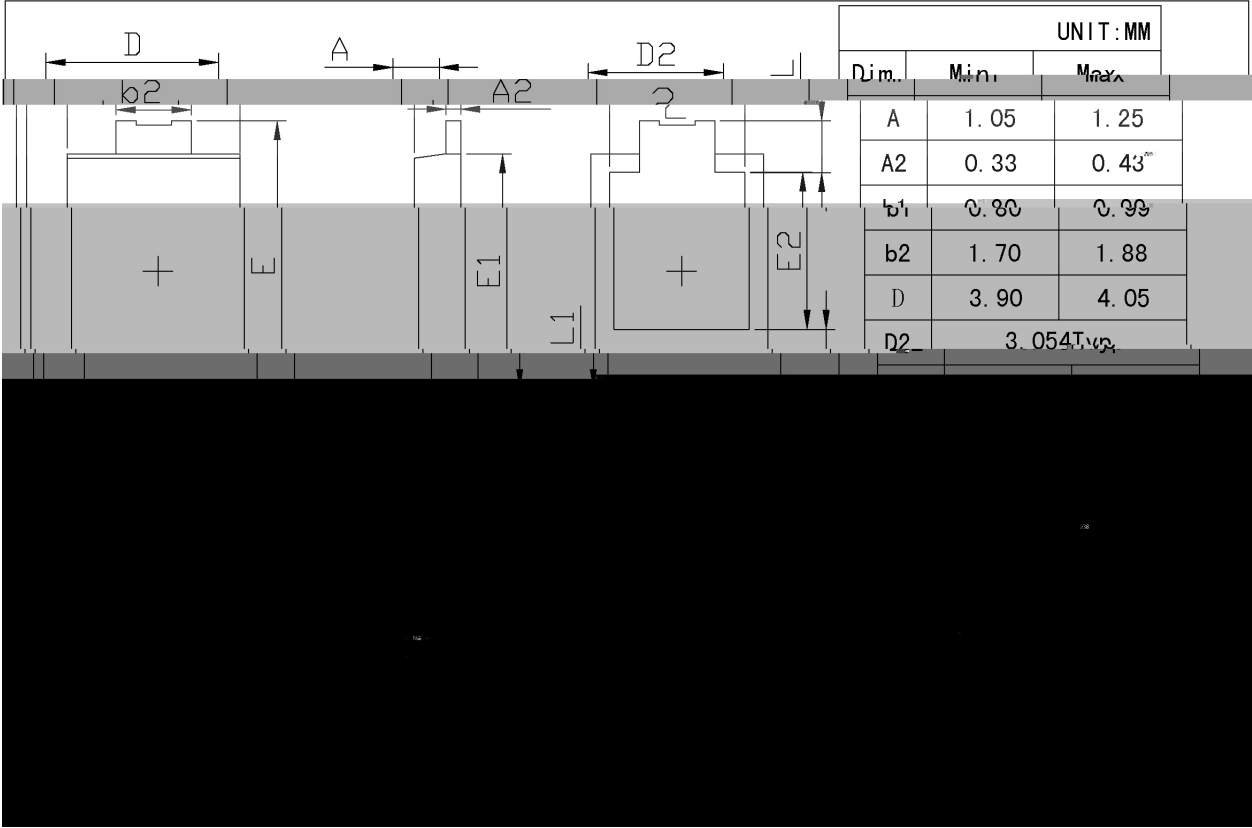

/ Marking Instructions

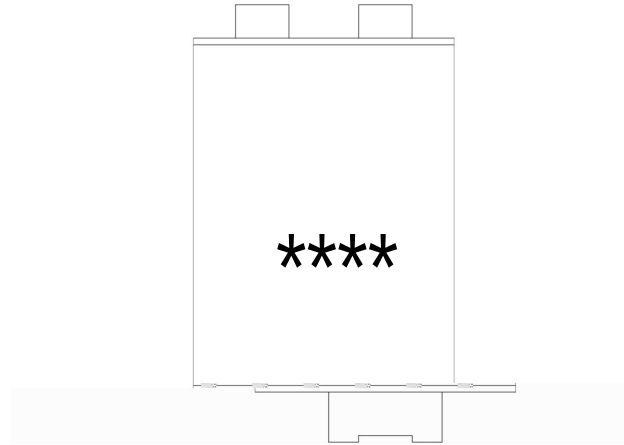

10100

10100

Figure 1 shows a schematic diagram of the experimental setup. A laser beam is directed at a sample, which is placed on a stage. A camera is positioned above the sample to capture images. The sample is labeled with $245 \pm 5 \text{ }^{\circ}\text{C}$ and $5 \pm 0.5 \text{ sec}$.

 $\pm$ $\pm$

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-277	5,000	3	15,000	6	90,000	13" ×12	360×360×50	380×335×366

6 6