

/ Descriptions

TO-252



Schottky Barrier Diode in a TO-252 Plastic Package.

/ Features

High Forward Surge Capability, Ultra Low Forward Voltage Drop, Excellent High Temperature Stability.

/ Applications

For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

/ Equivalent Circuit**/ Pinning**

PIN1 Anode PIN 2,4 Cathode PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_{RM}	150	V
RMS Reverse Voltage	$V_{R(RMS)}$	105	V
Average Forward Rectified Current	$I_{F(AV)}$	10	A
Peak Forward Surge Current	I_{FSM}	200	A
Typical Thermal Resistance Junction to Case	$R_{\theta Jc}$	6.5	°C/W
Junction Temperature Range	$T_{J\ MAX}$	150	°C
Storage Temperature Range	T_{stg}	-55 150	°C




/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_{BR}	$I_R=0.3mA$	150			V
Forward Voltage	V_F	$I_F=2A$ $T_J=25^{\circ}C$		0.57	0.60	V
		$I_F=2A$ $T_J=125^{\circ}C$		0.47	0.55	V
		$I_F=10A$ $T_J=25^{\circ}C$		0.81	0.85	V
		$I_F=10A$ $T_J=125^{\circ}C$		0.69	0.75	V
Instantaneous Reverse Current	I_R Note 1	$V_R=100V$ $T_J=25^{\circ}C$		5	50	uA
		$V_R=100V$ $T_J=100^{\circ}C$			10	mA
		$V_R=100V$ $T_J=125^{\circ}C$			20	mA


/Notes

1. /Short duration pulse test used to minimize self-heating effect.


/ Electrical Characteristic Curve

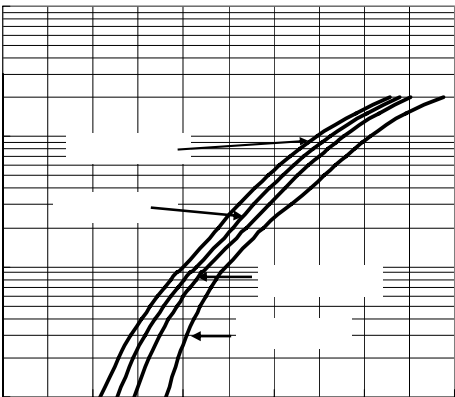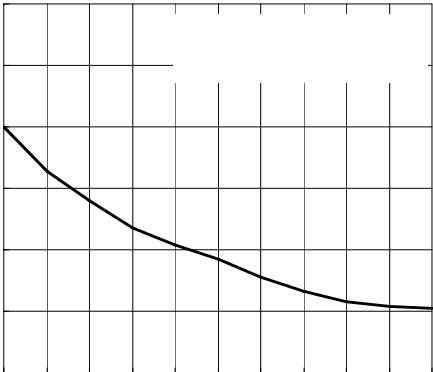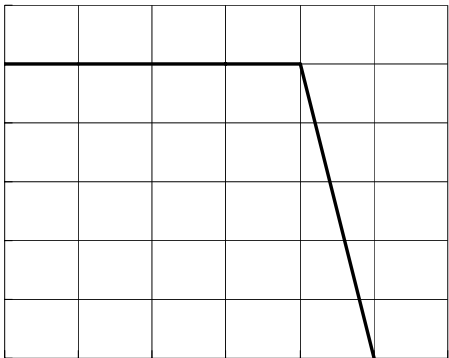

/ Package Dimensions

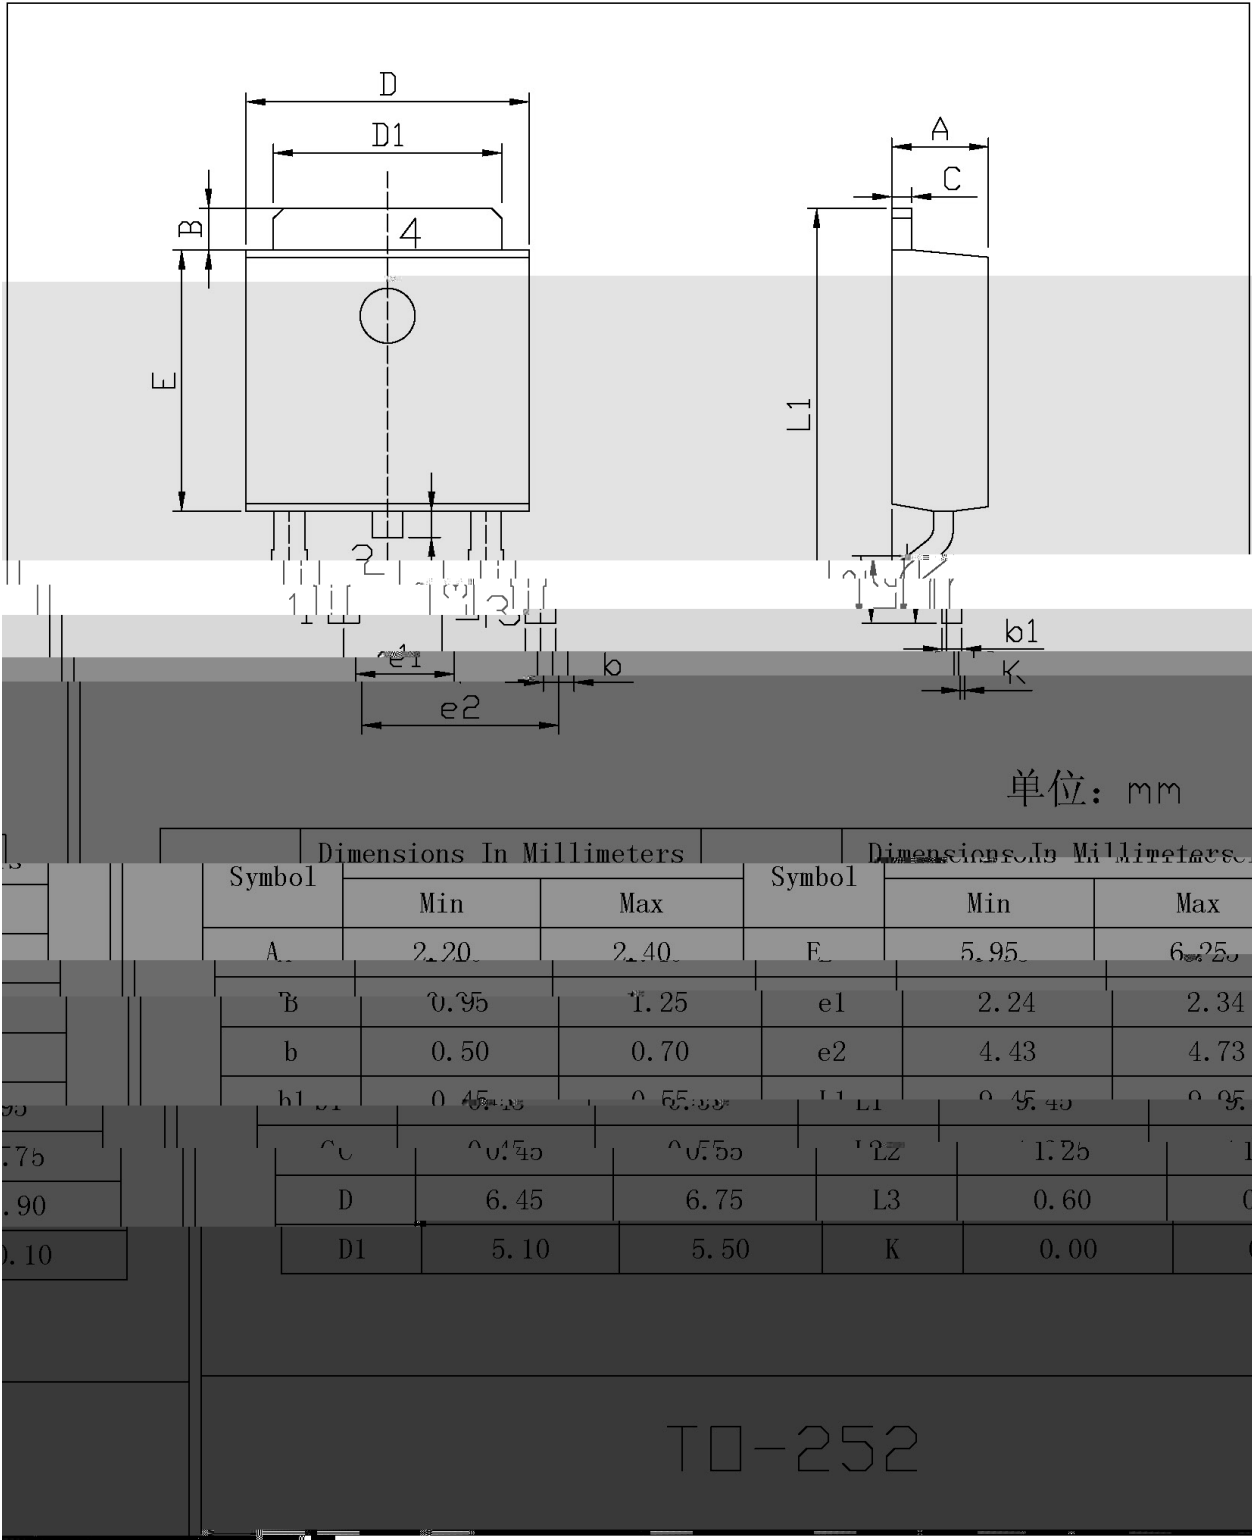

/ Marking Instructions

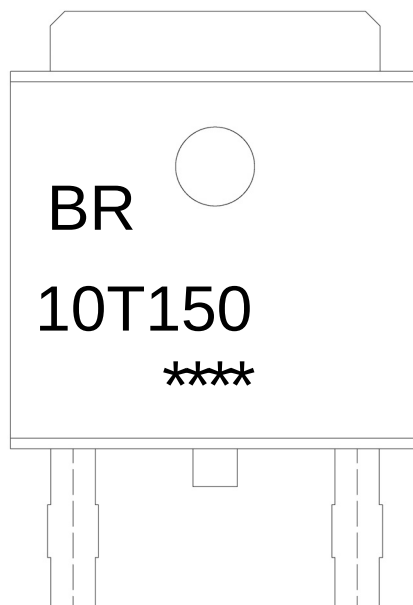

BR

10T150

Note:

BR:

Company Code


10T150

Product Type Code.

****:

Lot No. Code, code change with Lot No.

() /

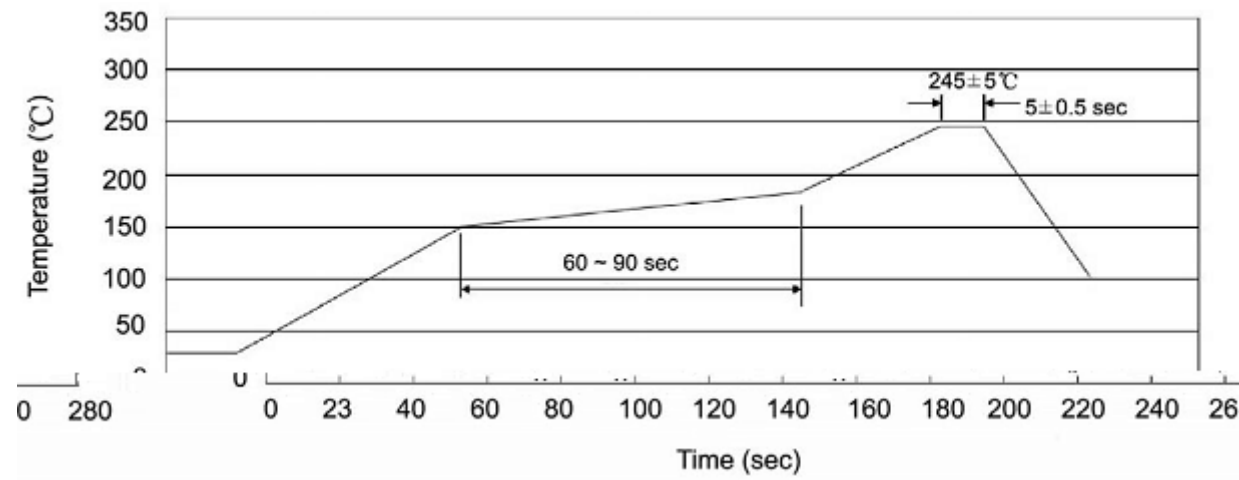

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	5	25,000	13 ×16	360×360×50	385×257×392