

LV30200CT

/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃

/ Electrical Characteristics(Ta=25)






	()					

:

。

。


/ Electrical Characteristic Curve

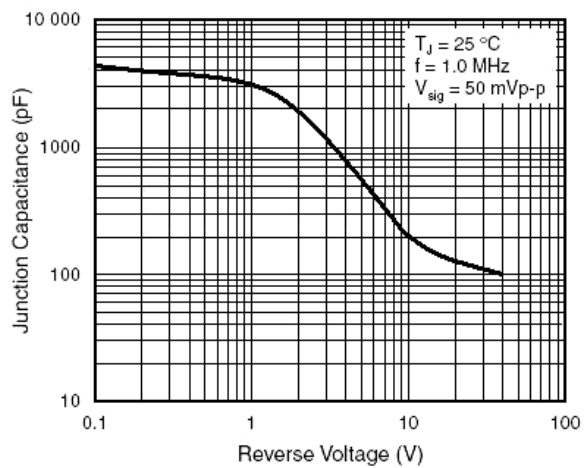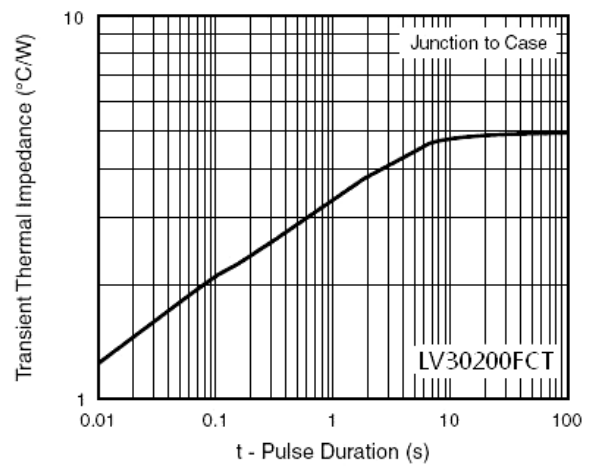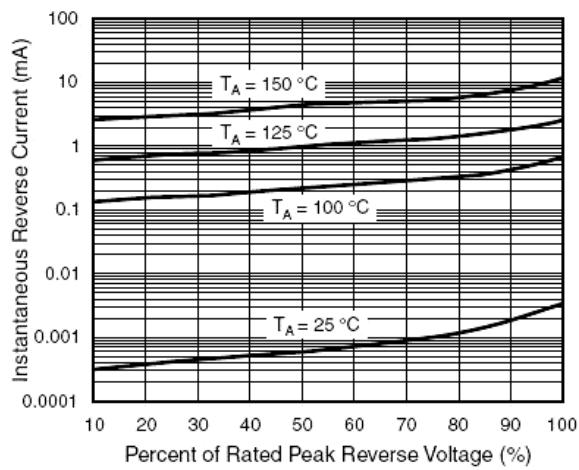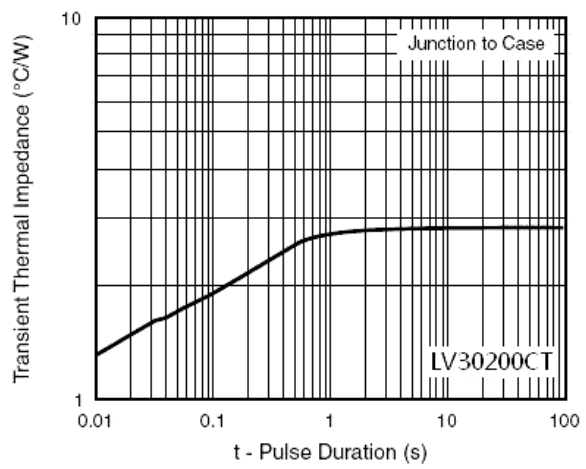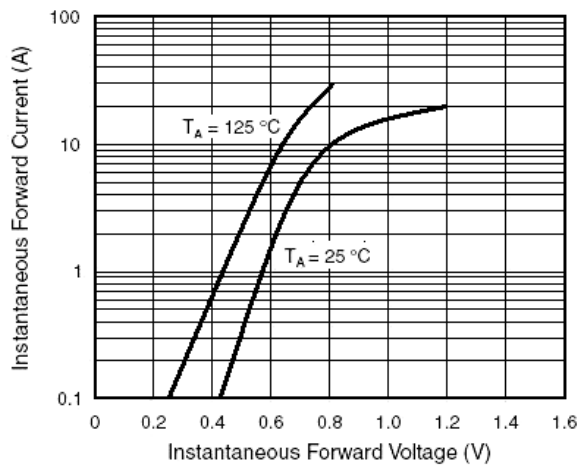

/ Package Dimensions


TQ-220

单位: mm

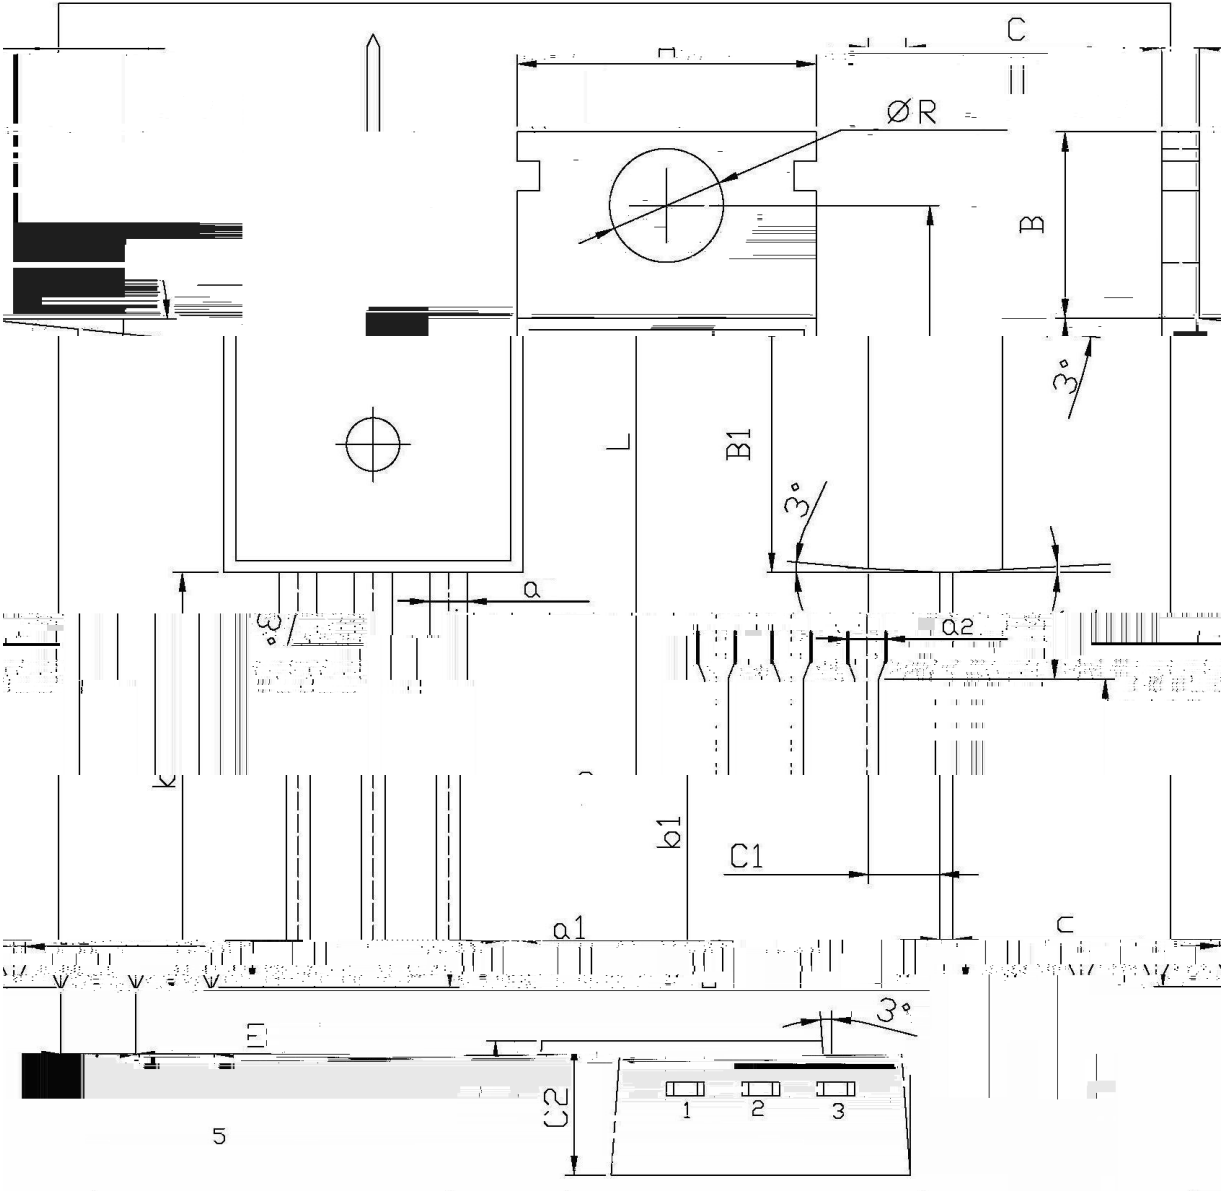


Symbol	Min	Max	Symbol	Min	Max
L	9.8	10.2	B	6.3	6.7
R	3.56	3.64	B1	9.0	9.4
L1	15.7	16.1	C1	2.2	2.6
b	12.6	13.6	C2	1.35	1.45
a	1.22	1.32	c	0.4	0.4
F	2.34	2.74	C2	1.25	1.45

/ Marking Instructions

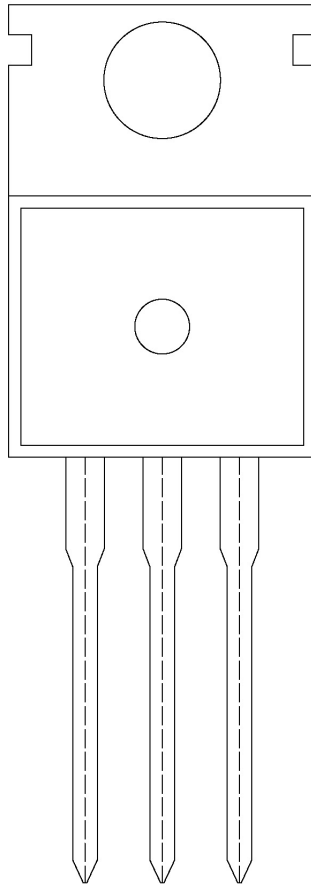

() / Temperature Profile for Dip Soldering(Pb-Free)

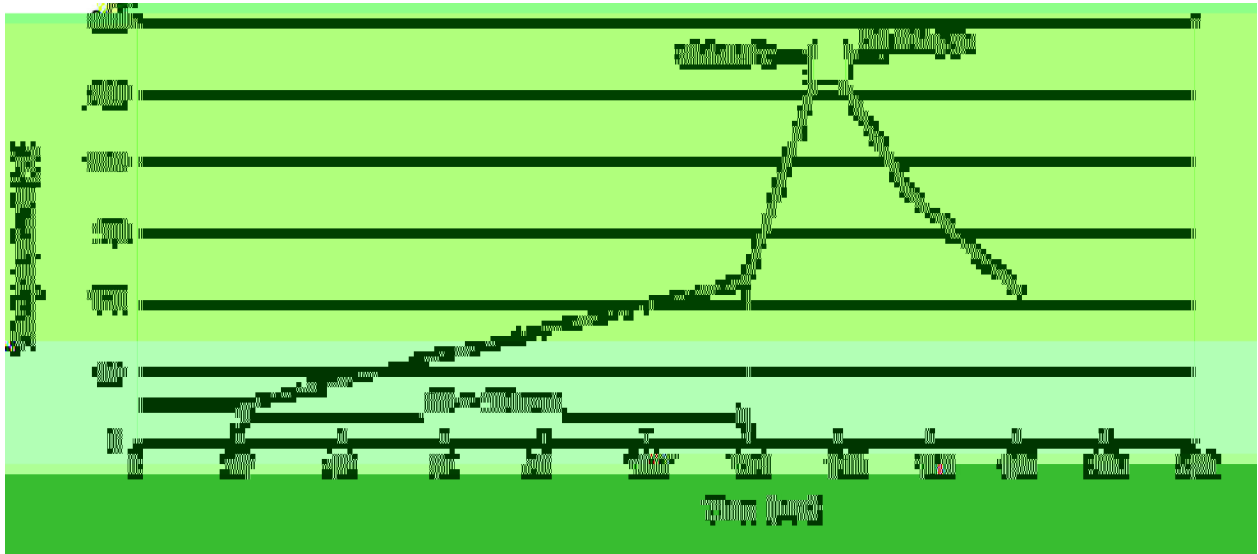 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸 :		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices