

MJD112



DATA SHEET

TO-252

NPN

/ Absolute Maximum Ratings(Ta=25)


	℃		
			℃
			℃

≤ μ ≤


/ Electrical Characteristics(Ta=25)

≤ ≤ * ≤380us, ≤2%

/ Electrical Characteristic Curve

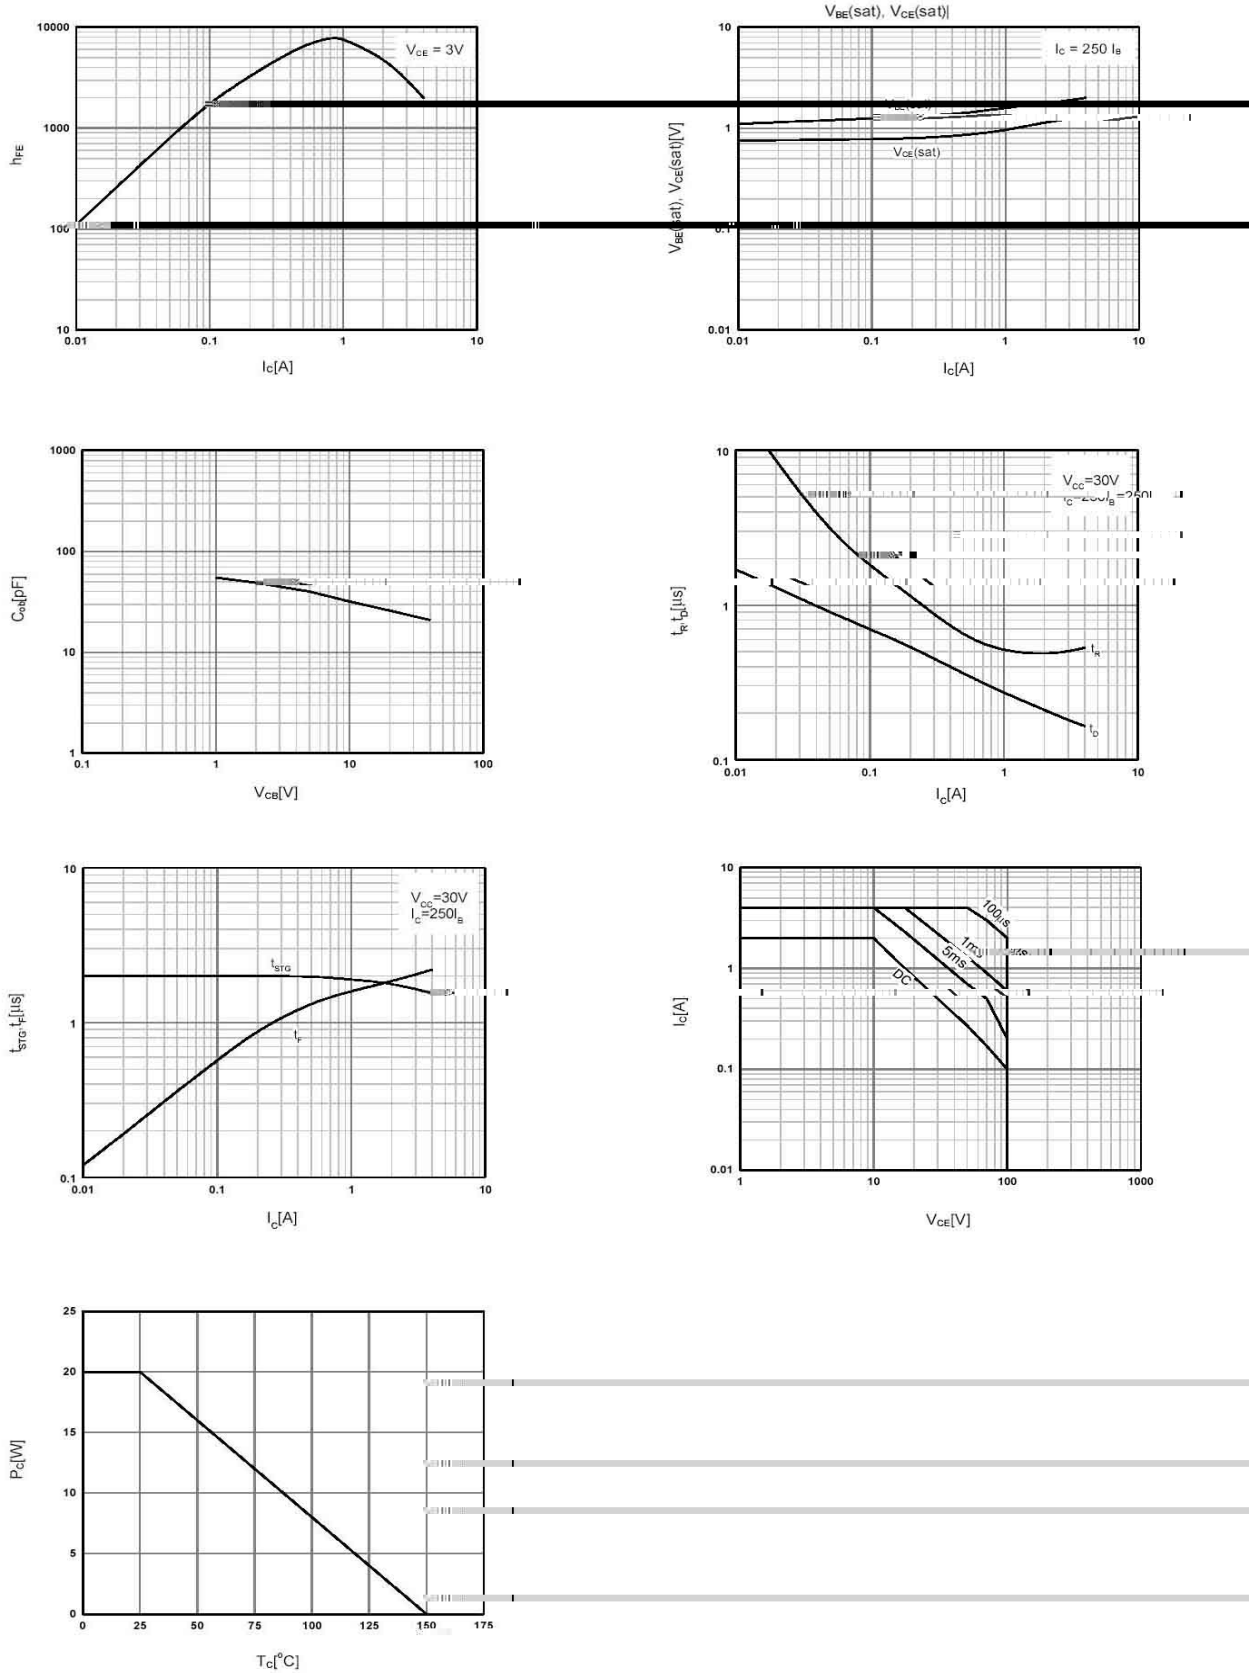

/ Package Dimensions

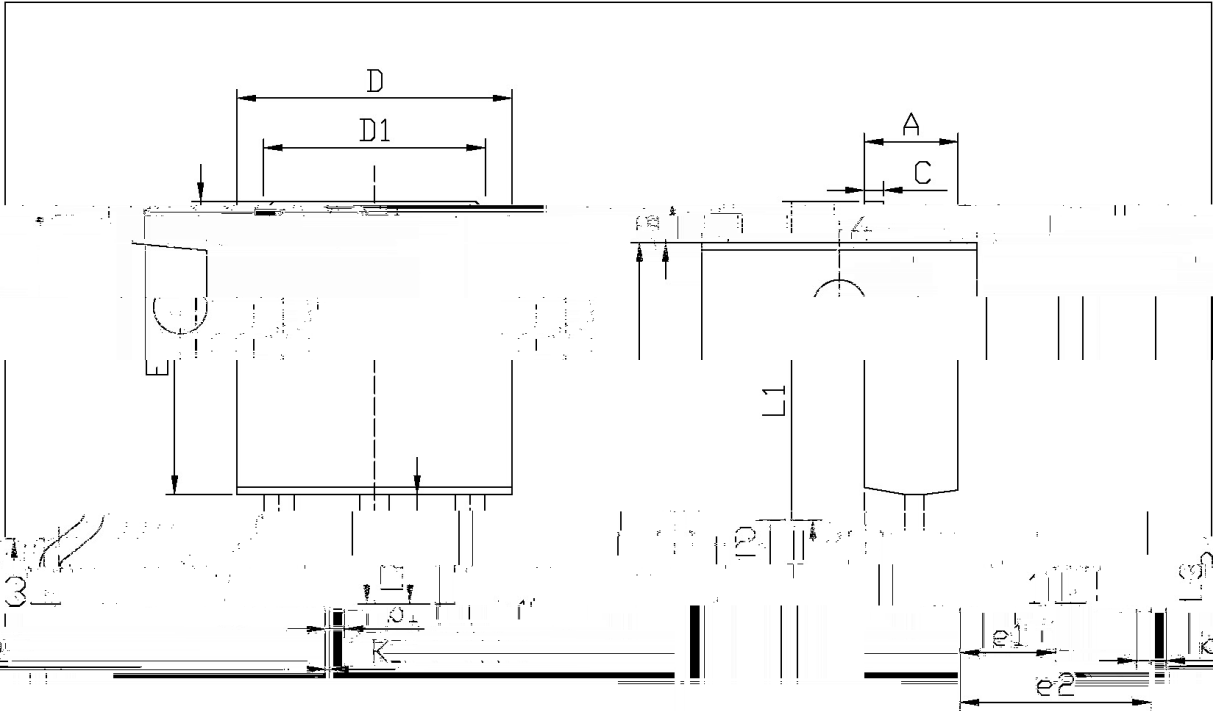


单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
C	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10


TO-252

/ Marking Instructions

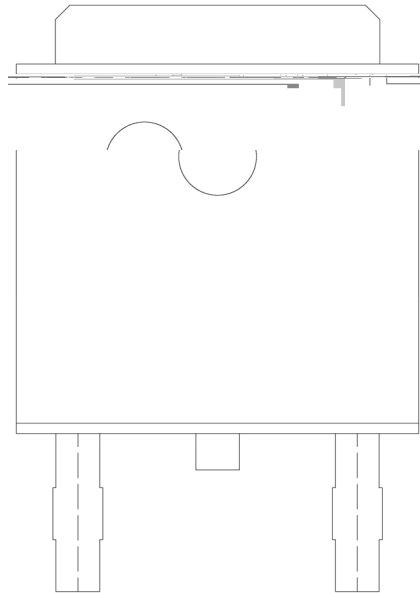

MJD112

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

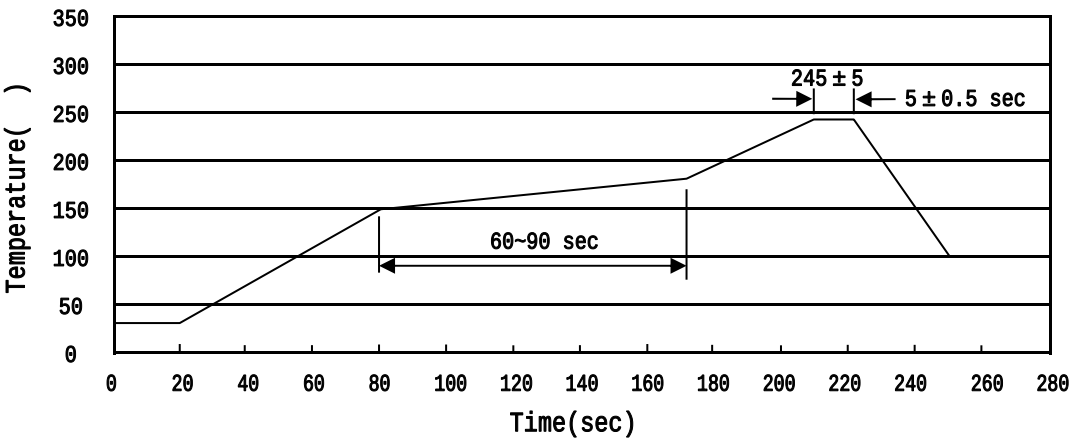

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

/ Notices