


/ Revised record

A	2018-5				
B	2021-2-18	7			

SSL54C~SSL510C



DATA SHEET

40~100V

5.0A

$$:$$

```
.281 1 Tf 0 0 0 sc 0 0 0 SC 0 Tr 8.25 64.347 TD [( )]TJ ET 0.731 Tf 0 0 0 sc 0 0 0 SC 0 SC 0 Tr 32.546 67.122 TD [( & )]TJ ET BT 10.56 0 0 1010.56 0.7 1 Tf 0 0 0 sc 0 0 0 SC 0 Tr 0 Tr 32.546 67.122 TD [( & )]TJ ET BT 10.56 0 0 1056 66 0.7 1 Tf 0 0 0 sc 0 0 0 SC 0 Qq 63 314.85 m 63 288.4sc 01396 67288.4sc 01396 67314.85 0 0 S 7
```

61053m /F8 1 Tf 0 m /F8 1 0 0 sc 0 0 0 SC 0 Tr 25.773 68.611 TD

/ Absolute Maximum Ratings(Ta=25)


参数	符号	数值					单位
	()						
							℃
							℃
							℃

)
)

/ Electrical Characteristics(Ta=25)


参数	符号	测试条件	数值					单位	
		℃							
		℃							






/ Package Dimensions


SMC

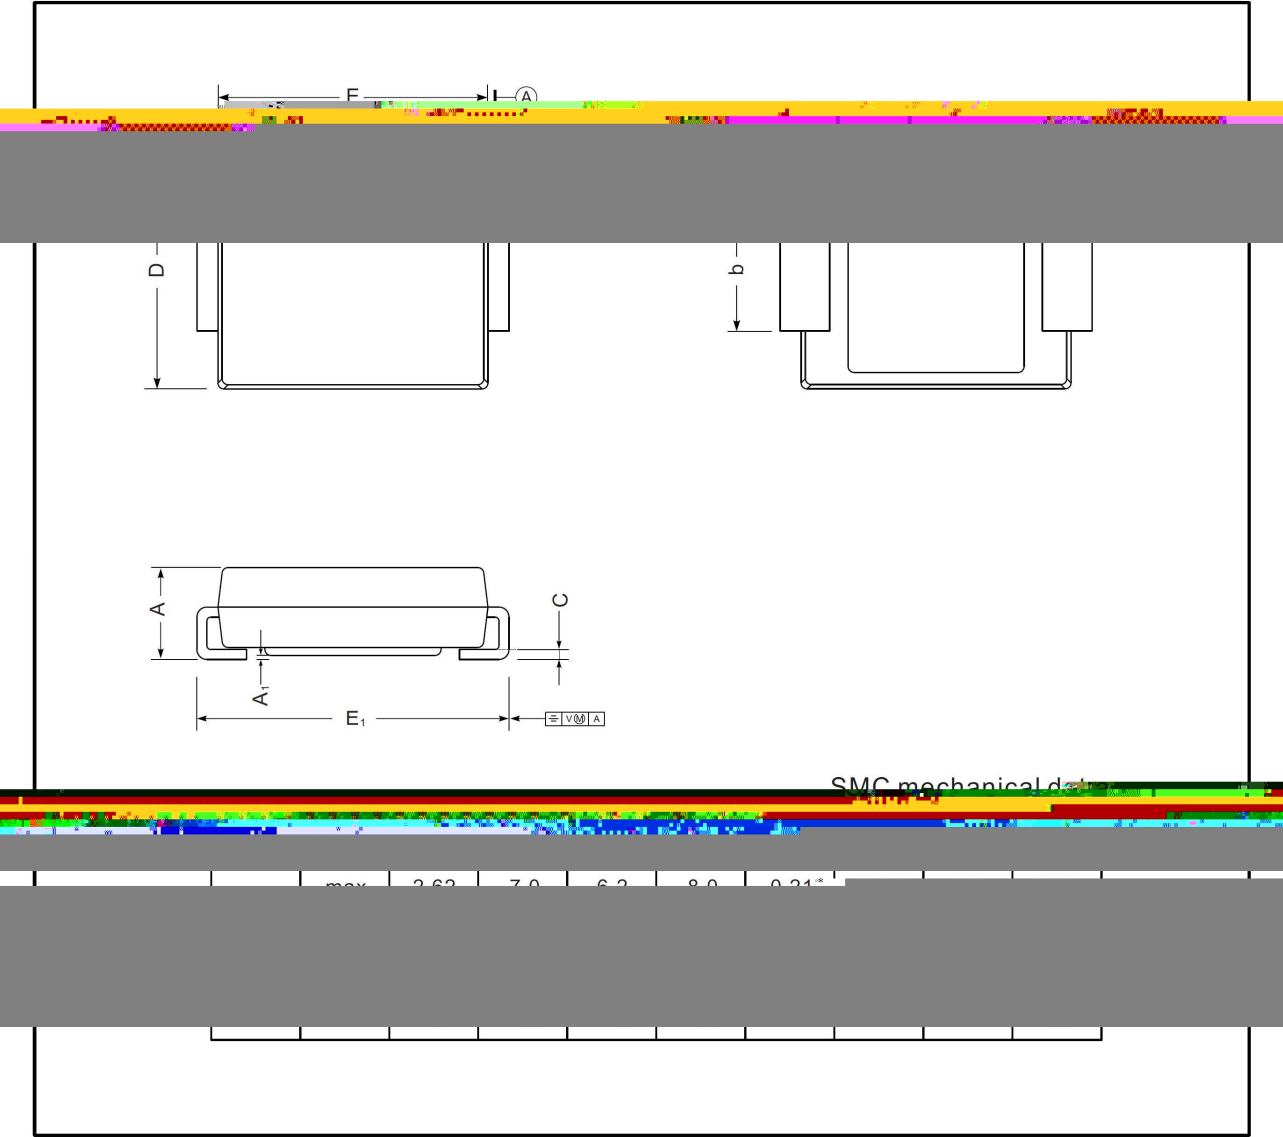




/ Marking Instructions

Marking

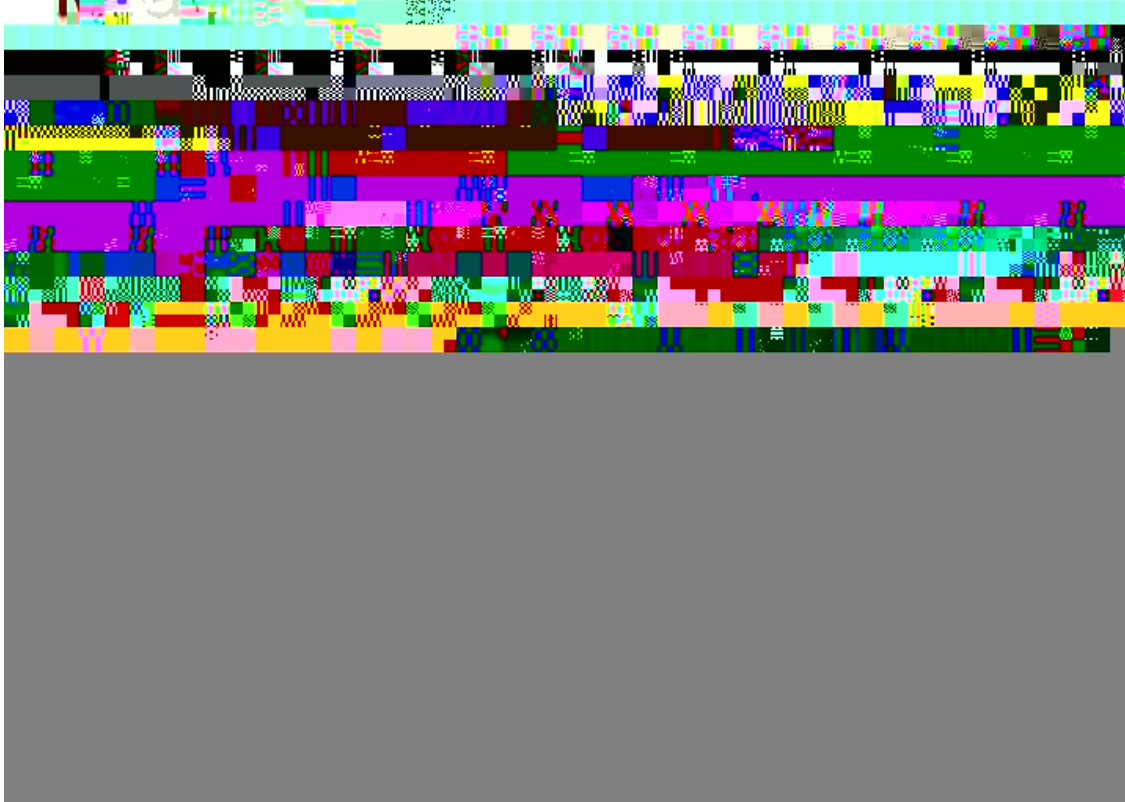



**** : 为生产批号追溯码,第1个*为年月代码,后面3个*为当月小批号代码

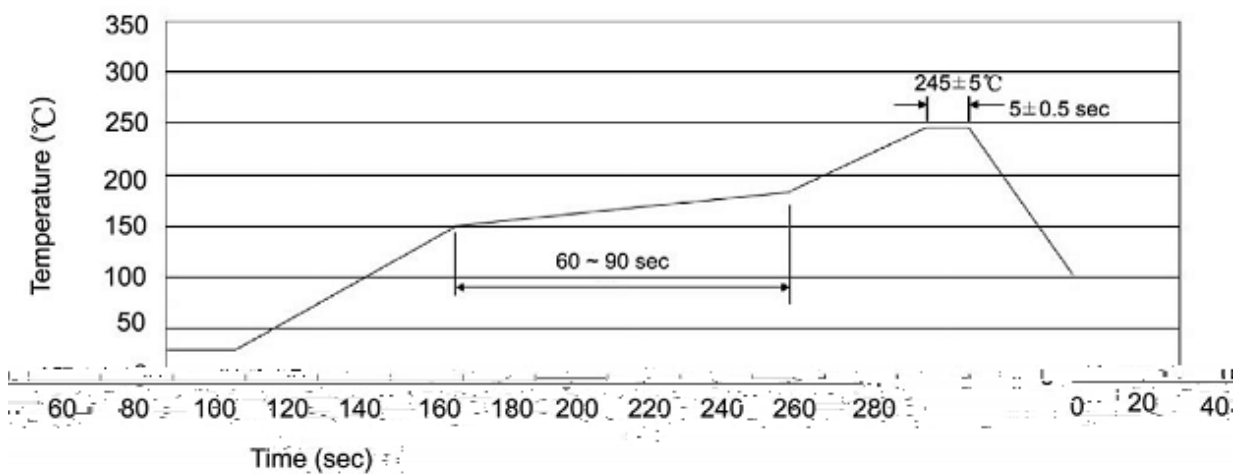
$$\begin{array}{ccccccc} & & & & & & ^\circ\text{C} \\ \pm & & & & \pm & & \pm \\ & & & & & & ^\circ\text{C} \\ & & & & & & ^\circ\text{C} \\ & & & & & & \pm \\ & & & & & & ^\circ\text{C} \end{array}$$

/ Resistance to Soldering Heat Test Conditions

$$\pm \text{ }^{\circ}\text{C} \qquad \pm \qquad \qquad \pm \text{ }^{\circ}\text{C} \qquad \pm$$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices