


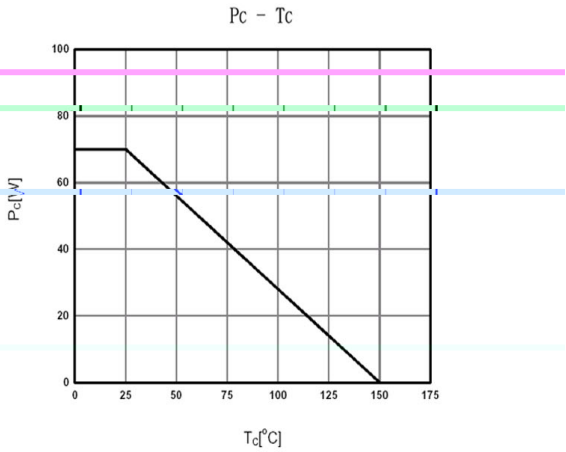
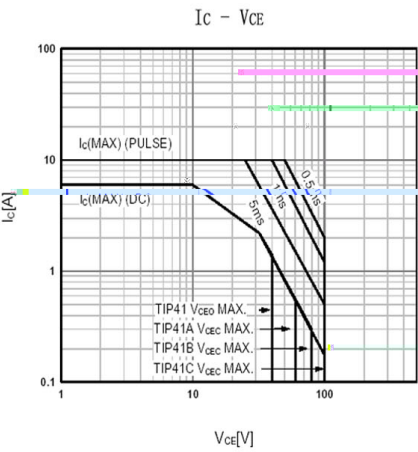
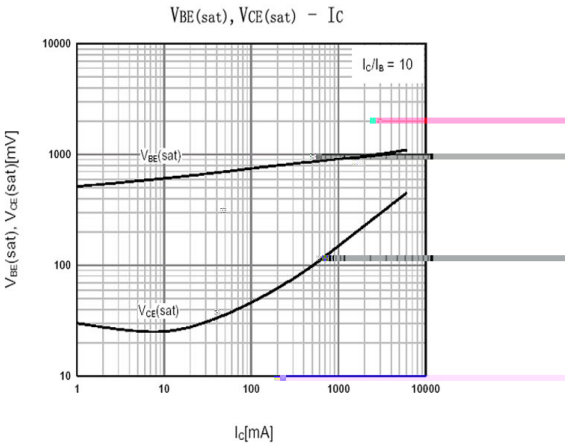


/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

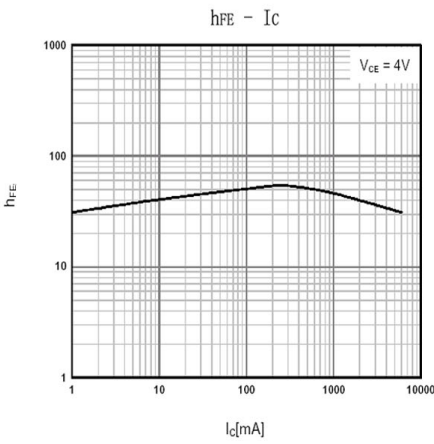


/ Package Dimensions

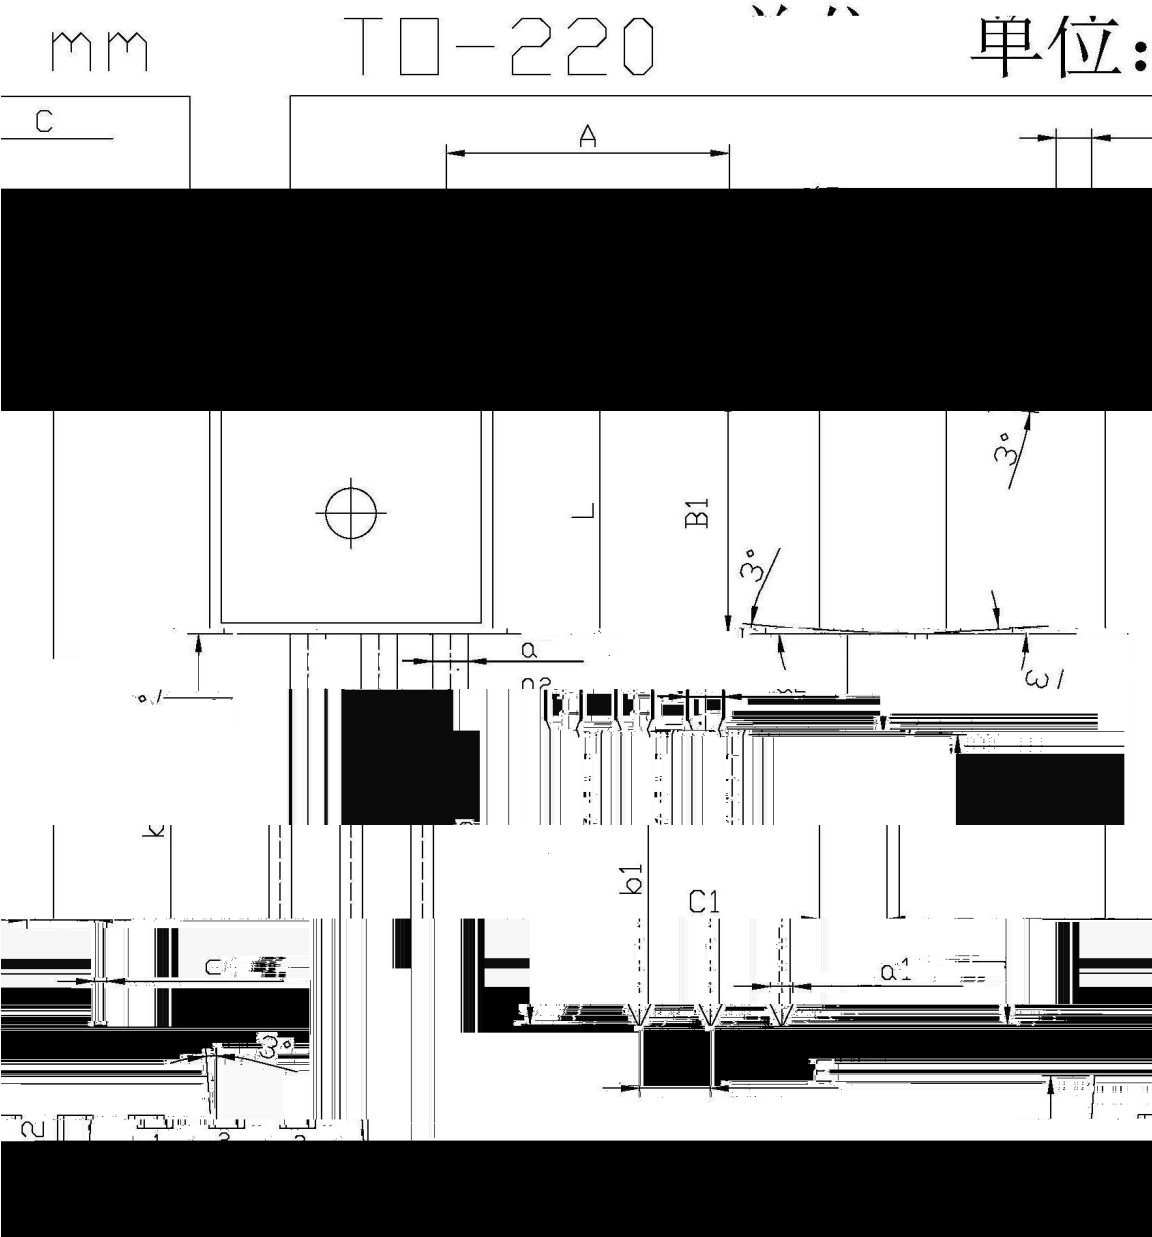


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
a	1.5	1.6	b1	0.3	0.4
B1	9.0	9.4	C1	1.3	1.5
L	1.5	1.6	a1	0.3	0.4
16.1	1.32	0.4	0.6	1.2	1.4
22	1.25	1.45	1.25	1.45	1.65
24	1.25	1.45	1.25	1.45	1.65
25	1.25	1.45	1.25	1.45	1.65

/ Marking Instructions

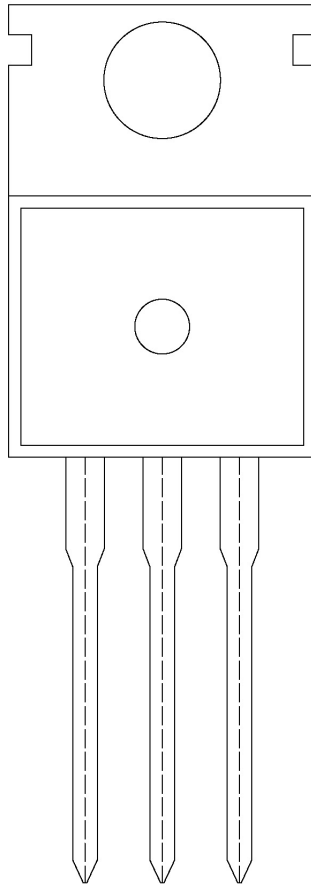

() / Temperature Profile for Dip Soldering(Pb-Free)

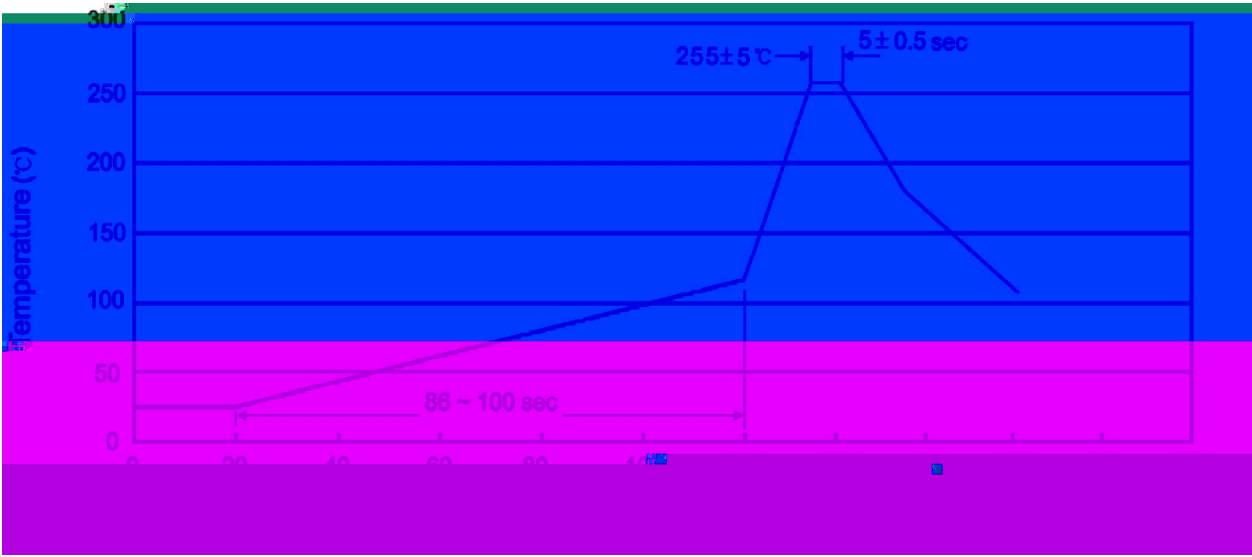

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices